
ACQUTEK CORPORATION PU-1286

80286 **Processor Processor Speed** 12/16MHz Unidentified **Chip Set Video Chip Set** None **Maximum Onboard Memory** 2MB **Maximum Video Memory** None Cache None **BIOS** Award

Dimensions 220mm x 107mm

I/O Options None NPU Options 80287

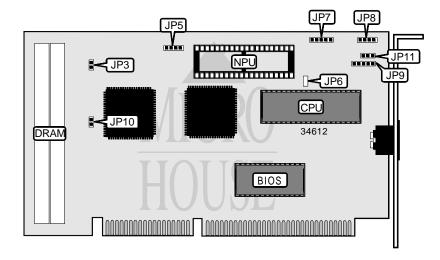

CONNECTIONS				
Purpose	Location	Purpose	Location	
Speaker	JP5	External battery	JP9	
Power LED & keylock	JP7	Reset switch	JP10	
Power connector	JP8			

Continued on next page. . .

ACQUTEK CORPORATION P U - I 2 8 6

. . . continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
CPU clock speed select /2	JP3	Open		
CPU clock speed select /4	JP3	Closed		
í Factory configured - do not alter	JP6	Unidentified		
Battery type select internal	JP11	Unidentified		
Battery type select external	JP11	Unidentified		

	SIN	1M CONFIGURATION
Note: Boa	ard accepts 512KB/2MB memory. The c	hip types are unidentified.