


CSS LABORATORIES, INC.

SB - 6862

Processor	Pentium Pro
Processor Speed	180/200MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	1GB
Maximum Video Memory	None
Cache	256/512KB (located on Pentium Pro CPU)
BIOS	AMI
Dimensions	Unidentified
I/O Options	Floppy drive interface, IDE interfaces (2), parallel port, serial ports (2), VRM connectors (2), USB connectors (2)
NPU Options	None

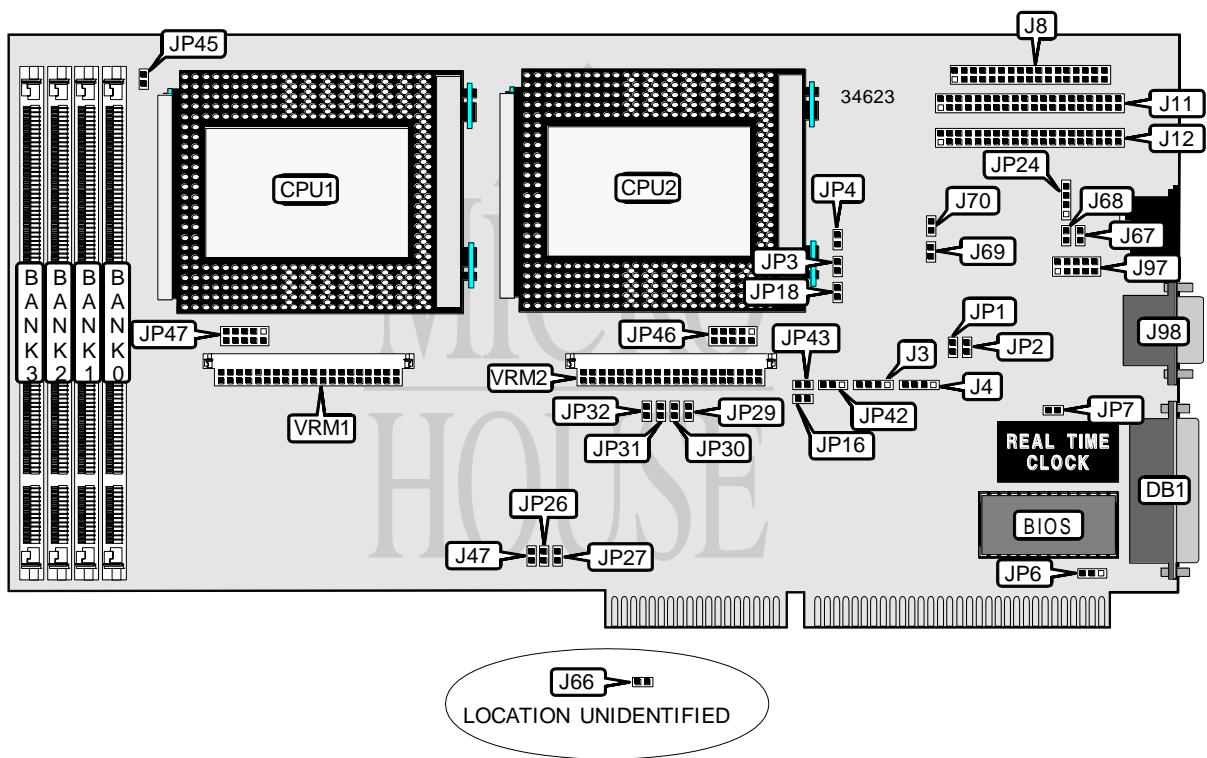

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	DB1	Serial port 2	J97
USB connector	J3	Serial port 1	J98
USB connector	J4	Chassis fan power	JP18
Floppy drive interface	J8	Chassis fan power	JP45
IDE interface 1	J11	VRM connector	VRM1
IDE interface 2	J12	VRM connector	VRM2

Continued on next page. . .

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J47	Closed
í Factory configured - do not alter	J66	Open
í Factory configured - do not alter	J67	Open
í Factory configured - do not alter	J68	Unidentified
í Factory configured - do not alter	J69	Unidentified
í Factory configured - do not alter	J70	Open
í Factory configured - do not alter	JP1	Open
í Factory configured - do not alter	JP2	Open
í Factory configured - do not alter	JP6	Unidentified
í Factory configured - do not alter	JP7	Unidentified
í Factory configured - do not alter	JP16	Open
í Factory configured - do not alter	JP24	Open
í Factory configured - do not alter	JP42	Unidentified
í Factory configured - do not alter	JP43	Open
í Factory configured - do not alter	JP46	Open
í Factory configured - do not alter	JP47	Open

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 2M x 64	None	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
40MB	(1) 1M x 64	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 1M x 64	(1) 4M x 64	None	None
40MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 4M x 64	None	None
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
56MB	(1) 1M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None

Continued on next page. . .

CSS LABORATORIES, INC.
 SB - 6862

... continued from previous page

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
72MB	(1) 8M x 64	(1) 1M x 64	None	None
72MB	(1) 1M x 64	(1) 4M x 64	(1) 4M x 64	None
80MB	(1) 2M x 64	(1) 8M x 64	None	None
80MB	(1) 2M x 64	(1) 4M x 64	(1) 4M x 64	None
80MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64	None
88MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 8M x 64	None	None
104MB	(1) 1M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
112MB	(1) 2M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 16M x 64	None	None	None
136MB	(1) 16M x 64	(1) 1M x 64	None	None
136MB	(1) 1M x 64	(1) 8M x 64	(1) 8M x 64	None
144MB	(1) 2M x 64	(1) 16M x 64	None	None
144MB	(1) 2M x 64	(1) 8M x 64	(1) 8M x 64	None
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64	None
152MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	None
160MB	(1) 16M x 64	(1) 4M x 64	None	None
160MB	(1) 4M x 64	(1) 8M x 64	(1) 8M x 64	None
176MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64	None
192MB	(1) 16M x 64	(1) 8M x 64	None	None
200MB	(1) 1M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
208MB	(1) 2M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
224MB	(1) 4M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
224MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 32M x 64	None	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
264MB	(1) 32M x 64	(1) 1M x 64	None	None
264MB	(1) 1M x 64	(1) 16M x 64	(1) 16M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 2M x 64	None	None

Continued on next page. . .

... continued from previous page

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
272MB	(1) 2M x 64	(1) 16M x 64	(1) 16M x 64	None
280MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64	None
288MB	(1) 4M x 64	(1) 16M x 64	(1) 16M x 64	None
304MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64	None
320MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None	None
352MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 32M x 64	None	None
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64	None
392MB	(1) 1M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
400MB	(1) 2M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
416MB	(1) 4M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
448MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None	None
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64	None
520MB	(1) 1M x 64	(1) 32M x 64	(1) 32M x 64	None
528MB	(1) 2M x 64	(1) 32M x 64	(1) 32M x 64	None
544MB	(1) 4M x 64	(1) 32M x 64	(1) 32M x 64	None
640MB	(1) 16M x 64	(1) 32M x 64	(1) 32M x 64	None
640MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
776MB	(1) 1M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
784MB	(1) 2M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
800MB	(1) 4M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
1024MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium Pro CPU.

CPU SPEED SELECTION						
CPU speed	Clock speed	Multiplier	JP3	JP4	JP26	JP27
180MHz	60MHz	3x	Open	Closed	Closed	Open
200MHz	66MHz	3x	Closed	Open	Open	Closed

CPU SPEED SELECTION (CON'T)						
CPU speed	Clock speed	Multiplier	JP29	JP30	JP31	JP32
180MHz	60MHz	3x	Closed	Open	Closed	Closed
200MHz	66MHz	3x	Closed	Open	Closed	Closed