


FIRST INTERNATIONAL COMPUTER, INC.

PA-2010+

Processor	CX M1/CX M2/IBM M1/IBM M2/AM K5/AM K6/Pentium
Processor Speed	90/100/120/133/150/166/180/225/200/233MHz
Chip Set	VIA
Video Chip Set	None
Maximum Onboard Memory	512MB (EDO supported)
Maximum Video Memory	None
Cache	256/512KB
BIOS	Award
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse interface, serial ports (2), IR connector, USB connectors (2), ATX power connector
NPU Options	None

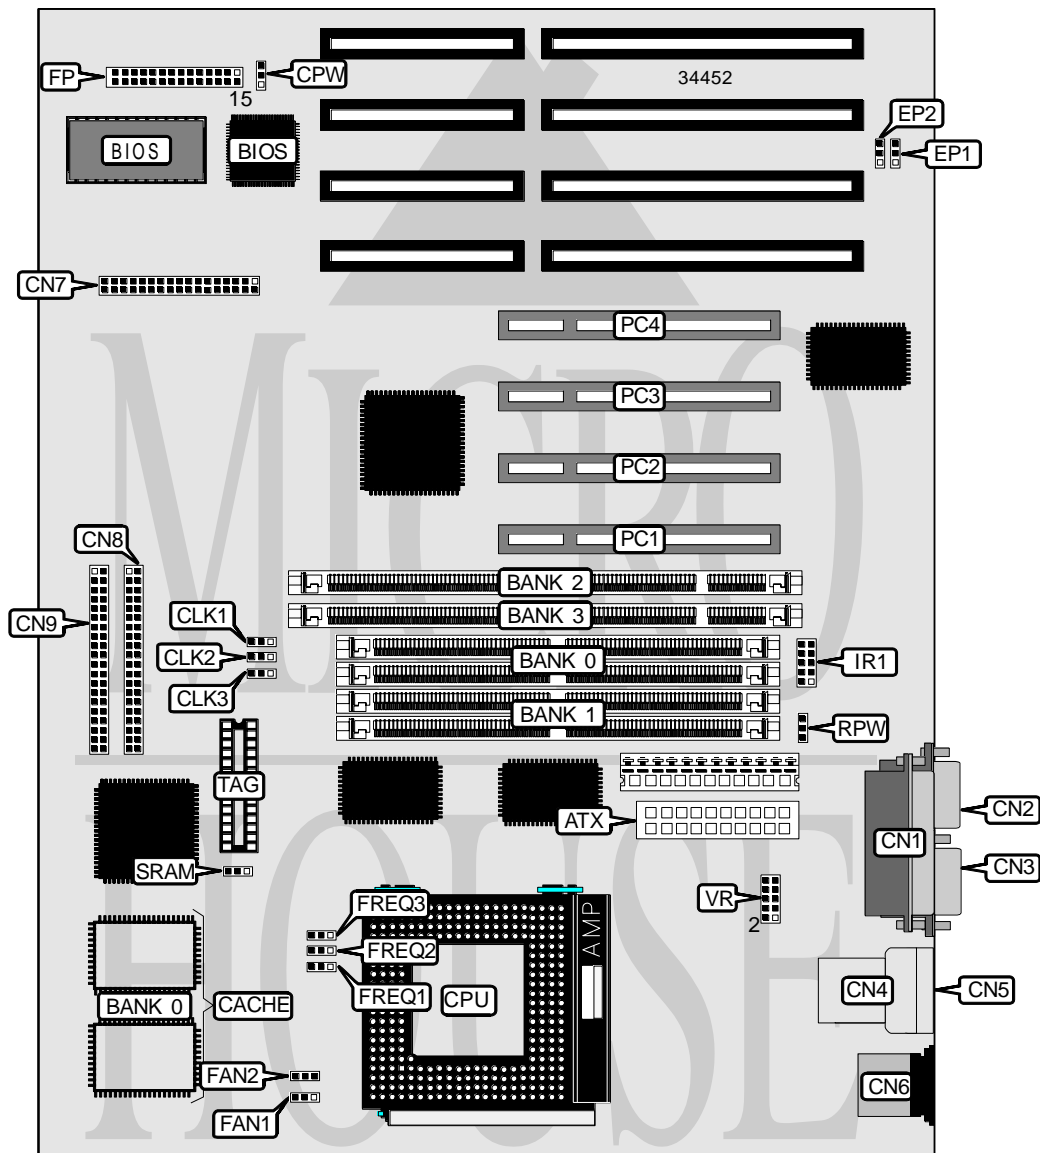

Continued on next page. . .

FIRST INTERNATIONAL COMPUTER, INC.

PA-2010+

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	Power LED & keylock	FP/pins 1 - 5
Parallel port	CN1	Turbo LED	FP/pins 7 & 8
Serial port 2	CN2	Green PC connector	FP/pins 10 & 11
Serial port 1	CN3	Green PC LED	FP/pins 13 & 14
USB connector 1	CN4	Speaker	FP/pins 15 - 18
USB connector 2	CN5	IDE interface LED	FP/pins 20 & 21
PS/2 mouse port	CN6	Remote power connector	FP/pins 23 & 24
Floppy drive interface	CN7	Reset switch	FP/pins 27 & 28
IDE interface 1	CN8	IR connector	IR1
IDE interface 2	CN9	32-bit PCI slots	PC1 – PC4
CPU fan power	FAN1	Remote power connector	RPW
Chassis fan power	FAN2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Password normal operation	CPW	Open
Password clear	CPW	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36
128MB	(2) 16M x 36	None
136MB	(2) 16M x 36	(2) 1M x 36
144MB	(2) 16M x 36	(2) 2M x 36
160MB	(2) 16M x 36	(2) 4M x 36
192MB	(2) 16M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36
256MB	(2) 32M x 36	None
264MB	(2) 32M x 36	(2) 1M x 36

Continued on next page...

FIRST INTERNATIONAL COMPUTER, INC.

PA-2010+

... continued from previous page

DRAM CONFIGURATION (CON'T)		
Size	Bank 0	Bank 1
272MB	(2) 32M x 36	(2) 2M x 36
288MB	(2) 32M x 36	(2) 4M x 36
320MB	(2) 32M x 36	(2) 8M x 36
384MB	(2) 32M x 36	(2) 16M x 36
512MB	(2) 32M x 36	(2) 32M x 36

Note: Board accepts EDO memory. Do not install SIMMs & DIMMs at the same time.

DIMM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(1) 1M x 64	None
16MB	(1) 2M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
40MB	(1) 4M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64

CACHE CONFIGURATION		
Size	Bank 0	TAG
256KB	(2) 32K x 32	(1) 16K/32K x 8
512KB	(2) 64K x 32	(1) 16K/32K x 8

CACHE JUMPER CONFIGURATION	
Type	SRAM
í Intel burst	Pins 1 & 2 closed
Linear burst	Pins 2 & 3 closed

CPU SPEED SELECTION (CX M1)								
CPU speed	Clock speed	Multiplier	CLK1	CLK2	CLK3	FREQ1	FREQ2	FREQ3
133MHz	55MHz	2x	2 & 3	2 & 3	2 & 3	2 & 3	1 & 2	1 & 2
150MHz	60MHz	2x	2 & 3	1 & 2	2 & 3	2 & 3	1 & 2	1 & 2
166MHz	66MHz	2x	1 & 2	1 & 2	2 & 3	2 & 3	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

Continued on next page. . .

FIRST INTERNATIONAL COMPUTER, INC.

PA-2010+

... continued from previous page

CPU SPEED SELECTION (CX M2)

CPU speed	Clock speed	Multiplier	CLK1	CLK2	CLK3	FREQ1	FREQ2	FREQ3
150MHz	60MHz	2.5x	2 & 3	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
166MHz	66MHz	2.5x	1 & 2	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
180MHz	75MHz	2.5x	1 & 2	2 & 3	2 & 3	2 & 3	2 & 3	1 & 2
225MHz	75MHz	3x	1 & 2	2 & 3	2 & 3	1 & 2	2 & 3	1 & 2
200MHz	66MHz	3x	1 & 2	1 & 2	2 & 3	1 & 2	2 & 3	1 & 2
233MHz	66MHz	3.5x	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (IBM M1)

CPU speed	Clock speed	Multiplier	CLK1	CLK2	CLK3	FREQ1	FREQ2	FREQ3
133MHz	55MHz	2x	2 & 3	2 & 3	2 & 3	2 & 3	1 & 2	1 & 2
150MHz	60MHz	2x	2 & 3	1 & 2	2 & 3	2 & 3	1 & 2	1 & 2
166MHz	66MHz	2x	1 & 2	1 & 2	2 & 3	2 & 3	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (IBM M2)

CPU speed	Clock speed	Multiplier	CLK1	CLK2	CLK3	FREQ1	FREQ2	FREQ3
150MHz	60MHz	2.5x	2 & 3	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
166MHz	66MHz	2.5x	1 & 2	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
180MHz	75MHz	2.5x	1 & 2	2 & 3	2 & 3	2 & 3	2 & 3	1 & 2
225MHz	75MHz	3x	1 & 2	2 & 3	2 & 3	1 & 2	2 & 3	1 & 2
200MHz	66MHz	3x	1 & 2	1 & 2	2 & 3	1 & 2	2 & 3	1 & 2
233MHz	66MHz	3.5x	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (AM K5)

CPU speed	Clock speed	Multiplier	CLK1	CLK2	CLK3	FREQ1	FREQ2	FREQ3
90MHz	60MHz	1.5x	2 & 3	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2
100MHz	66MHz	1.5x	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2
120MHz	60MHz	1.5x	2 & 3	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2
133MHz	66MHz	1.5x	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2
150MHz	60MHz	1.75x	2 & 3	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
166MHz	66MHz	1.75x	1 & 2	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
200MHz	66MHz	2x	1 & 2	1 & 2	2 & 3	1 & 2	2 & 3	1 & 2

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (AM K6)

CPU speed	Clock speed	Multiplier	CLK1	CLK2	CLK3	FREQ1	FREQ2	FREQ3
166MHz	66MHz	2.5x	1 & 2	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
200MHz	66MHz	3x	1 & 2	1 & 2	2 & 3	1 & 2	2 & 3	1 & 2
233MHz	66MHz	3.5	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

Continued on next page...

FIRST INTERNATIONAL COMPUTER, INC.

PA-2010+

... continued from previous page

CPU SPEED SELECTION (INTEL)								
CPU speed	Clock speed	Multiplier	CLK1	CLK2	CLK3	FREQ1	FREQ2	FREQ3
90MHz	60MHz	1.5x	2 & 3	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2
100MHz	66MHz	1.5x	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2
120MHz	60MHz	2x	2 & 3	1 & 2	2 & 3	2 & 3	1 & 2	1 & 2
133MHz	66MHz	2x	1 & 2	1 & 2	2 & 3	2 & 3	1 & 2	1 & 2
150MHz	60MHz	2.5x	2 & 3	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
166MHz	66MHz	2.5x	1 & 2	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
200MHz	66MHz	3x	1 & 2	1 & 2	2 & 3	1 & 2	2 & 3	1 & 2
233MHz	66MHz	3.5	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU VOLTAGE SELECTION (SINGLE)	
Voltage	VR
3.3v	Pins 3 & 4 closed
3.5v	Pins 1 & 2 closed

CPU VOLTAGE SELECTION (DUAL)		
Voltage	V core	VR
3.3v	2.8v	Pins 9 & 10 closed
3.3v	2.9v	Pins 7 & 8 closed
3.3v	3.2v	Pins 5 & 6 closed

1M FLASH BIOS SELECTION		
Type	EP1	EP2
Intel (normal)	Pins 2 & 3 closed	Pins 2 & 3 closed
Intel (program boot block)	Pins 2 & 3 closed	Pins 1 & 2 closed
SST	Pins 2 & 3 closed	Open

2M FLASH BIOS SELECTION		
Type	EP1	EP2
AMD	Pins 1 & 2 closed	Pins 2 & 3 closed
ATMEL	Open	Pins 2 & 3 closed
MX	Open	Pins 2 & 3 closed
SST	Pins 1 & 2 closed	Pins 2 & 3 closed