


# ASUS COMPUTER INTERNATIONAL PCI/I-P5MP3 (REV. 1.2)

<b>Processor</b>	Pentium
<b>Processor Speed</b>	60/66MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	192MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	256/512KB
<b>BIOS</b>	Award
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit PCI slots (3)
<b>NPU Options</b>	None

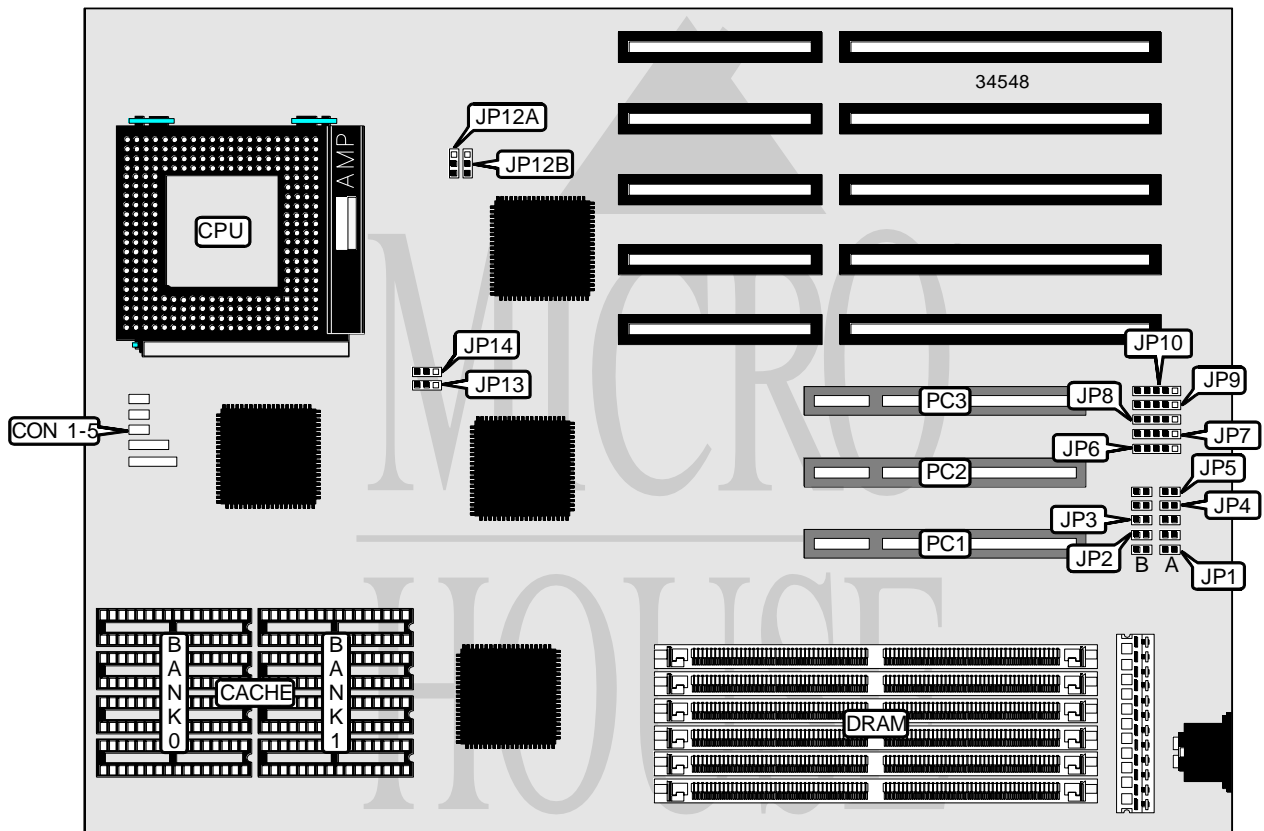

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	CON1	Turbo switch	CON4
Speaker	CON2	Turbo LED	CON5
Reset switch	CON3	32-bit PCI slots	PC1 – PC3

Continued on next page. . .

ASUS COMPUTER INTERNATIONAL  
 PCI/I-P5MP3 (REV. 1.2)

... continued from previous page

SIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
2MB	(2) 256K x 36	None	None
4MB	(2) 256K x 36	(2) 256K x 36	None
4MB	(2) 512K x 36	None	None
6MB	(2) 256K x 36	(2) 512K x 36	None
6MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36
8MB	(2) 512K x 36	(2) 512K x 36	None
10MB	(2) 1M x 36	(2) 256K x 36	None
12MB	(2) 512K x 36	(2) 1M x 36	None
14MB	(2) 256K x 36	(2) 512K x 36	(2) 1M x 36
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
18MB	(2) 2M x 36	(2) 256K x 36	None
18MB	(2) 1M x 36	(2) 1M x 36	(2) 256K x 36
20MB	(2) 1M x 36	(2) 1M x 36	(2) 512K x 36
20MB	(2) 2M x 36	(2) 512K x 36	None
22MB	(2) 2M x 36	(2) 512K x 36	(2) 256K x 36
24MB	(2) 2M x 36	(2) 1M x 36	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
26MB	(2) 2M x 36	(2) 1M x 36	(2) 256K x 36
28MB	(2) 2M x 36	(2) 1M x 36	(2) 512K x 36
32MB	(2) 4M x 36	None	None
32MB	(2) 2M x 36	(2) 2M x 36	None
34MB	(2) 4M x 36	(2) 256K x 36	None
38MB	(2) 4M x 36	(2) 256K x 36	(2) 512K x 36
40MB	(2) 4M x 36	(2) 1M x 36	None
40MB	(2) 4M x 36	(2) 512K x 36	(2) 512K x 36
42MB	(2) 4M x 36	(2) 1M x 36	(2) 256K x 36
44MB	(2) 4M x 36	(2) 1M x 36	(2) 512K x 36
48MB	(2) 4M x 36	(2) 2M x 36	None
48MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36
50MB	(2) 4M x 36	(2) 2M x 36	(2) 256K x 36
52MB	(2) 4M x 36	(2) 2M x 36	(2) 512K x 36
56MB	(2) 4M x 36	(2) 2M x 36	(2) 1M x 36
64MB	(2) 8M x 36	None	None
64MB	(2) 4M x 36	(2) 4M x 36	None
66MB	(2) 8M x 36	(2) 256K x 36	None
66MB	(2) 4M x 36	(2) 4M x 36	(2) 256K x 36
68MB	(2) 8M x 36	(2) 512K x 36	None
68MB	(2) 4M x 36	(2) 4M x 36	(2) 512K x 36
70MB	(2) 8M x 36	(2) 256K x 36	(2) 512K x 36
72MB	(2) 8M x 36	(2) 512K x 36	(2) 512K x 36
74MB	(2) 8M x 36	(2) 1M x 36	(2) 256K x 36

Continued on next page. . .

ASUS COMPUTER INTERNATIONAL  
 PCI/I-P5MP3 (REV. 1.2)

... continued from previous page

SIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
76MB	(2) 8M x 36	(2) 512K x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36	None
80MB	(2) 8M x 36	(2) 1M x 36	(2) 1M x 36
82MB	(2) 8M x 36	(2) 2M x 36	(2) 256K x 36
84MB	(2) 8M x 36	(2) 2M x 36	(2) 512K x 36
88MB	(2) 8M x 36	(2) 2M x 36	(2) 1M x 36
96MB	(2) 8M x 36	(2) 4M x 36	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
96MB	(2) 8M x 36	(2) 2M x 36	(2) 2M x 36
98MB	(2) 8M x 36	(2) 4M x 36	(2) 256K x 36
100MB	(2) 8M x 36	(2) 4M x 36	(2) 512K x 36
104MB	(2) 8M x 36	(2) 4M x 36	(2) 1M x 36
112MB	(2) 8M x 36	(2) 4M x 36	(2) 2M x 36
128MB	(2) 8M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
130MB	(2) 8M x 36	(2) 8M x 36	(2) 256K x 36
132MB	(2) 8M x 36	(2) 8M x 36	(2) 512K x 36
136MB	(2) 1M x 36	(2) 8M x 36	(2) 8M x 36
144MB	(2) 2M x 36	(2) 8M x 36	(2) 8M x 36
160MB	(2) 4M x 36	(2) 8M x 36	(2) 8M x 36
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
256KB	(4) 32K x 8	(4) 32K x 8
512KB	(4) 64K x 8	(4) 64K x 8

CACHE JUMPER CONFIGURATION		
Size	JP13	JP14
None	Pins 1 & 2 closed	Pins 1 & 2 closed
256KB	Pins 2 & 3 closed	Pins 1 & 2 closed
512KB	Pins 2 & 3 closed	Pins 2 & 3 closed

FLASH BIOS SELECTION		
Setting	JP12A	JP12B
í EPROM	Pins 1 & 2 closed	Pins 1 & 2 closed
í 5v	Pins 1 & 2 closed	Pins 1 & 2 closed
12v	Pins 2 & 3 closed	Pins 1 & 2 closed

Continued on next page...

ASUS COMPUTER INTERNATIONAL  
 PCI/I-P5MP3 (REV. 1.2)

... continued from previous page

ISA INTERRUPT SELECTION					
IRQ	JP6	JP7	JP8	JP9	JP10
IRQ5	2 & 3	N/A	N/A	N/A	N/A
IRQ9	N/A	2 & 3	N/A	N/A	N/A
IRQ11	N/A	N/A	2 & 3	N/A	N/A
IRQ14	N/A	N/A	N/A	2 & 3	N/A
IRQ15	N/A	N/A	N/A	N/A	2 & 3

Note: Pins designated should be in the closed position

PCI INTERRUPT SELECTION (INT A)					
IRQ	JP6	JP7	JP8	JP9	JP10
IRQ5	1 & 2	N/A	N/A	N/A	N/A
IRQ9	N/A	1 & 2	N/A	N/A	N/A
IRQ11	N/A	N/A	1 & 2	N/A	N/A
IRQ14	N/A	N/A	N/A	1 & 2	N/A
IRQ15	N/A	N/A	N/A	N/A	1 & 2

Note: Pins designated should be in the closed position

PCI INTERRUPT SELECTION (INT B)					
IRQ	JP6	JP7	JP8	JP9	JP10
IRQ5	4 & 5	N/A	N/A	N/A	N/A
IRQ9	N/A	4 & 5	N/A	N/A	N/A
IRQ11	N/A	N/A	4 & 5	N/A	N/A
IRQ14	N/A	N/A	N/A	4 & 5	N/A
IRQ15	N/A	N/A	N/A	N/A	4 & 5

Note: Pins designated should be in the closed position

PCI INTERRUPT SELECTION (INT C)					
IRQ	JP1A/B	JP2A/B	JP3A/B	JP4A/B	JP5A/B
IRQ5	1 & 2	N/A	N/A	N/A	N/A
IRQ9	N/A	1 & 2	N/A	N/A	N/A
IRQ11	N/A	N/A	1 & 2	N/A	N/A
IRQ14	N/A	N/A	N/A	1 & 2	N/A
IRQ15	N/A	N/A	N/A	N/A	1 & 2

Note: Pins designated should be in the closed position

Continued on next page...

ASUS COMPUTER INTERNATIONAL  
PCI/I-P5MP3 (REV. 1.2)

... continued from previous page

PCI INTERRUPT SELECTION (INT D)					
IRQ	JP1A/B	JP2A/B	JP3A/B	JP4A/B	JP5A/B
IRQ5	4 & 5	N/A	N/A	N/A	N/A
IRQ9	N/A	4 & 5	N/A	N/A	N/A
IRQ11	N/A	N/A	4 & 5	N/A	N/A
IRQ14	N/A	N/A	N/A	4 & 5	N/A
IRQ15	N/A	N/A	N/A	N/A	4 & 5

Note: Pins designated should be in the closed position

**MISCELLANEOUS TECHNICAL NOTE**

An IRQ must be set for either a ISA or PCI bus. The default setting assigns IRQs 5, 11, 14 & 15 to the ISA bus and IRQ9 to INT A. PCI slot 1 is the slave and slots 2 & 3 are the masters.