


# DELL COMPUTER CORPORATION

## POWEREDGE 2200

<b>Processor</b>	Pentium II
<b>Processor Speed</b>	233/266/300MHz
<b>Chip Set</b>	Intel
<b>Video Chip Set</b>	ATI
<b>Maximum Onboard Memory</b>	512MB (EDO supported)
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	512KB (located on Pentium II CPU)
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	305mm x 244mm
<b>I/O Options</b>	32-bit PCI slots (3), floppy drive interface, Ultra Wide SCSI interface, parallel port, PS/2 mouse port, serial ports (2), VGA port, SMM connector
<b>NPU Options</b>	None

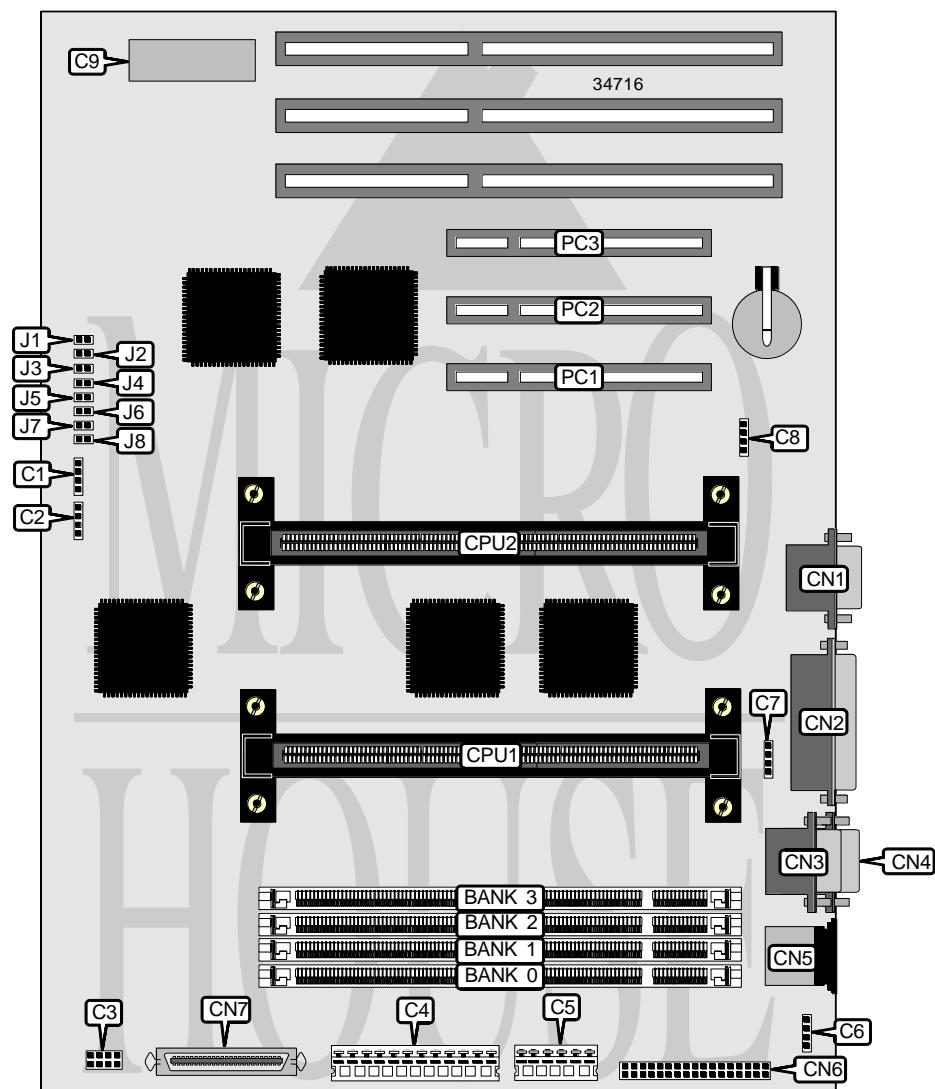

*Continued on next page . . .*

DELL COMPUTER CORPORATION  
POWEREDGE 2200

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Chassis fan power	C1	VGA port	CN1
IDE interface LED	C2	Parallel port	CN2
Front PANEL connector	C3	Serial port 1	CN3
3.3v power	C4	Serial port 2	CN4
3.3v auxiliary power	C5	PS/2 mouse port	CN5
Chassis fan power	C6	Floppy drive interface	CN6
Temperature sensor 1	C7	Ultra Wide SCSI interface	CN7
Temperature sensor 2	C8	32-bit PCI slots	PC1 – PC3
SMM connector	C9		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í System boot normal operation	J1	Open
System boot from a BIOS expansion card	J1	Closed
í On board video enabled	J2	Closed
On board video disabled	J2	Open
í EISA configuration normal operation	J3	Open
EISA configuration clear	J3	Closed
í Password enabled	J4	Closed
Password disabled	J4	Open
í Factory configured - do not alter	J8	Open

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
72MB	(1) 8M x 64	(1) 1M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None

Continued on next page...

DELL COMPUTER CORPORATION  
POWEREDGE 2200

... continued from previous page

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
128MB	(1) 16M x 64	None	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
136MB	(1) 16M x 64	(1) 1M x 64	None	None
144MB	(1) 16M x 64	(1) 2M x 64	None	None
160MB	(1) 16M x 64	(1) 4M x 64	None	None
192MB	(1) 16M x 64	(1) 8M x 64	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

Note: Board accepts EDO memory.

CACHE CONFIGURATION
Note: 512KB cache is located on the Pentium II CPU.

VIDEO MEMORY CONFIGURATION
Note: 1MB video memory is factory installed and is not configurable. The location is unidentified.

CPU SPEED SELECTION					
CPU speed	Clock speed	Multiplier	J5	J6	J7
233MHz	66MHz	3.5x	Closed	Open	Open
266MHz	66MHz	4x	Open	Closed	Open
300MHz	66MHz	4.5x	Open	Open	Closed