


CSS LABORATORIES, INC.

P B - 1 0 9 0 3

Processor	80486/Pentium
Processor Speed	Unidentified
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	None
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	355mm x 304mm
I/O Options	32-bit PCI slots (3), CPU slot, PS/2 mouse interface, IR connectors (2)
NPU Options	None

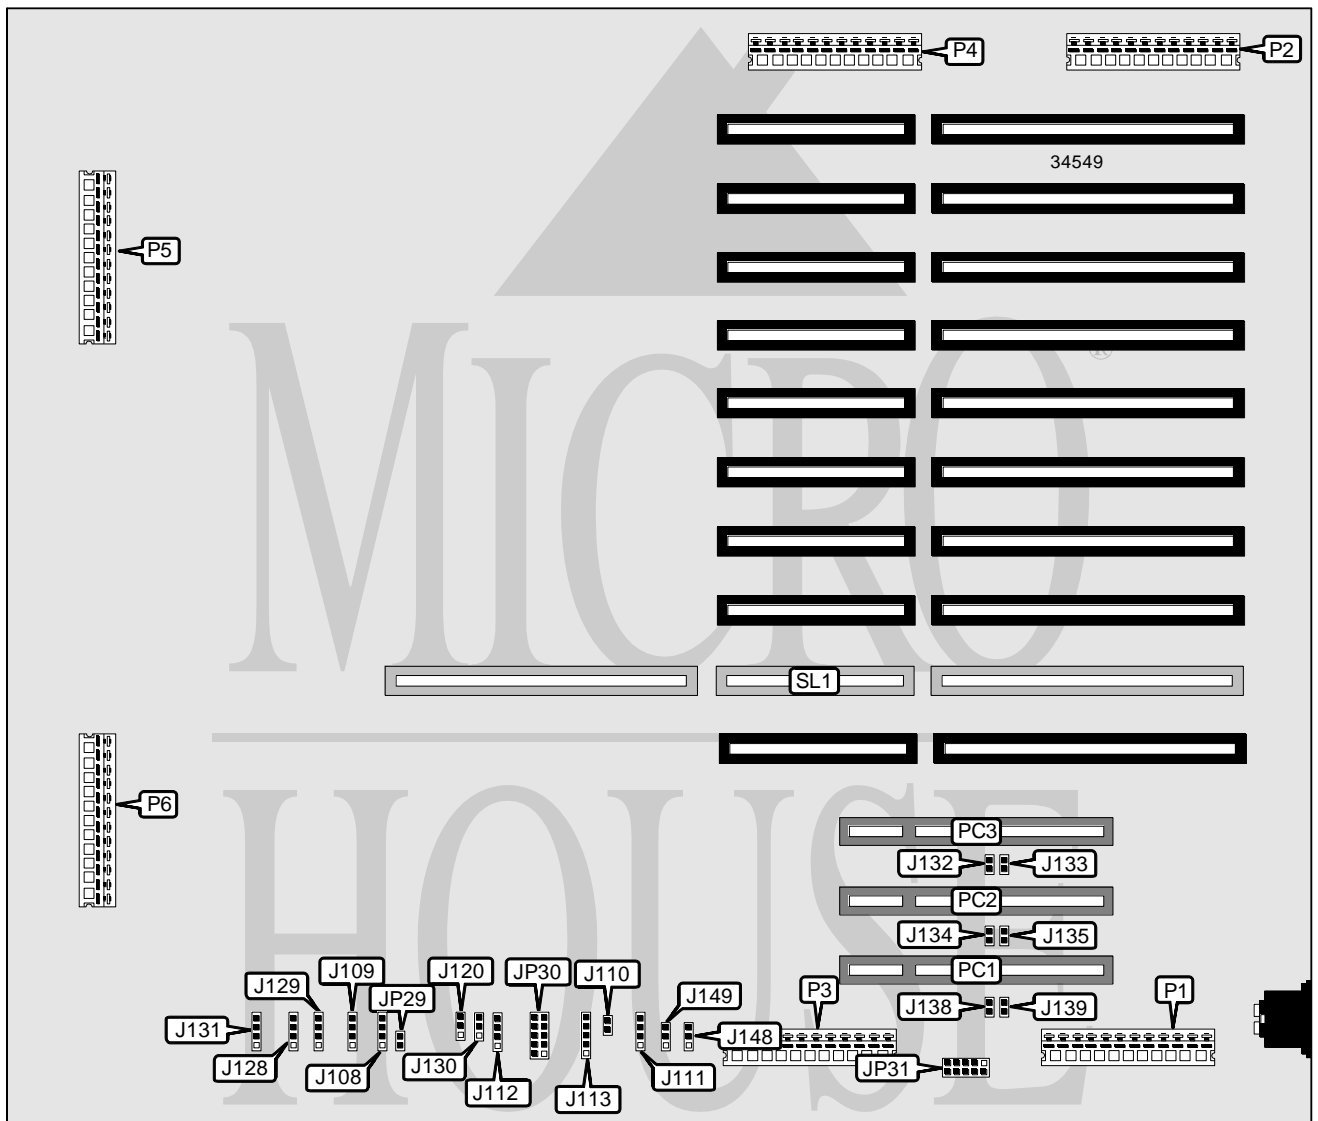

Continued on next page. . .

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface LED	J108	Front panel connector	JP30
Speaker	J109	PS/2 mouse interface	JP31
Turbo LED	J110	5v/12v power	P1
Reset switch	J111/pins 1 & 2	5v auxiliary power	P2
Turbo LED	J111/pins 3 & 4	3v power	P3
External battery	J112	3v auxiliary power	P4
Power LED & keylock	J113	3v auxiliary power	P5
IR connector	J120	5v/12v auxiliary power	P6
IR connector	J130	32-bit PCI slots	PC1 – PC3
IDE interface LED	JP29	CPU slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J128	Closed
í Factory configured - do not alter	J129	Closed
í Factory configured - do not alter	J131	Closed
í Factory configured - do not alter	J148	Closed
í Factory configured - do not alter	J149	Closed

CPU TYPE SELECTION						
Board installed	J132	J133	J134	J135	J138	J139
80486	Closed	Open	Closed	Open	Closed	Open
Pentium	Open	Closed	Open	Closed	Open	Closed