


CSS LABORATORIES, INC.  
 P B - 1 0 8 0 4

<b>Processor</b>	Pentium
<b>Processor Speed</b>	Unidentified
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	None
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	355mm x 304mm
<b>I/O Options</b>	32-bit PCI slots (4), CPU slot, PS/2 mouse interface, IR connector
<b>NPU Options</b>	None

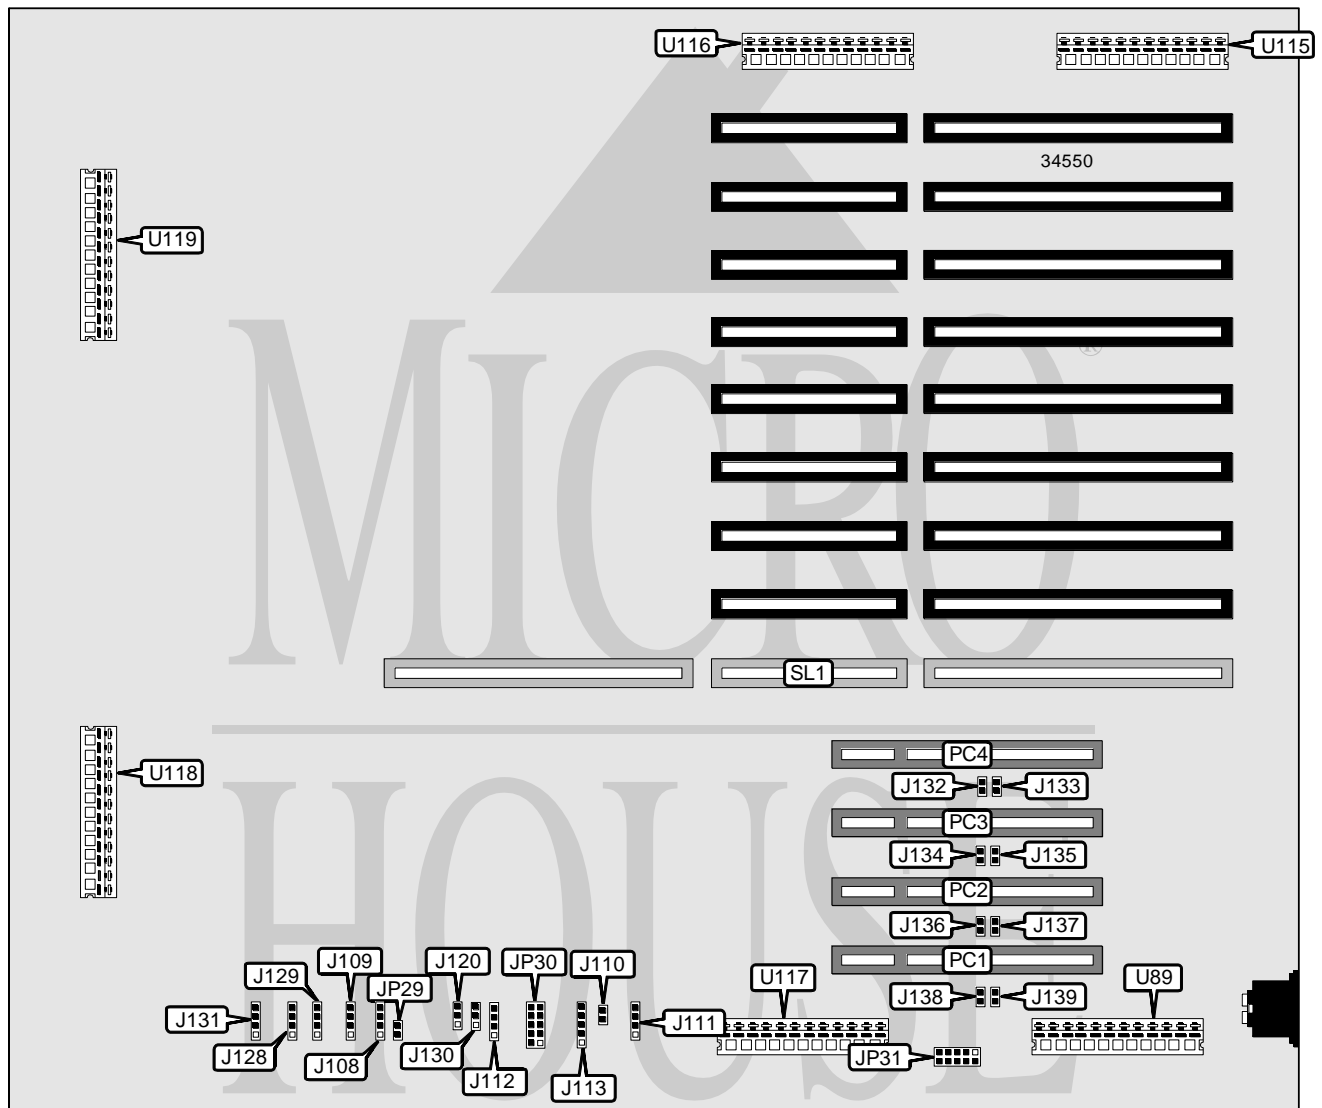

Continued on next page. . .

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface LED	J108	PS/2 mouse interface	JP31
Speaker	J109	32-bit PCI slots	PC1 – PC4
Turbo LED	J110	CPU slot	SL1
Reset switch	J111/pins 1 & 2	5v power	U89
Turbo LED	J111/pins 3 & 4	5v auxiliary power	U115
External battery	J112	3.3v auxiliary power	U116
Power LED & keylock	J113	3.3v power	U117
IR connector	J120	5v auxiliary power	U118
IDE interface LED	JP29	3.3v auxiliary power	U119
Front panel connector	JP30		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J128	Unidentified
í Factory configured - do not alter	J129	Unidentified
í Factory configured - do not alter	J130	Unidentified
í Factory configured - do not alter	J131	Unidentified

CPU TYPE SELECTION				
Board installed	J132	J133	J134	J135
Non Pentium	Closed	Open	Closed	Open
Pentium	Open	Closed	Open	Closed

CPU TYPE SELECTION (CON'T)				
Board installed	J136	J137	J138	J139
Non Pentium	Closed	Open	Closed	Open
Pentium	Open	Closed	Open	Closed