


CSS LABORATORIES, INC.

P B - 1 0 6 0 6

Processor	Pentium
Processor Speed	Unidentified
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	None
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	355mm x 304mm
I/O Options	32-bit PCI slots (6), CPU slot, PS/2 mouse interface, IR connector
NPU Options	None

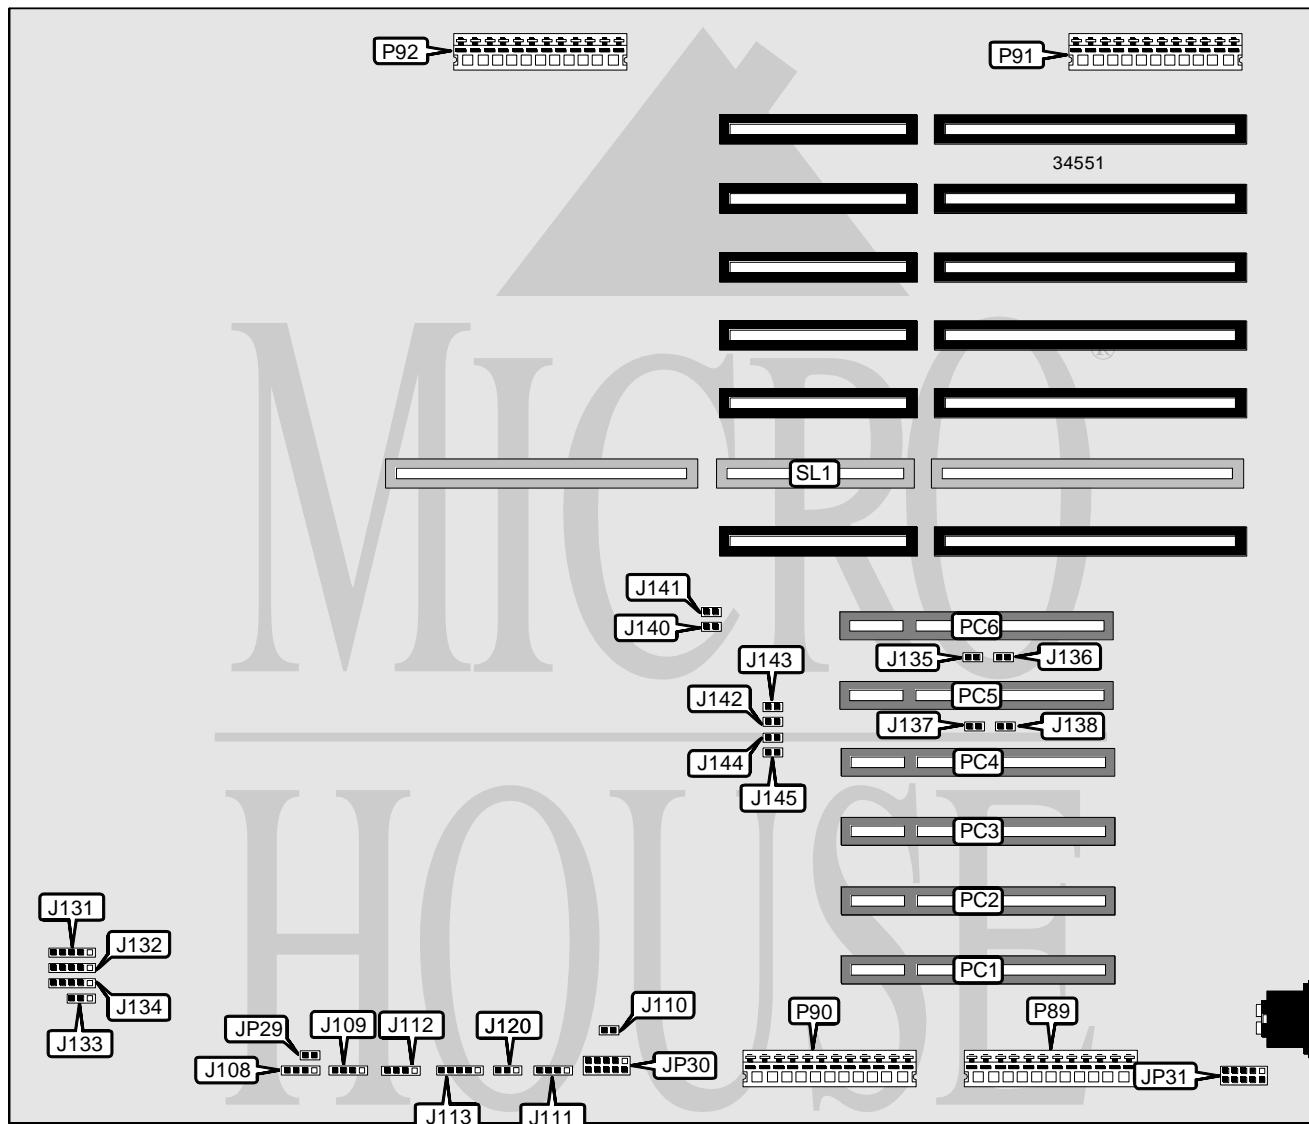

Continued on next page...

CSS LABORATORIES, INC.

P B - 1 0 6 0 6

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface LED	J108	Front panel connector	JP30
Speaker	J109	PS/2 mouse interface	JP31
Turbo LED	J110	5v power	P89
Reset switch	J111/pins 1 & 2	3.3v power	P90
Turbo LED	J111/pins 3 & 4	5v auxiliary power	P91
External battery	J112	3.3v auxiliary power	P92
Power LED & keylock	J113	32-bit PCI slots	PC1 – PC6
IR connector	J120	CPU slot	SL1
IDE interface LED	JP29		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured - do not alter	J131	Unidentified	
í Factory configured - do not alter	J132	Unidentified	
í Factory configured - do not alter	J133	Unidentified	
í Factory configured - do not alter	J134	Unidentified	
í Factory configured - do not alter	J142	Unidentified	
í Factory configured - do not alter	J143	Unidentified	
í Factory configured - do not alter	J144	Unidentified	
í Factory configured - do not alter	J145	Unidentified	

CPU TYPE SELECTION						
Board installed	J135	J136	J137	J138	J140	J141
Non Pentium	Closed	Open	Closed	Open	Closed	Open
Pentium	Open	Closed	Open	Closed	Open	Closed