


COMPAQ COMPUTER CORPORATION

PROLIANT 6000

Device Type	Mainboard
Processor	Pentium Pro
Processor Speed	200MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	4096MB (EDO supported)
Maximum Video Memory	Unidentified
Cache	512KB (located on Pentium Pro CPU)
BIOS	Unidentified
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (9), riser slot, VRM connectors (4)
NPU Options	None

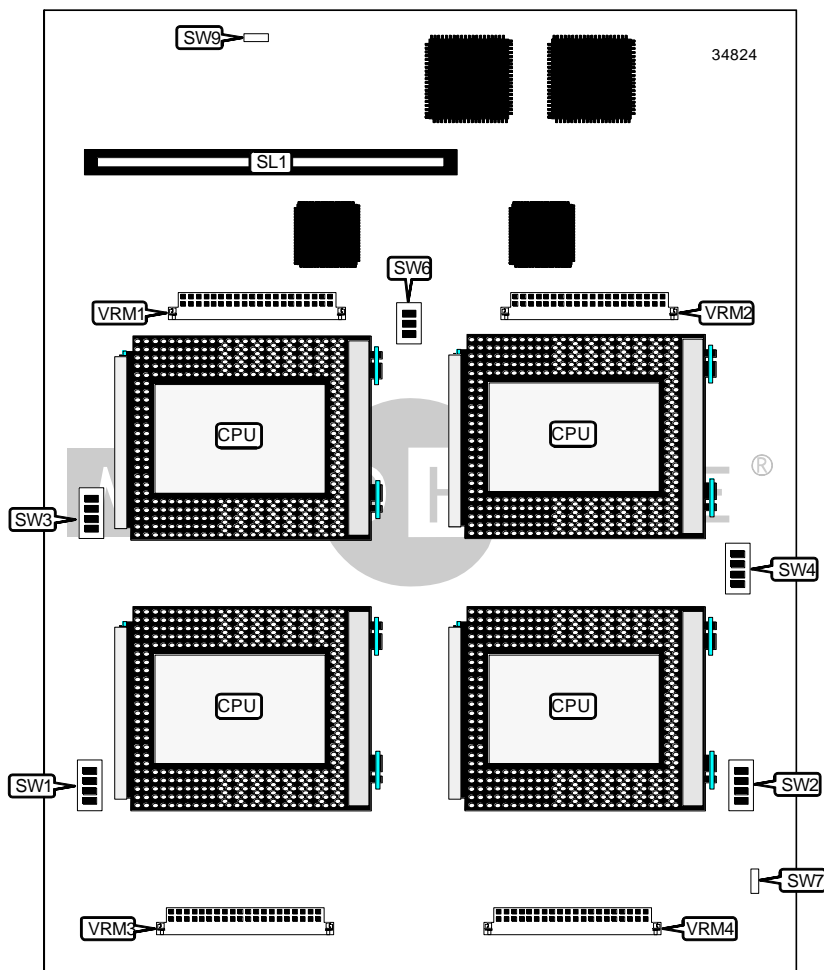

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
 PROLIANT 6000

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
VRM connectors	VRM1 – VRM4	Riser slot	SL1
Note: The types of all other connectors are unidentified.			

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	SW7	Unidentified
í Factory configured - do not alter	SW9	Unidentified

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
64MB	(4) 2M x 64	None	None	None
128MB	(4) 2M x 64	(4) 2M x 64	None	None
128MB	(4) 4M x 64	None	None	None
192MB	(4) 2M x 64	(4) 2M x 64	(4) 2M x 64	None
256MB	(4) 2M x 64	(4) 2M x 64	(4) 2M x 64	(4) 2M x 64
256MB	(4) 4M x 64	(4) 4M x 64	None	None
256MB	(4) 8M x 64	None	None	None
384MB	(4) 4M x 64	(4) 4M x 64	(4) 4M x 64	None
512MB	(4) 4M x 64	(4) 4M x 64	(4) 4M x 64	(4) 4M x 64
512MB	(4) 8M x 64	(4) 8M x 64	None	None
768MB	(4) 8M x 64	(4) 8M x 64	(4) 8M x 64	None
1024MB	(4) 8M x 64	(4) 8M x 64	(4) 8M x 64	(4) 8M x 64
1024MB	(4) 32M x 64	None	None	None
2048MB	(4) 32M x 64	(4) 32M x 64	None	None
3072MB	(4) 32M x 64	(4) 32M x 64	(4) 32M x 64	None
4096MB	(4) 32M x 64	(4) 32M x 64	(4) 32M x 64	(4) 32M x 64
Note: Board accepts EDO memory.				

CACHE CONFIGURATION
Note: 512KB cache is located on the Pentium Pro CPU.

CPU BUS CLOCK FREQUENCY SELECTION					
CPU speed	Clock speed	Multiplier	SW6/1	SW6/2	SW6/3
200MHz	66MHz	3x	Off	On	On

CPU SPEED SELECTION						
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4
200MHz	66MHz	3x	On	On	Off	On

Continued on next page...


COMPAQ COMPUTER CORPORATION
 PROLIANT 6000

... continued from previous page

CPU SPEED SELECTION (CON'T)						
CPU speed	Clock speed	Multiplier	SW2/1	SW2/2	SW2/3	SW2/4
200MHz	66MHz	3x	On	On	Off	On

CPU SPEED SELECTION (CON'T)						
CPU speed	Clock speed	Multiplier	SW3/1	SW3/2	SW3/3	SW3/4
200MHz	66MHz	3x	On	On	Off	On

CPU SPEED SELECTION (CON'T)						
CPU speed	Clock speed	Multiplier	SW4/1	SW4/2	SW4/3	SW4/4
200MHz	66MHz	3x	On	On	Off	On

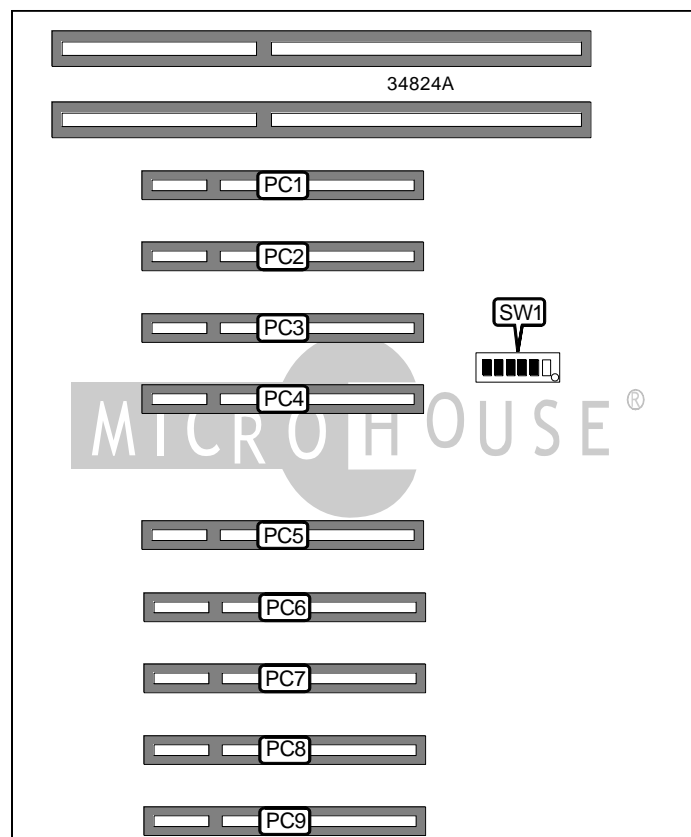

EXPANSION BOARD

Continued on next page...

COMPAQ COMPUTER CORPORATION
 PROLIANT 6000

... continued from previous page

CONNECTIONS	
Purpose	Location
32-bit PCI slots	PC1 – PC9
Note: The types of all other connectors are unidentified.	

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í On board video enabled	SW1/1	Off
On board video disabled	SW1/1	On
í Factory configured - do not alter	SW1/2	Off
í System setup as a tower configuration	SW1/3	Off
System setup as a rack configuration	SW1/3	On
í Boot from floppy enabled	SW1/4	Off
Boot from floppy disabled	SW1/4	On
í Password normal operation	SW1/5	Off
Password clear	SW1/5	On
í CMOS memory normal operation	SW1/6	Off
CMOS memory clear	SW1/6	On