


DIAMOND FLOWER, INC. G486VPA (REV. A+)

Device Type	Mainboard
Processor	CX486DX/CX486DX2/SGS\THOMPSON486DX/SGS\THOMPSON486DX2UMCU55 D/AM486DX2/AM486DX4/80486WB/80486SX/80486DX/ 80486DX2/80486DX4/80486DX4ODP/P24T
Processor Speed	25/33/40/50(internal)/50/63(internal)/66(internal)/80(internal)/ 83(internal)/100(internal)MHz
Chip Set	VIA
Video Chip Set	None
Maximum Onboard Memory	128MB
Maximum Video Memory	None
Cache	128/256/512/1024KB
BIOS	Award
Dimensions	280mm x 220mm
I/O Options	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse interface, serial ports (2)
NPU Options	None

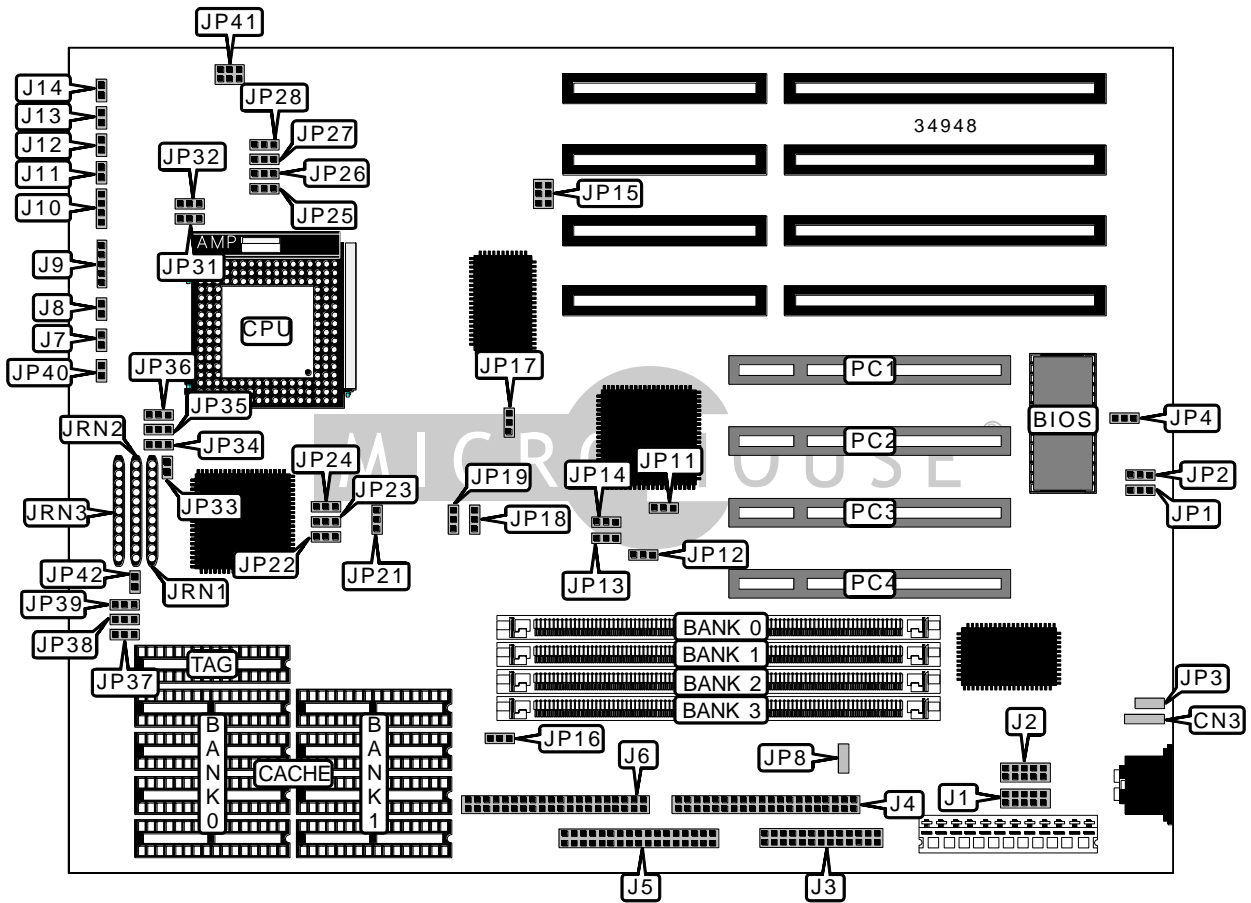

Continued on next page . . .

DIAMOND FLOWER, INC.
G486VPA (REV. A+)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse interface	CN3	Power LED & keylock	J9
Serial port 1	J1	Speaker	J10
Serial port 2	J2	Reset switch	J11
Parallel port	J3	Green PC connector	J12
IDE interface 2	J4	Turbo LED	J13
Floppy drive interface	J5	Green PC LED	J14
IDE interface 1	J6	External battery	JP3
IDE interface LED 1	J7	Chassis fan power	JP40
IDE interface LED 2	J8	32-bit PCI slots	PC1 - PC4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Battery type select external	JP1	Pins 1 & 2 closed
Battery type select internal	JP1	Pins 2 & 3 closed
í CMOS memory normal operation	JP2	Pins 1 & 2 closed
CMOS memory clear	JP2	Pins 2 & 3 closed
í Flash BIOS voltage select 12v	JP4	Pins 1 & 2 closed
Flash BIOS voltage select 5v	JP4	Pins 2 & 3 closed
í Factory configured - do not alter	JP8	Open
í Factory configured - do not alter	JP12	Pins 1 & 2 closed
í PS/2 mouse disabled	JP16	Pins 2 & 3 closed
PS/2 mouse enabled	JP16	Pins 1 & 2 closed
í Factory configured - do not alter	JP17	Pins 1 & 2 closed
í Factory configured - do not alter	JP20	Pins 1 & 2 closed
í Factory configured - do not alter	JP25	Pins 1 & 2 closed
í Factory configured - do not alter	JP27	Open
í Factory configured - do not alter	JP28	Pins 1 & 2 closed

SIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 36	None	None	None
2MB	(1) 512K x 36	None	None	None
2MB	(1) 256K x 36	(1) 256K x 36	None	None
3MB	(1) 512K x 36	(1) 256K x 36	None	None
3MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	None
4MB	(1) 1M x 36	None	None	None
4MB	(1) 512K x 36	(1) 256K x 36	(1) 256K x 36	None

Continued on next page...

DIAMOND FLOWER, INC.
G486VPA (REV. A+)

... continued from previous page

SIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(1) 512K x 36	(1) 512K x 36	None	None
4MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
5MB	(1) 1M x 36	(1) 256K x 36	None	None
5MB	(1) 512K x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
6MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	None
6MB	(1) 1M x 36	(1) 512K x 36	None	None
6MB	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36	None
8MB	(1) 2M x 36	None	None	None
8MB	(1) 1M x 36	(1) 512K x 36	(1) 512K x 36	None
8MB	(1) 1M x 36	(1) 1M x 36	None	None
8MB	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
9MB	(1) 2M x 36	(1) 256K x 36	None	None
10MB	(1) 2M x 36	(1) 256K x 36	(1) 256K x 36	None
10MB	(1) 2M x 36	(1) 512K x 36	None	None
10MB	(1) 1M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
11MB	(1) 2M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
12MB	(1) 2M x 36	(1) 512K x 36	(1) 512K x 36	None
12MB	(1) 2M x 36	(1) 1M x 36	None	None
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	None
16MB	(1) 4M x 36	None	None	None
16MB	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36	None
16MB	(1) 2M x 36	(1) 2M x 36	None	None
16MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
17MB	(1) 4M x 36	(1) 256K x 36	None	None
18MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	None
18MB	(1) 4M x 36	(1) 512K x 36	None	None
19MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
20MB	(1) 4M x 36	(1) 512K x 36	(1) 512K x 36	None
20MB	(1) 4M x 36	(1) 1M x 36	None	None
20MB	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
22MB	(1) 4M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
24MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	None
24MB	(1) 4M x 36	(1) 2M x 36	None	None
24MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	None
28MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
32MB	(1) 8M x 36	None	None	None
32MB	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36	None

Continued on next page. . .

DIAMOND FLOWER, INC.
G486VPA (REV. A+)

... continued from previous page

SIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
32MB	(1) 4M x 36	(1) 4M x 36	None	None
32MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
33MB	(1) 8M x 36	(1) 256K x 36	None	None
34MB	(1) 8M x 36	(1) 256K x 36	(1) 256K x 36	None
34MB	(1) 8M x 36	(1) 512K x 36	None	None
35MB	(1) 8M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
36MB	(1) 8M x 36	(1) 512K x 36	(1) 512K x 36	None
36MB	(1) 8M x 36	(1) 1M x 36	None	None
38MB	(1) 8M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
40MB	(1) 8M x 36	(1) 1M x 36	(1) 1M x 36	None
40MB	(1) 8M x 36	(1) 2M x 36	None	None
40MB	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
44MB	(1) 8M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
48MB	(1) 8M x 36	(1) 2M x 36	(1) 2M x 36	None
48MB	(1) 8M x 36	(1) 4M x 36	None	None
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	None
56MB	(1) 8M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
64MB	(1) 8M x 36	(1) 4M x 36	(1) 4M x 36	None
64MB	(1) 8M x 36	(1) 8M x 36	None	None
64MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
80MB	(1) 8M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
96MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	None
100MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	(1) 1M x 36
104MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	(1) 2M x 36
112MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	(1) 4M x 36
128MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
128KB	(4) 32K x 8	None	(1) 8K x 8
256KB (A)	(4) 64K x 8	None	(1) 32K x 8
256KB (B)	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8
512KB (A)	(4) 128K x 8	None	(1) 32K x 8
512KB (B)	(4) 64K x 8	(4) 64K x 8	(1) 32K x 8
1MB	(4) 128K x 8	(4) 128K x 8	(1) 64K/128K x 8

Continued on next page...

DIAMOND FLOWER, INC.
G486VPA (REV. A+)

... continued from previous page

CACHE JUMPER CONFIGURATION						
Size	JP22	JP23	JP24	JP37	JP38	JP39
128KB	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2
256KB (A)	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2	2 & 3
256KB (B)	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	2 & 3
512KB (A)	2 & 3	1 & 2	1 & 2	1 & 2	2 & 3	2 & 3
512KB (B)	1 & 2	1 & 2	1 & 2	1 & 2	2 & 3	2 & 3
1MB	1 & 2	1 & 2	1 & 2	2 & 3	2 & 3	2 & 3

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION			
Speed	JP18	JP19	JP21
25MHz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
33MHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
40MHz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
50iMHz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
50MHz	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
63iMHz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
66iMHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
80iMHz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
83iMHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
100iMHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed

CPU TYPE SELECTION (CYRIX)					
Type	JP14	JP26	JP33	JP34	JP35
486DX	1 & 2	1 & 2	Open	1 & 2	1 & 2
486DX2	1 & 2	1 & 2	Open	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU TYPE SELECTION (CYRIX, CON'T)					
Type	JP36	JP42	JRN1	JRN2	JRN3
486DX	1 & 2	Open	Not installed	Not installed	Installed
486DX2	1 & 2	Open	Not installed	Not installed	Installed

Note: Pins designated should be in the closed position.

CPU TYPE SELECTION (SGS/THOMPSON)					
Type	JP14	JP26	JP33	JP34	JP35
486DX	1 & 2	1 & 2	Open	1 & 2	1 & 2
486DX2	1 & 2	1 & 2	Open	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

Continued on next page...

DIAMOND FLOWER, INC.
G486VPA (REV. A+)

... continued from previous page

CPU TYPE SELECTION (SGS/THOMPSON, CON'T)					
Type	JP36	JP42	JRN1	JRN2	JRN3
486DX	1 & 2	Open	Not installed	Not installed	Installed
486DX2	1 & 2	Open	Not installed	Not installed	Installed

Note: Pins designated should be in the closed position.

CPU TYPE SELECTION (UMC)					
Type	JP14	JP26	JP33	JP34	JP35
U5S	1 & 2	Open	Open	2 & 3	Open
U5SLV	1 & 2	Open	Open	2 & 3	Open
U5SD	1 & 2	Open	Open	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU TYPE SELECTION (UMC, CON'T)					
Type	JP36	JP42	JRN1	JRN2	JRN3
U5S	2 & 3	Open	Not installed	Installed	Not installed
U5SLV	2 & 3	Open	Not installed	Installed	Not installed
U5SD	1 & 2	Open	Not installed	Installed	Not installed

Note: Pins designated should be in the closed position.

CPU TYPE SELECTION (AMD)					
Type	JP14	JP26	JP33	JP34	JP35
486DX2 (NV8T)	1 & 2	2 & 3	Closed	1 & 2	1 & 2
486DX2 (SV8B)	1 & 2	2 & 3	Open	1 & 2	1 & 2
486DX4	2 & 3	2 & 3	Open	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU TYPE SELECTION (AMD, CON'T)					
Type	JP36	JP42	JRN1	JRN2	JRN3
486DX2 (NV8T)	1 & 2	Open	Installed	Not installed	Not installed
486DX2 (SV8B)	1 & 2	Closed	Installed	Not installed	Not installed
486DX4	1 & 2	Open	Installed	Not installed	Not installed

Note: Pins designated should be in the closed position.

Continued on next page...

DIAMOND FLOWER, INC.
G486VPA (REV. A+)

... continued from previous page

CPU TYPE SELECTION (INTEL)					
Type	JP14	JP26	JP33	JP34	JP35
80486WB	2 & 3	2 & 3	Open	1 & 2	1 & 2
80486SX	1 & 2	Open	Open	2 & 3	Open
80486DX	1 & 2	Open	Open	1 & 2	1 & 2
80486DX2	1 & 2	Open	Open	1 & 2	1 & 2
80486DX4	1 & 2	2 & 3	Open	1 & 2	1 & 2
486DX4 ODP	1 & 2	2 & 3	Open	1 & 2	2 & 3
P24T	1 & 2	2 & 3	Open	1 & 2	2 & 3

Note: Pins designated should be in the closed position.

CPU TYPE SELECTION (INTEL, CON'T)					
Type	JP36	JP42	JRN1	JRN2	JRN3
80486WB	1 & 2	Open	Installed	Not installed	Not installed
80486SX	2 & 3	Open	Installed	Not installed	Not installed
80486DX	1 & 2	Open	Installed	Not installed	Not installed
80486DX2	1 & 2	Open	Installed	Not installed	Not installed
80486DX4	1 & 2	Open	Installed	Not installed	Not installed
486DX4 ODP	1 & 2	Open	Installed	Not installed	Not installed
P24T	1 & 2	Open	Installed	Not installed	Not installed

Note: Pins designated should be in the closed position.

CPU VOLTAGE SELECTION			
Voltage	JP31	JP32	JP41
3.45v	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
3.6v	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 3 & 4 closed
4v	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 5 & 6 closed
5v	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed

DMA CHANNEL SELECTION	
Channel	JP15
None	Open
1	Pins 1 & 3, 2 & 4 closed
3	Pins 3 & 5, 4 & 6 closed

PCI CLOCK SPEED SELECTION		
Speed	JP11	JP13
<= 33MHz	Pins 1 & 2 closed	Pins 1 & 2 closed
>33 MHz	Pins 2 & 3 closed	Pins 2 & 3 closed