


ACER INC.
ASPIRE 5000E, V65LA

Device Type	Mainboard
Processor	Pentium II
Processor Speed	233/266/300/333MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	384MB (SDRAM supported)
Maximum Video Memory	Unidentified
Cache	256/512KB (located on Pentium II CPU)
BIOS	Acer
Dimensions	305mm x 244mm
I/O Options	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot, IR connector, USB connectors (3)
NPU Options	None

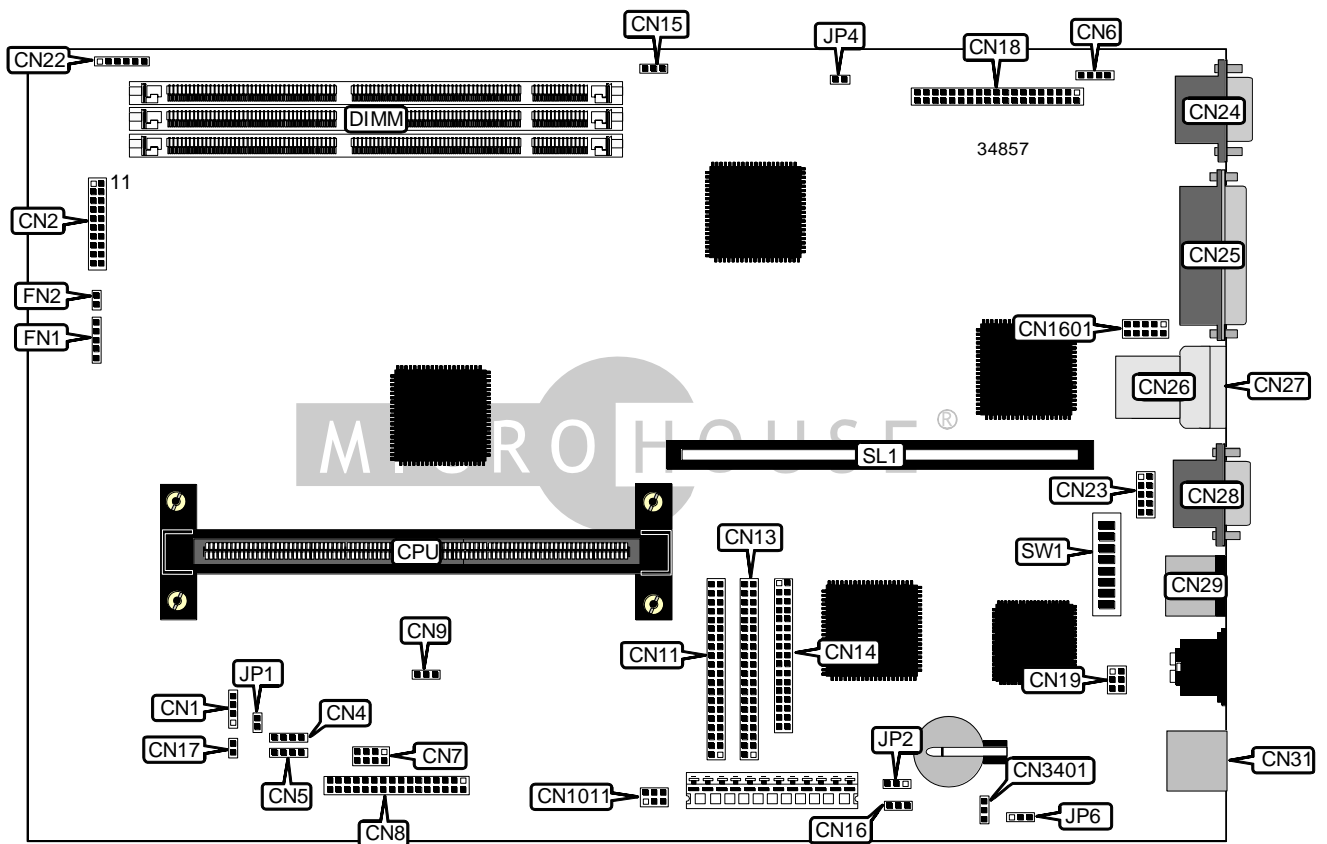

Continued on next page...

ACER INC.
ASPIRE 5000E, V65LA

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface LED	CN1	Parallel port	CN25
Front panel connector	CN2	USB connector 1 (external)	CN26
IDE interface 1	CN11	USB connector 2 (external)	CN27
IDE interface 2	CN13	Serial port 1	CN28
Floppy drive interface	CN14	PS/2 mouse port	CN29
Wake on modem connector	CN15	Appears off connector	CN1011
Software shutdown connector	CN16	Serial port 2	CN1601
Soft off power supply	CN17	Wake on LAN connector	CN3401
ATI AMC connector	CN18	Chassis fan power	FN1
Wake on LAN connector	CN19	Chassis fan power	FN2
USB connector (internal)	CN23	Riser slot	SL1
VGA port	CN24		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	CN4	Unidentified
í Factory configured - do not alter	CN5	Unidentified
í Factory configured - do not alter	CN6	Unidentified
í Factory configured - do not alter	CN7	Unidentified
í Factory configured - do not alter	CN8	Unidentified
í Factory configured - do not alter	CN9	Unidentified
í Factory configured - do not alter	CN22	Unidentified
í Factory configured - do not alter	CN31	Unidentified
í Factory configured - do not alter	JP1	Unidentified
í Factory configured - do not alter	JP2	Unidentified
í Factory configured - do not alter	JP4	Unidentified
í Factory configured - do not alter	JP6	Unidentified
í Password disabled	SW1/2	On
Password enabled	SW1/2	Off
í Factory configured - do not alter (Acer BIOS)	SW1/3	On
í Factory configured - do not alter	SW1/4	Unidentified

DIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
16MB	(1) 2M x 64	None	None
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None
48MB	(1) 4M x 64	(1) 2M x 64	None

Continued on next page...

ACER INC.
ASPIRE 5000E, V65LA

... continued from previous page

DIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

Note: Board accepts SDRAM memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

VIDEO MEMORY CONFIGURATION

Note: The size & location of the video memory is unidentified.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	SW1/1	SW1/5	SW1/6	SW1/7	SW1/8
233MHz	66MHz	3.5x	Off	On	Off	Off	On
266MHz	66MHz	4x	Off	Off	On	On	On
300MHz	66MHz	4.5x	Off	Off	On	Off	On
333MHz	66MHz	5x	Off	Off	Off	On	On