
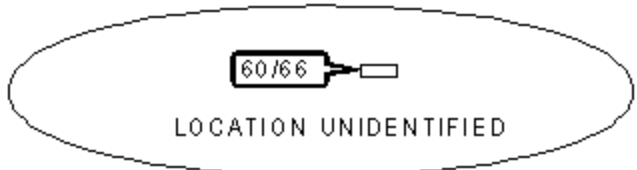


IBM CORPORATION

PC 750 TYPE 6885, 6886

Processor	Pentium
Processor Speed	75/90/100/120/133MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	192MB
Maximum Video Memory	Unidentified
Cache	256/1024KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot, CD-ROM audio interface, audio line in connector, audio line out connector

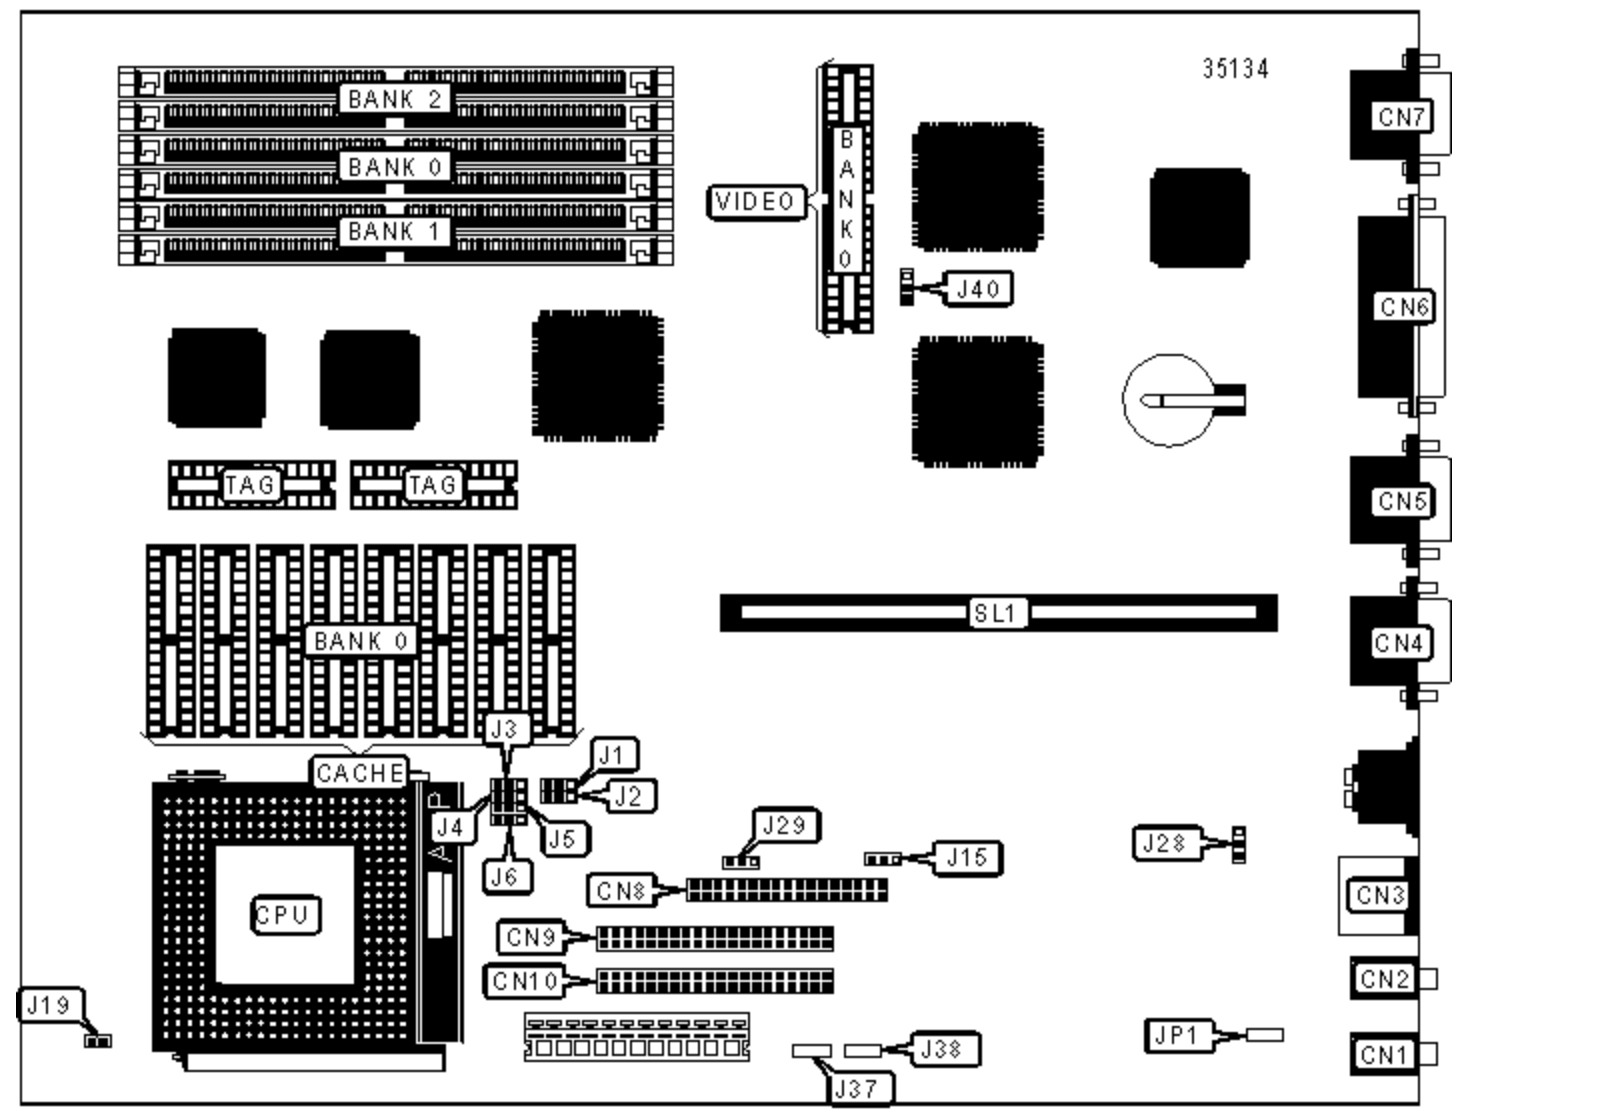

Purpose	Location	Purpose	Location
Audio line out connector	CN1	Floppy drive interface	CN8
Audio line in connector	CN2	IDE interface	CN9
PS/2 mouse port	CN3	IDE interface	CN10
Serial port	CN4	CD-ROM audio interface	JP1
Serial port	CN5	On/off switch connector	J37
Parallel port	CN6	On/off switch power supply connector	J38
VGA port	CN7	Riser slot	SL1

USER CONFIGURABLE SETTINGS


Function		Label	Position
»	Factory configured - do not alter	60/66	Unidentified
»	Factory configured - do not alter	J1	Unidentified
»	Factory configured - do not alter	J2	Unidentified
»	Factory configured - do not alter	J3	Unidentified
»	Factory configured - do not alter	J4	Unidentified
»	Factory configured - do not alter	J5	Unidentified
»	Factory configured - do not alter	J6	Unidentified
»	Modem answers on ring	J15	Pins 2 & 3 closed
	Modem does not answer on ring	J15	Pins 1 & 2 closed
»	PS/2 mouse enabled	J28	Pins 1 & 2 closed
	PS/2 mouse disabled	J28	Pins 2 & 3 closed
»	Floppy drive write protect disabled	J29	Pins 1 & 2 closed
	Floppy drive write protect enabled	J29	Pins 2 & 3 closed
»	Password normal operation	J40	Pins 1 & 2 closed
	Password clear	J40	Pins 2 & 3 closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36	None
32MB	(2) 4M x 36	None	None
40MB	(2) 2M x 36	(2) 2M x 36	(2) 1M x 36
40MB	(2) 4M x 36	(2) 1M x 36	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
48MB	(2) 4M x 36	(2) 2M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36	None
64MB	(2) 8M x 36	None	None
72MB	(2) 4M x 36	(2) 4M x 36	(2) 1M x 36
72MB	(2) 8M x 36	(2) 1M x 36	None
80MB	(2) 4M x 36	(2) 4M x 36	(2) 2M x 36
80MB	(2) 8M x 36	(2) 2M x 36	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
96MB	(2) 8M x 36	(2) 4M x 36	None
128MB	(2) 8M x 36	(2) 8M x 36	None
136MB	(2) 8M x 36	(2) 8M x 36	(2) 1M x 36
144MB	(2) 8M x 36	(2) 8M x 36	(2) 2M x 36
160MB	(2) 8M x 36	(2) 8M x 36	(2) 4M x 36
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36

CPU MULTIPLIER SELECTION

Multiplier	J19
1.5x	Closed
2x	Open

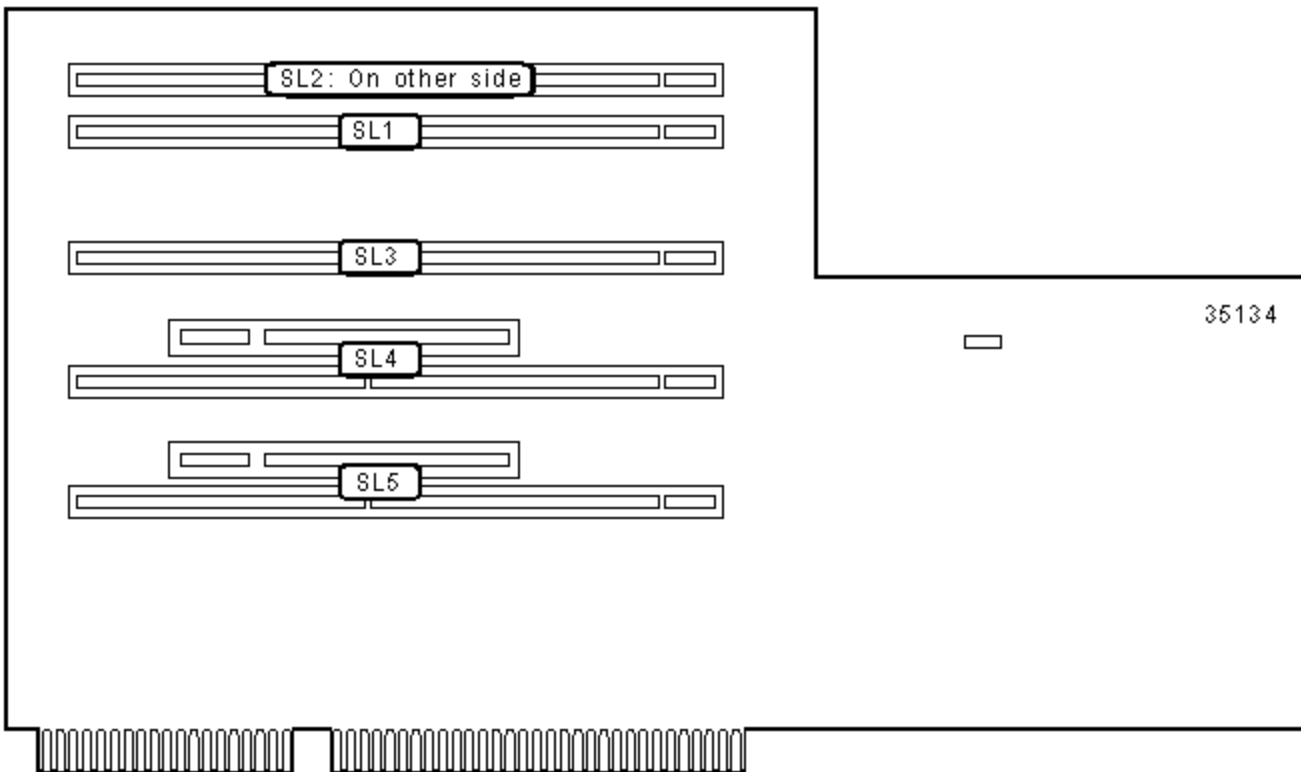

PC 750 (type 6886) Riser Card

CONNECTIONS

Purpose	Location	Purpose	Location
Micro Channel slot	SL1	Shared PCI/Micro Channel slot	SL4
Micro Channel slot	SL2	Shared PCI/Micro Channel slot	SL5
Micro Channel slot	SL3		

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Factory configured - do not alter	JP1	Unidentified

