


EFA CORPORATION

P6LX-ATX

Device Type	Mainboard
Processor	Pentium II
Processor Speed	166/200/233/266/300/333MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	384MB
Maximum Video Memory	None
Cache	256/512KB (located on Pentium II CPU)
BIOS	Award
Dimensions	305mm x 220mm
I/O Options	32-bit PCI slots (3), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connector, ATX power connector, AGP slot
NPU Options	None

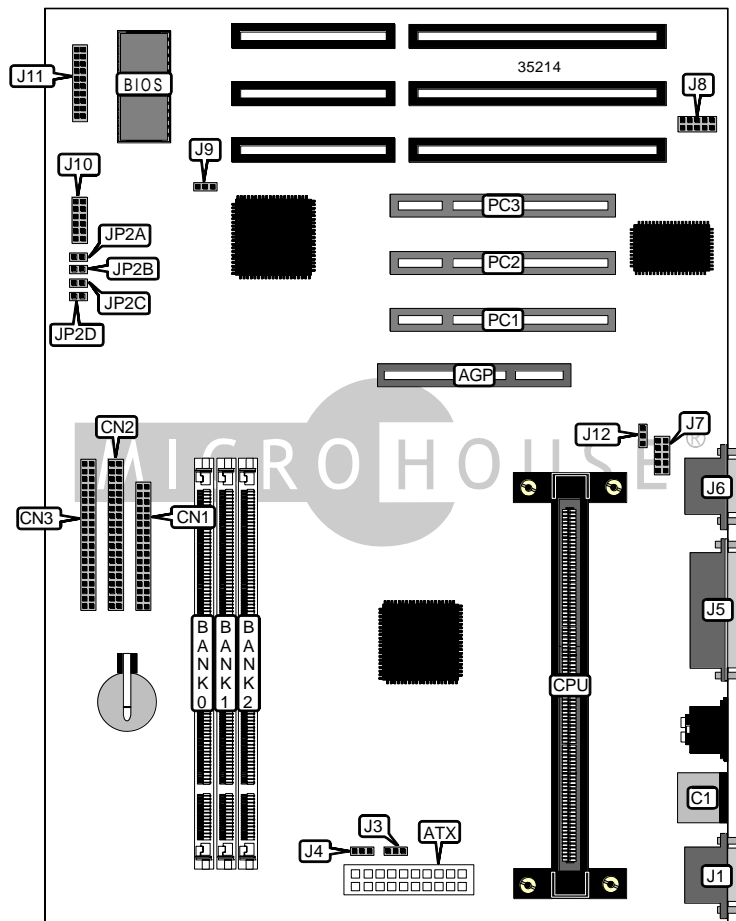

Continued on next page. . .

EFA CORPORATION
P6LX-ATX

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
AGP slot	AGP	IR connector	J7
ATX power connector	ATX	USB connector	J8
PS/2 mouse port	C1	Chassis fan power	J9
Floppy drive interface	CN1	Soft off power supply	J10/pins 8 & 10
IDE interface 1	CN2	Power LED & keylock	J11/pins 1/3/5/7/9
IDE interface 2	CN3	Speaker	J11/pins 2/4/6/8
Serial port 1	J1	Green PC connector	J11/pins 13 & 14
Power fan	J3	IDE interface LED	J11/pins 15 & 16
CPU fan power	J4	Reset switch	J11/pins 17 & 18
Parallel port	J5	LAN card boot connector	J12
Serial port 2	J6	32-bit PCI slots	PC1 – PC3

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	J10	Pins 5 & 7 closed
CMOS memory clear	J10	Pins 7 & 9 closed

DIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None

Continued on next page...

EFA CORPORATION
P6LX-ATX

... continued from previous page

DIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium II CPU.

Continued on next page...

EFA CORPORATION
P6LX-ATX

... continued from previous page

CPU SPEED SELECTION						
CPU speed	Clock speed	Multiplier	JP2A	JP2B	JP2C	JP2D
166MHz	66MHz	2.5x	Closed	Closed	Open	Closed
200MHz	66MHz	3x	Closed	Open	Closed	Closed
233MHz	66MHz	3.5x	Closed	Open	Open	Closed
266MHz	66MHz	4x	Open	Closed	Closed	Closed
300MHz	66MHz	4.5x	Open	Closed	Open	Closed
333MHz	66MHz	5x	Open	Open	Closed	Closed