


ABIT COMPUTER CORPORATION

386DX - F A 3

Processor	80386DX/CX486DLC
Processor Speed	33/40MHz
Chip Set	ALI
Max. Onboard DRAM	32MB
Cache	64/256KB
BIOS	AMI
Dimensions	240mm x 220mm
I/O Options	None
NPU Options	80387/CX87DLC/3167

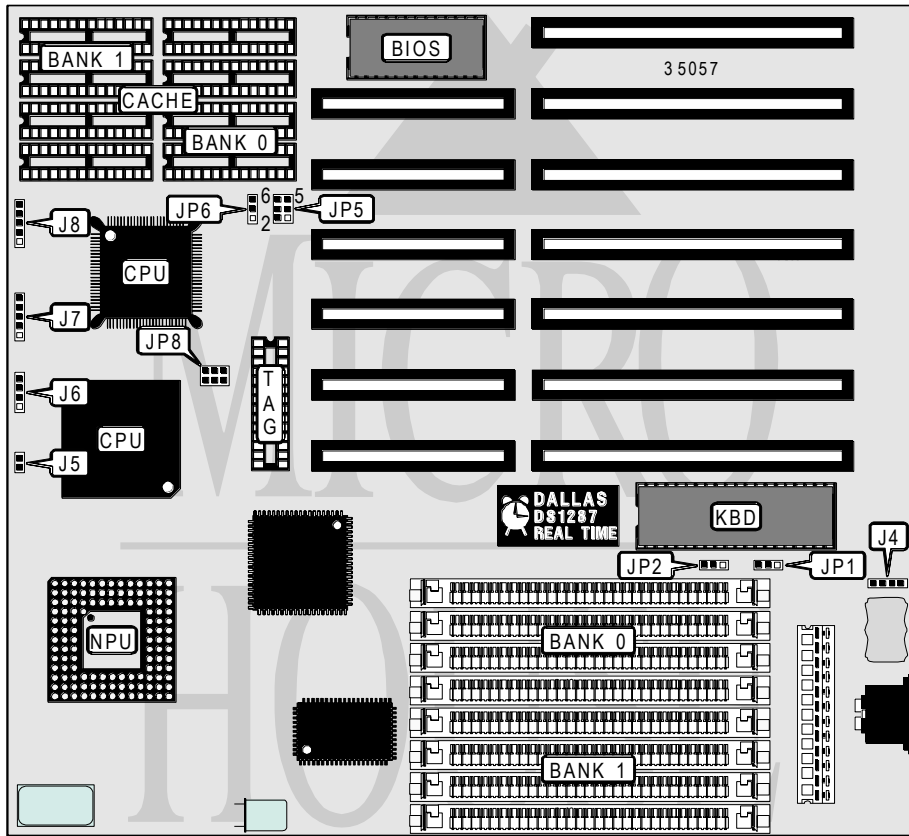

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J4	Turbo switch	J7 pins 1 & 2
Reset switch	J5	Turbo LED	J7 pins 4 & 5
Speaker	J6	Power LED & keylock	J8

Continued on next page . . .

ABIT COMPUTER CORPORATION

386DX - FA3

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	pins 2 & 3 closed
Monitor type select monochrome	JP1	pins 1 & 2 closed
í Factory configured - do not alter	JP2	pins 2 & 3 closed
í Factory configured - do not alter	JP8	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION		
Size	JP5	JP6
64KB	Open	pins 1 & 2 closed
256KB	pins 1 & 2, 3 & 4, 5 & 6 closed	pins 1 & 2 closed