


DIAMOND FLOWER, INC.  
E586-ICP

<b>Device Type</b>	Mainboard
<b>Processor</b>	Pentium
<b>Processor Speed</b>	60/66MHz
<b>Chip Set</b>	Intel
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	128MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	256/512KB
<b>BIOS</b>	Award
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit PCI slots (4), IDE interface, PS/2 mouse interface
<b>NPU Options</b>	None

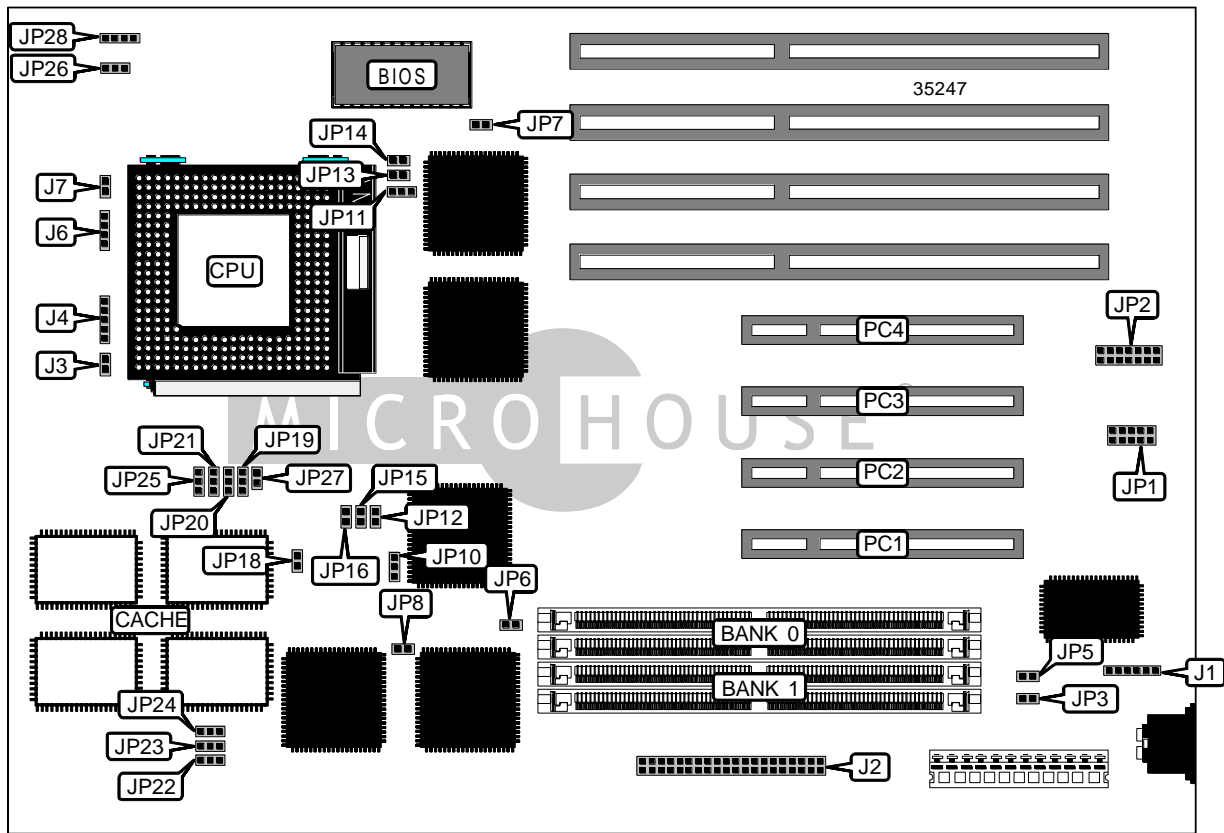

Continued on next page...

DIAMOND FLOWER, INC.  
E586-ICP

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse interface	J1	Reset switch	J7
IDE interface	J2	Legacy connector	JP2
IDE interface LED	J3	Chassis fan power	JP28
Power LED & keylock	J4	32-bit PCI slots	PC1 – PC4
Speaker	J6		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í PS/2 mouse IRQ12 enabled	JP7	Closed	
PS/2 mouse IRQ12 disabled	JP7	Open	
í Monitor type select color	JP11	Pins 1 & 2 closed	
Monitor type select monochrome	JP11	Pins 2 & 3 closed	
í Factory configured - do not alter	JP10	Pins 2 & 3 closed	
í Factory configured - do not alter	JP12	Closed	
í Password normal operation	JP13	Open	
Password clear	JP13	Closed	
í Factory configured - do not alter	JP14	Open	
í Cache type select write back	JP15	Open	
Cache type select write through	JP15	Closed	
í Factory configured - do not alter	JP16	Open	
í Factory configured - do not alter	JP19	Pins 2 & 3 closed	
í Factory configured - do not alter	JP20	Pins 2 & 3 closed	
í Factory configured - do not alter	JP21	Pins 2 & 3 closed	
í Factory configured - do not alter	JP24	Pins 2 & 3 closed	
í Factory configured - do not alter	JP25	Pins 2 & 3 closed	
í BIOS type select flash	JP26	Pins 1 & 2 closed	
BIOS type select EPROM	JP26	Pins 2 & 3 closed	
í Factory configured - do not alter	JP27	Open	

SIMM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 256K x 36	None
4MB	(2) 512K x 36	None
4MB	(2) 256K x 36	(2) 256K x 36
6MB	(2) 512K x 36	(2) 256K x 36
8MB	(2) 1M x 36	None
8MB	(2) 512K x 36	(2) 512K x 36

Continued on next page...

DIAMOND FLOWER, INC.  
E586-ICP

... continued from previous page

SIMM CONFIGURATION (CON'T)		
Size	Bank 0	Bank 1
10MB	(2) 1M x 36	(2) 256K x 36
12MB	(2) 512K x 36	(2) 1M x 36
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
18MB	(2) 2M x 36	(2) 256K x 36
20MB	(2) 512K x 36	(2) 2M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
34MB	(2) 4M x 36	(2) 256K x 36
36MB	(2) 512K x 36	(2) 4M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
66MB	(2) 8M x 36	(2) 256K x 36
68MB	(2) 512K x 36	(2) 8M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 2M x 36	(2) 8M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
256KB	(2) 32K x 32	None
512KB	(2) 32K x 32	(2) 32K x 32

CACHE JUMPER CONFIGURATION		
Size	JP22	JP23
None	Pins 1 & 2 closed	Pins 1 & 2 closed
256KB	Pins 1 & 2 closed	Pins 2 & 3 closed
512KB	Pins 2 & 3 closed	Pins 2 & 3 closed

CACHE PARITY CONFIGURATION		
Setting	JP6	JP8
í Enabled	Closed	Closed
Disabled	Open	Open

Continued on next page. . .

DIAMOND FLOWER, INC.  
E586-ICP

... continued from previous page

CPU SPEED SELECTION	
Speed	JP18
60MHz	Closed
66MHz	Open

ON BOARD IDE SELECTION		
Setting	JP3	JP5
Disabled	Closed	Open
Enabled	Open	Closed

PCI SELECTION		
INT	IRQ	JP1
A	15	Pins 1 & 2 closed
A	14	Pins 3 & 4 closed
B	11	Pins 5 & 6 closed
C	10	Pins 7 & 8 closed
D	9	Pins 9 & 10 closed