


COMPAQ COMPUTER CORPORATION

PROLIANT 5500/5500R

Device Type	Mainboard
Processor	Pentium Pro
Processor Speed	200MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	1GB (EDO supported)
Maximum Video Memory	Unidentified
Cache	256/512KB (located on Pentium Pro CPU)
BIOS	Unidentified
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (8), floppy drive interface, IDE interface, SCSI interface, Wide Ultra SCSI interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port, I20 connector
NPU Options	None

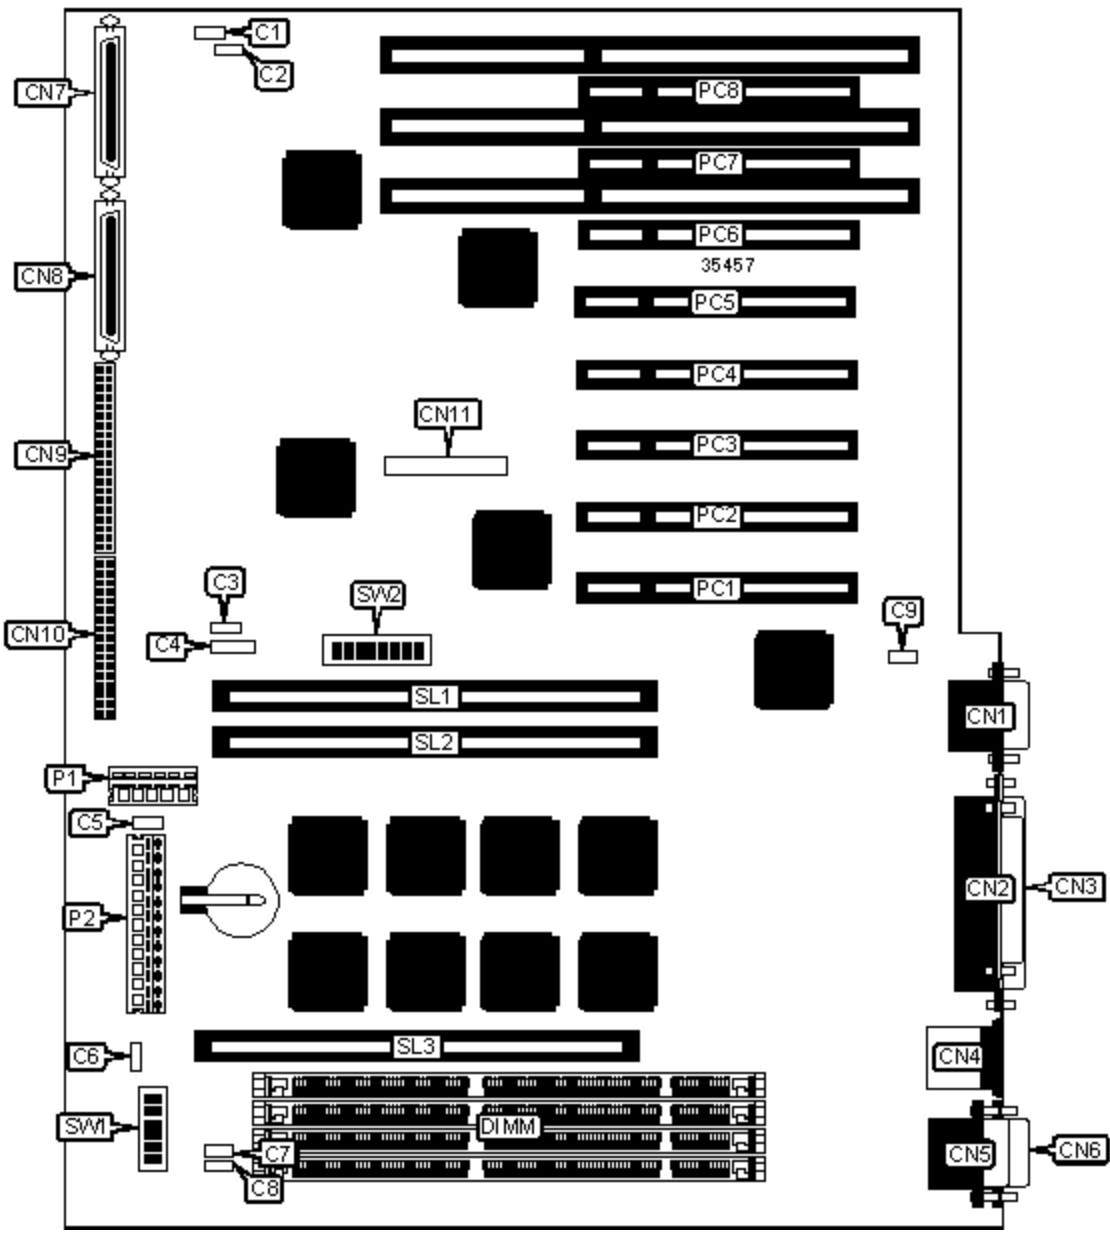

Purpose	Location	Purpose	Location
Chassis fan power	C1	Serial port 2	CN5
Chassis fan power	C2	Serial port 1	CN6
Management display connector	C3	Ultra Wide SCSI interface	CN7
Management display connector	C4	Ultra Wide SCSI interface	CN8
External battery	C5	IDE interface	CN9
Floppy power lock connector	C6	Floppy drive interface	CN10
Chassis fan power	C7	I2O connector	CN11
Chassis fan power	C8	3.3v power	P1
Chassis fan power	C9	5v power	P2
VGA port	CN1	32-bit PCI slots	PC1 – PC8
Parallel port	CN2	Memory slot	SL1
SCSI interface	CN3	CPU slot	SL2
PS/2 mouse port	CN4	CPU slot	SL3

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	On board video enabled	SW1/1	Off
	On board video disabled	SW1/1	On
»	Setup access enabled	SW1/2	Off
	Setup access disabled	SW1/2	On
»	System setup in a tower	SW1/3	Off
	System setup in a rack mount	SW1/3	On
»	Floppy drive boot enabled	SW1/4	On
	Floppy drive boot disabled	SW1/4	Off
»	Password normal operation	SW1/5	Off

	Password clear	SW1/5	On
»	NVRAM is validated, configuration not lost	SW1/6	Off
	NVRAM is invalidated, configuration is lost	SW1/6	On

DIMM CONFIGURATION

Size	Bank 0	Bank 1
64MB	(2) 4M x 64	None
128MB	(2) 8M x 64	None
192MB	(2) 8M x 64	(2) 4M x 64
256MB	(2) 16M x 64	None
256MB	(2) 8M x 64	(2) 8M x 64

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1
320MB	(2) 16M x 64	(2) 4M x 64
384MB	(2) 16M x 64	(2) 8M x 64
512MB	(2) 32M x 64	None
512MB	(2) 16M x 64	(2) 16M x 64
576MB	(2) 32M x 64	(2) 4M x 64
640MB	(2) 32M x 64	(2) 8M x 64
768MB	(2) 32M x 64	(2) 16M x 64
1024MB	(2) 32M x 64	(2) 32M x 64

Note: Board accepts EDO memory. Above configuration is for the onboard memory. The maximum memory available on the memory card is unidentified.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium Pro CPU.

VIDEO MEMORY CONFIGURATION

Note: The size and location of the video memory is unidentified.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	SW2/1	SW2/2	SW2/3	SW2/4
200MHz	66MHz	3x	On	On	On	Off

CPU SPEED SELECTION (CON'T)

CPU speed	Clock speed	Multiplier	SW2/5	SW2/6	SW2/7	SW2/8
200MHz	66MHz	3x	On	Off	Off	Off