


COMPAQ COMPUTER CORPORATION PROLIANT 3000

Device Type	Mainboard
Processor	Pentium II
Processor Speed	300MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	512MB (EDO supported)
Maximum Video Memory	Unidentified
Cache	512KB (located on Pentium II CPU)
BIOS	Unidentified
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (8), floppy drive interface, IDE interface, SCSI interface, Wide Ultra SCSI interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port, I20 connector
NPU Options	None

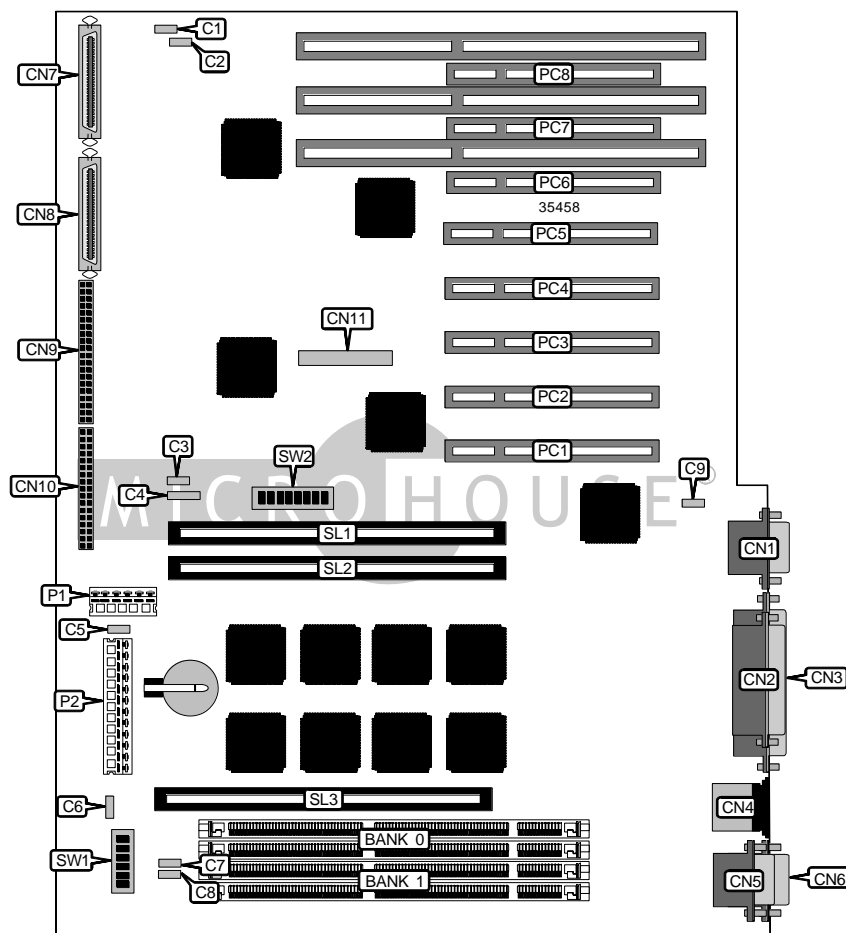

Continued on next page . . .

COMPAQ COMPUTER CORPORATION
 PROLIANT 3000

... continued from previous page


CONNECTIONS			
Purpose	Location	Purpose	Location
Chassis fan power	C1	Serial port 2	CN5
Chassis fan power	C2	Serial port 1	CN6
Management display connector	C3	Ultra Wide SCSI interface	CN7
Management display connector	C4	Ultra Wide SCSI interface	CN8
External battery	C5	IDE interface	CN9
Floppy power lock connector	C6	Floppy drive interface	CN10
Chassis fan power	C7	I2O connector	CN11
Chassis fan power	C8	3.3v power	P1
Chassis fan power	C9	5v power	P2
VGA port	CN1	32-bit PCI slots	PC1 – PC8
Parallel port	CN2	Memory slot	SL1
SCSI interface	CN3	CPU slot	SL2
PS/2 mouse port	CN4	CPU slot	SL3

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í On board video enabled	SW1/1	Off
On board video disabled	SW1/1	On
í Setup access enabled	SW1/2	Off
Setup access disabled	SW1/2	On
í System setup in a tower	SW1/3	Off
System setup in a rack mount	SW1/3	On
í Floppy drive boot enabled	SW1/4	On
Floppy drive boot disabled	SW1/4	Off
í Password normal operation	SW1/5	Off
Password clear	SW1/5	On
í NVRAM is validated, configuration not lost	SW1/6	Off
NVRAM is invalidated, configuration is lost	SW1/6	On

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
 PROLIANT 3000

... continued from previous page

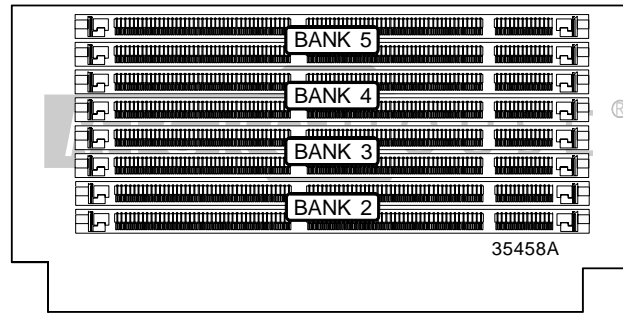

MEMORY CARD

DIMM CONFIGURATION						
Size	Bank 0	Bank 1	Bank 2	Bank 3	Bank 4	Bank 5
64MB	None	None	(2) 4M x 64	None	None	None
96MB	(2) 2M x 64	None	(2) 4M x 64	None	None	None
128MB	(2) 4M x 64	None	(2) 4M x 64	None	None	None
128MB	(2) 2M x 64	None	(2) 4M x 64	(2) 2M x 64	None	None
192MB	(2) 4M x 64	None	(2) 4M x 64	(2) 4M x 64	None	None
256MB	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64	None	None
256MB	(2) 8M x 64	None	(2) 8M x 64	None	None	None
384MB	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64
512MB	(2) 16M x 64	None	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64
512MB	(2) 8M x 64	(2) 8M x 64	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64	(2) 4M x 64

Note: Board accepts EDO memory.

CACHE CONFIGURATION
Note: 512KB cache is located on the Pentium II CPU.

VIDEO MEMORY CONFIGURATION
Note: The size and location of the video memory is unidentified.

CPU SPEED SELECTION						
CPU speed	Clock speed	Multiplier	SW2/1	SW2/2	SW2/3	SW2/4
300MHz	66MHz	4.5x	On	On	Off	On

CPU SPEED SELECTION (CON'T)						
CPU speed	Clock speed	Multiplier	SW2/5	SW2/6	SW2/7	SW2/8
300MHz	66MHz	4.5x	Off	Off	Off	Off