


HEWLETT-PACKARD COMPANY
HP VECTRA 500 MODEL 510 (PENTIUM), 515, 560,
562, 564, 572, 574

Device Type	Mainboard
Processor	Pentium
Processor Speed	75/90/100/120/133/166MHz
Chip Set	Intel
Video Chip Set	Unidentified
Maximum Onboard Memory	128MB
Maximum Video Memory	2MB
Cache	256KB
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA feature connector, VGA port, cache slot, VRM connector
NPU Options	None

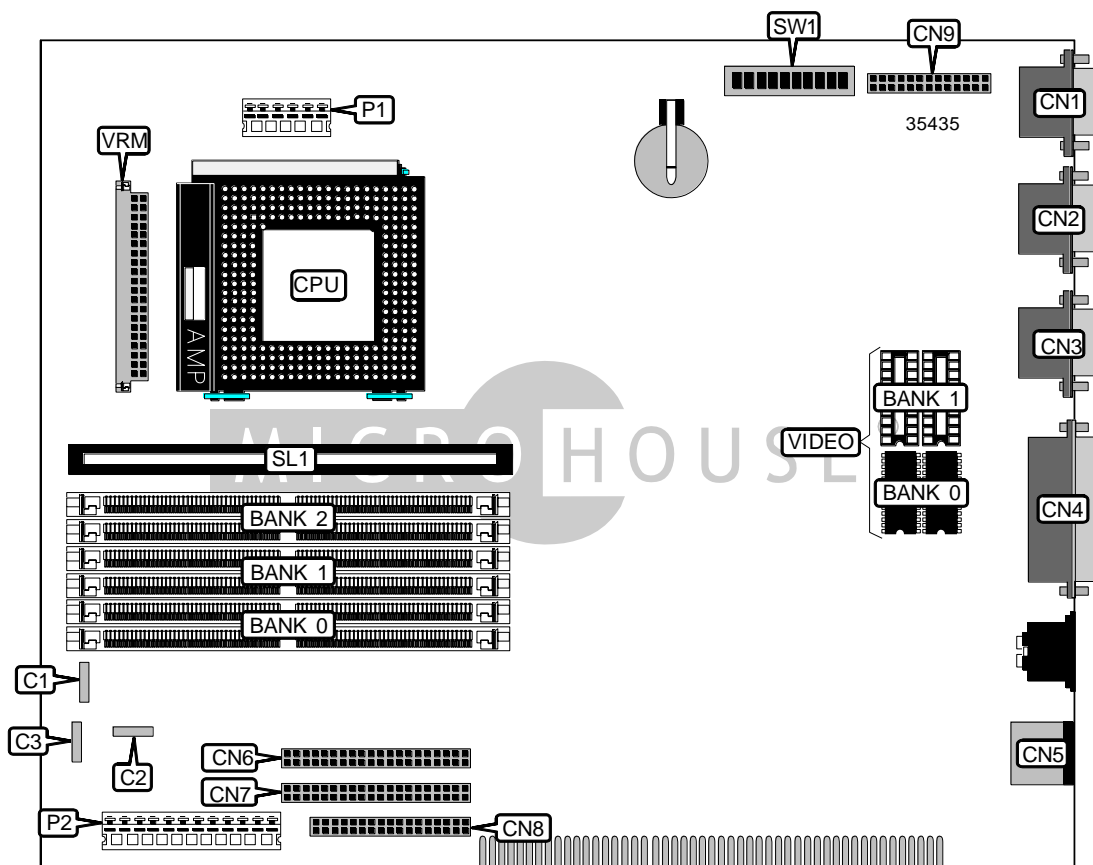

Continued on next page. . .

HEWLETT-PACKARD COMPANY
 HP VECTRA 500 MODEL 510 (PENTIUM), 515, 560,
 562, 564, 572, 574

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Status panel connector	C1	IDE interface 1	CN6
External battery	C2	IDE interface 2	CN7
Speaker	C3	Floppy drive interface	CN8
VGA port	CN1	VGA feature connector	CN9
Serial port 2	CN2	3.3v power supply	P1
Serial port 1	CN3	5v power supply	P2
Parallel port	CN4	Cache slot	SL1
PS/2 mouse port	CN5	VRM connector	VRM

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Password enabled	SW1/5	Off
Password disabled	SW1/5	On
í CMOS memory normal operation	SW1/6	Off
CMOS memory clear	SW1/6	On
í Setup access enabled	SW1/8	Off
Setup access disabled	SW1/8	On
í Keyboard power on disabled	SW1/9	Off
Keyboard power on enabled	SW1/9	On
í Factory configured - do not alter	SW1/10	Off

SIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	None
32MB	(2) 4M x 36	None	None
64MB	(2) 4M x 36	(2) 4M x 36	None
64MB	(2) 8M x 36	None	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
128MB	(2) 16M x 36	None	None

Continued on next page...

HEWLETT-PACKARD COMPANY

HP VECTRA 500 MODEL 510 (PENTIUM), 515, 560,
562, 564, 572, 574

... continued from previous page

CACHE CONFIGURATION	
Size	SL1
None	Not installed
256KB	256KB module installed

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 256K x 16	None
2MB	(2) 256K x 16	(2) 256K x 16

CPU SPEED SELECTION							
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/7
75MHz	50MHz	1.5x	On	On	Off	Off	Off
90MHz	60MHz	1.5x	On	Off	Off	Off	On
100MHz	66MHz	1.5x	Off	On	Off	Off	On
120MHz	60MHz	2x	On	Off	On	Off	On
133MHz	66MHz	2x	Off	On	On	Off	On
166MHz	66MHz	2.5x	Off	On	On	On	On