


COMPAQ COMPUTER CORPORATION

PROLIANT 1600

Device Type	Mainboard
Processor	Pentium II
Processor Speed	266/300/333MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	512MB (EDO supported)
Maximum Video Memory	Unidentified
Cache	256/512KB (located on Pentium II CPU)
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options (I/O board)	32-bit PCI slots (6), parallel port, PS/2 mouse port, serial ports (2)
I/O Options (processor board)	Ethernet 10Base5 connector, Ethernet 10BaseT connector, SCSI interface, VGA port, memory slot
NPU Options	None

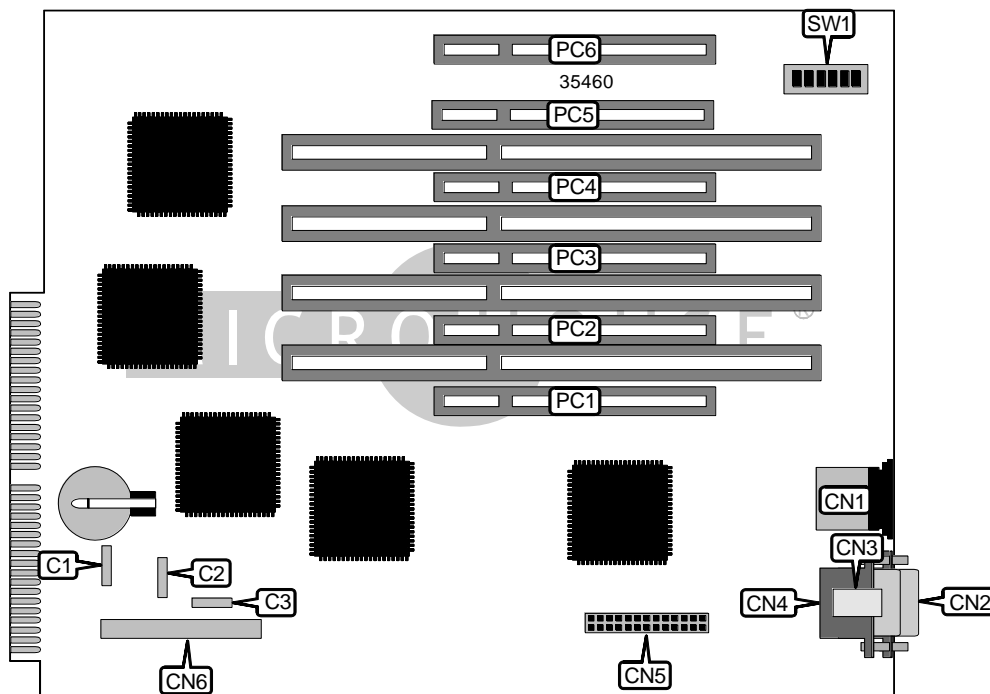

Continued on next page...

COMPAQ COMPUTER CORPORATION
 PROLIANT 1600

... continued from previous page


CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	C1	Parallel port	CN3
Battery jumper	C2	Serial port 2	CN4
External battery	C3	Parallel port connector	CN5
PS/2 mouse port	CN1	I2O connector	CN6
Serial port 1	CN2	32-bit PCI slots	PC1 – PC6

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í On board video enabled	SW1/1	Off
On board video disabled	SW1/1	On
í Setup access enabled	SW1/2	Off
Setup access disabled	SW1/2	On
í System setup in a tower	SW1/3	Off
System setup in a rack mount	SW1/3	On
í Floppy drive boot enabled	SW1/4	Off
Floppy drive boot disabled	SW1/4	On
í Password normal operation	SW1/5	Off
Password clear	SW1/5	On
í NVRAM is validated, configuration not lost	SW1/6	Off
NVRAM is invalidated, configuration is lost	SW1/6	On

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
 PROLIANT 1600

... continued from previous page

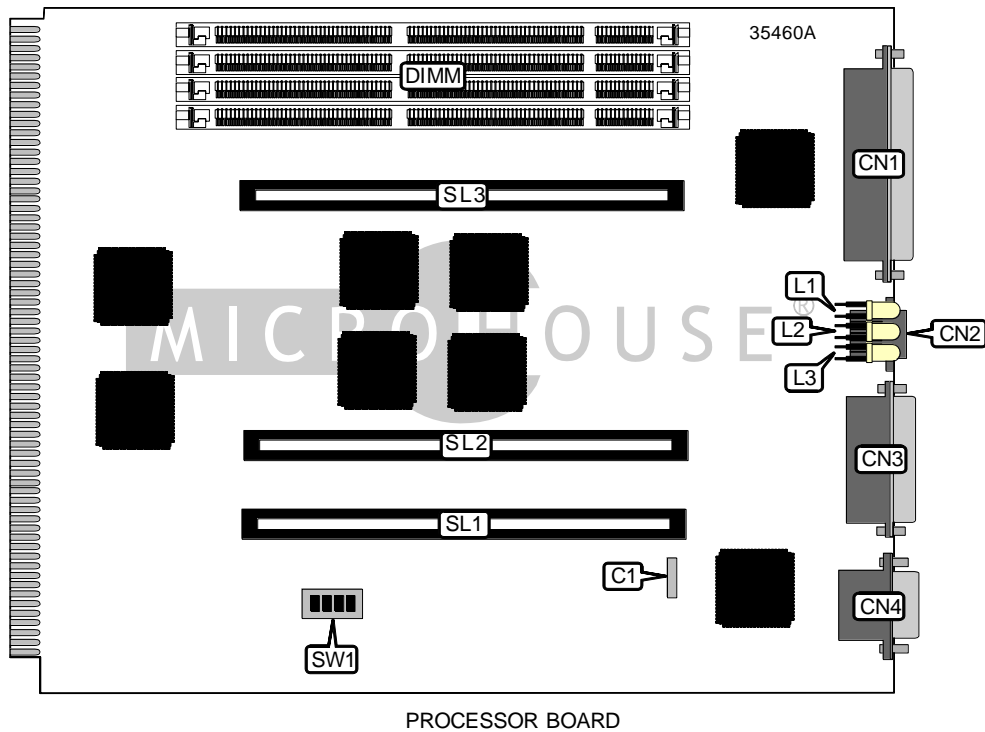

CONNECTIONS			
Purpose	Location	Purpose	Location
CPU fan power	C1	Link LED	L2
SCSI interface	CN1	Active LED	L3
Ethernet 10BaseT connector	CN2	Memory card slot	SL1
Ethernet 10Base5 connector	CN3	CPU slot 1	SL2
VGA port	CN4	CPU slot 2	SL3
Speed LED	L1		

DIMM CONFIGURATION		
Size	Bank 0	Bank 1
32MB	(2) 2M x 64	None
64MB	(2) 4M x 64	None
96MB	(2) 2M x 64	(2) 4M x 64
128MB	(2) 8M x 64	None
160MB	(2) 2M x 64	(2) 8M x 64

Continued on next page...

COMPAQ COMPUTER CORPORATION
 PROLIANT 1600

... continued from previous page

DIMM CONFIGURATION (CON'T)		
Size	Bank 0	Bank 1
192MB	(2) 8M x 64	(2) 4M x 64
256MB	(2) 16M x 64	None
256MB	(2) 8M x 64	(2) 8M x 64
288MB	(2) 2M x 64	(2) 16M x 64
320MB	(2) 16M x 64	(2) 4M x 64
384MB	(2) 16M x 64	(2) 8M x 64
512MB	(2) 16M x 64	(2) 16M x 64
Note: Board accepts EDO memory. Above configuration is for the onboard memory. The maximum memory available on the memory card is unidentified.		

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium II CPU.

VIDEO MEMORY CONFIGURATION
Note: The size and location of the video memory is unidentified.

CPU SPEED SELECTION						
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4
266MHz	66MHz	4x	Off	On	On	Off
300MHz	66MHz	4.5x	Off	Off	On	Off
333MHz	66MHz	5x	Off	On	Off	Off