


# SOLTEK COMPUTER, INC.

## SL-56C1, SL-56C5

<b>Device Type</b>	Mainboard
<b>Processor</b>	CX MII/AM K5/AM K6/AM K6-2/IDT C6/Pentium/Pentium MMX
<b>Processor Speed</b>	133/166/200/225/233/250/266/300/333/350MHz
<b>Chip Set</b>	VIA MVP3
<b>Maximum Onboard Memory</b>	768MB (SDRAM & PC100 supported)
<b>Cache</b>	512/1024KB
<b>BIOS</b>	Award
<b>Dimensions</b>	305mm x 180mm
<b>I/O Options</b>	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, wake on LAN connector

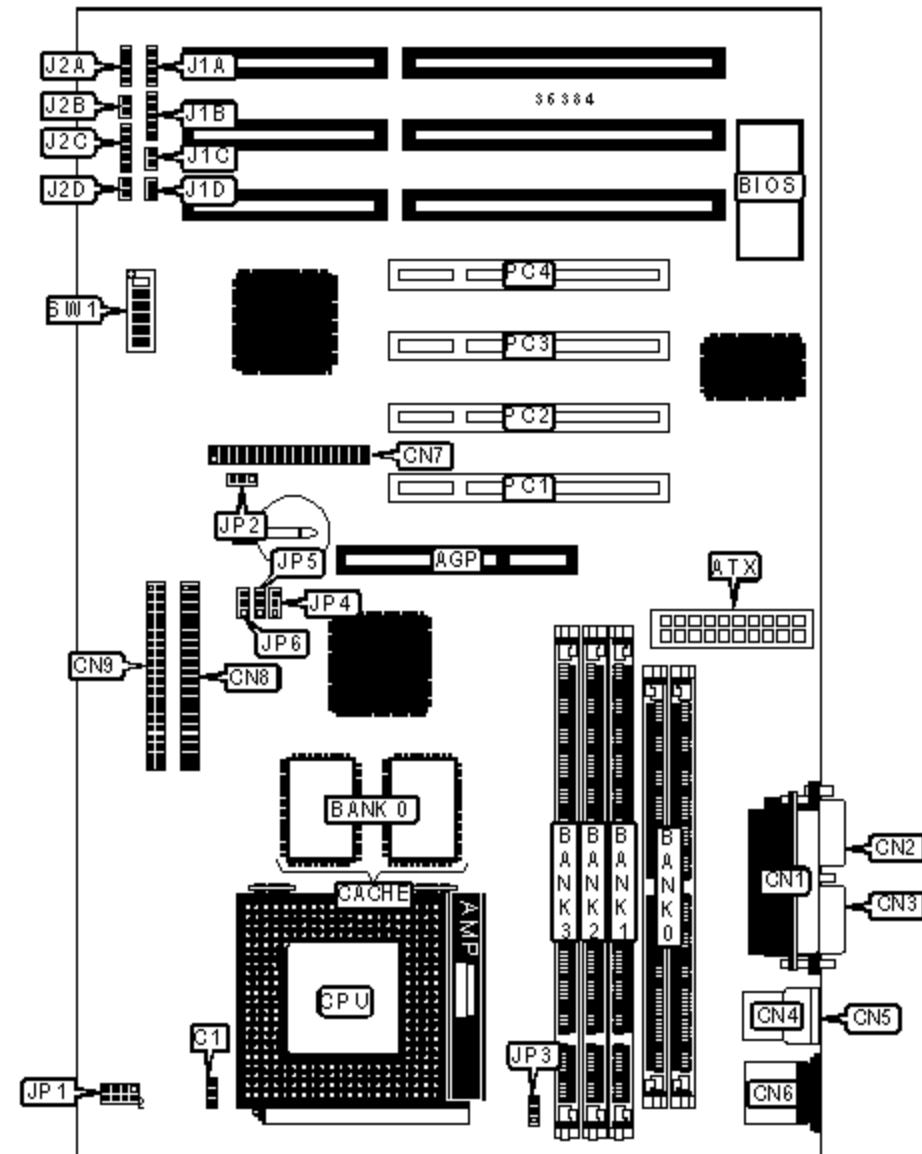

### CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	IDE interface 1	CN9
ATX power connector	ATX	IDE interface LED	J1A

Chassis fan power	C1	IR connector	J1B
Parallel port	CN1	Soft off power supply	J1C
Serial port 2	CN2	Green PC connector	J1D
Serial port 1	CN3	Speaker	J2A
USB connector 1	CN4	Reset switch	J2B
USB connector 2	CN5	Power LED & keylock	J2C
PS/2 mouse port	CN6	Green PC LED	J2D
Floppy drive interface	CN7	32-bit PCI slots	PC1 - PC4
IDE interface 2	CN8		

### USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	JP2	Pins 1 & 2 closed
	CMOS memory clear	JP2	Pins 2 & 3 closed

### SIMM CONFIGURATION

Size	Bank 0
8MB	(2) 1M x 36
16MB	(2) 2M x 36
32MB	(2) 4M x 36
64MB	(2) 8M x 36
128MB	(2) 16M x 36
256MB	(2) 32M x 36
Note: Board accepts EDO memory.	

### DIMM CONFIGURATION

Size	Bank 1	Bank 2	Bank 3
------	--------	--------	--------

8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None

### DIMM CONFIGURATION (CON'T)

Size	Bank 1	Bank 2	Bank 3
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None

96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 32M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64

288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board accepts EDO & SDRAM & PC100 memory.

### DIMM CLOCK CONFIGURATION

Setting	JP3	JP4
Asynchronous	Pins 1 & 2 closed	Pins 1 & 2 closed
Synchronous	Pins 2 & 3 closed	Pins 2 & 3 closed

### CACHE CONFIGURATION

Size	Bank 0
512KB	(2) 64K x 32

### CPU SPEED SELECTION (CX MII)

CPU speed	Clock speed	Multiplier	JP5	JP6
300MHz	66MHz	3.5x	Pins 2 & 3 closed	Pins 2 & 3 closed
300MHz	75MHz	3x	Pins 2 & 3 closed	Pins 2 & 3 closed
333MHz	100MHz	2.5x	Pins 2 & 3 closed	Pins 1 & 2 closed
333MHz	66MHz	4x	Pins 2 & 3 closed	Pins 2 & 3 closed
333MHz	75MHz	2.5x	Pins 2 & 3 closed	Pins 2 & 3 closed

333MHz	75MHz	3.5x	Pins 2 & 3 closed	Pins 2 & 3 closed
350MHz	83MHz	3.5x	Pins 1 & 2 closed	Pins 1 & 2 closed
350MHz	100MHz	3x	Pins 2 & 3 closed	Pins 1 & 2 closed

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (CX MII, CON'T)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
300MHz	66MHz	3.5x	Off	On	On	Off	Off	Off
300MHz	75MHz	3x	Off	Off	On	Off	On	Off
333MHz	100MHz	2.5x	On	On	Off	On	On	Off
333MHz	66MHz	4x	Off	On	On	On	Off	On
333MHz	75MHz	3.5x	Off	Off	On	Off	Off	Off
350MHz	83MHz	3.5x	Off	On	Off	Off	Off	Off
350MHz	100MHz	3x	On	On	Off	Off	On	Off

CPU SPEED SELECTION (IDT C6)				
CPU speed	Clock speed	Multiplier	JP5	JP6
200MHz	66MHz	3x	Pins 2 & 3 closed	Pins 2 & 3 closed
225MHz	75MHz	3x	Pins 2 & 3 closed	Pins 2 & 3 closed

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (IDT C6, CON'T)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
200MHz	66MHz	3x	On	On	Off	On	Off	On
225MHz	75MHz	3x	On	On	Off	Off	Off	Off

**CPU SPEED SELECTION (AM K5)**

CPU speed	Clock speed	Multiplier	JP5	JP6
133MHz	66MHz	2x	Pins 2 & 3 closed	Pins 2 & 3 closed
166MHz	66MHz	2.5x	Pins 2 & 3 closed	Pins 2 & 3 closed
200MHz	66MHz	3x	Pins 2 & 3 closed	Pins 2 & 3 closed

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (AM K5, CON'T)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
133MHz	66MHz	2x	Off	On	On	On	Off	Off
166MHz	66MHz	2.5x	Off	On	On	On	On	Off
200MHz	66MHz	3x	Off	On	On	Off	On	Off

CPU SPEED SELECTION (AM K6)				
CPU speed	Clock speed	Multiplier	JP5	JP6
200MHz	66MHz	3x	Pins 2 & 3 closed	Pins 2 & 3 closed
233MHz	66MHz	3.5x	Pins 2 & 3 closed	Pins 2 & 3 closed
266MHz	66MHz	4x	Pins 2 & 3 closed	Pins 2 & 3 closed
300MHz	66MHz	4.5x	Pins 2 & 3 closed	Pins 2 & 3 closed

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (AM K6, CON'T)								
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
200MHz	66MHz	3x	Off	On	On	Off	On	Off
233MHz	66MHz	3.5x	Off	On	On	Off	Off	Off
266MHz	66MHz	4x	Off	On	On	On	Off	On
300MHz	66MHz	4.5x	Off	On	On	On	On	On

**CPU SPEED SELECTION (AM K6-2)**

CPU speed	Clock speed	Multiplier	JP5	JP6
250MHz	100MHz	2.5x	Pins 2 & 3 closed	Pins 1 & 2 closed
266MHz	66MHz	4x	Pins 2 & 3 closed	Pins 2 & 3 closed
300MHz	100MHz	3x	Pins 2 & 3 closed	Pins 1 & 2 closed
333MHz	95MHz	3.5x	Pins 2 & 3 closed	Pins 1 & 2 closed
350MHz	100MHz	3.5x	Pins 2 & 3 closed	Pins 1 & 2 closed

Note: Pins designated should be in the closed position.

**CPU SPEED SELECTION (AM K6-2, CON'T)**

CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
250MHz	100MHz	2.5x	On	On	Off	On	On	Off
266MHz	66MHz	4x	Off	On	On	On	Off	On
300MHz	100MHz	3x	On	On	Off	Off	On	Off
333MHz	95MHz	3.5x	On	Off	Off	Off	Off	Off
350MHz	100MHz	3.5x	On	On	Off	Off	Off	Off

**CPU SPEED SELECTION (PENTIUM)**

CPU speed	Clock speed	Multiplier	JP5	JP6
133MHz	66MHz	2x	Pins 2 & 3 closed	Pins 2 & 3 closed
166MHz	66MHz	2.5x	Pins 2 & 3 closed	Pins 2 & 3 closed
200MHz	66MHz	3x	Pins 2 & 3 closed	Pins 2 & 3 closed

Note: Pins designated should be in the closed position.

**CPU SPEED SELECTION (PENTIUM, CON'T)**

CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
133MHz	66MHz	2x	Off	On	On	On	Off	Off



166MHz	66MHz	2.5x	Off	On	On	On	On	Off
200MHz	66MHz	3x	Off	On	On	Off	On	Off

### CPU SPEED SELECTION (PENTIUM MMX)

CPU speed	Clock speed	Multiplier	JP5	JP6
166MHz	66MHz	2.5x	Pins 2 & 3 closed	Pins 2 & 3 closed
200MHz	66MHz	3x	Pins 2 & 3 closed	Pins 2 & 3 closed
233MHz	66MHz	3.5x	Pins 2 & 3 closed	Pins 2 & 3 closed

Note: Pins designated should be in the closed position.

### CPU SPEED SELECTION (PENTIUM MMX, CON'T)

CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
166MHz	66MHz	2.5x	Off	On	On	On	On	Off
200MHz	66MHz	3x	Off	On	On	Off	On	Off
233MHz	66MHz	3.5x	Off	On	On	Off	Off	Off

### CPU VOLTAGE SELECTION

Voltage	JP1/pins 1 & 2	JP1/pins 3 & 4	JP1/pins 5 & 6	JP1/pins 7 & 8
2.0v	Open	Open	Open	Open
2.1v	Closed	Open	Open	Open
2.2v	Open	Closed	Open	Open
2.3v	Closed	Closed	Open	Open
2.4v	Open	Open	Closed	Open
2.5v	Closed	Open	Closed	Open
2.6v	Open	Closed	Closed	Open
2.7v	Closed	Closed	Closed	Open
2.8v	Open	Open	Open	Closed

2.9v	Closed	Open	Open	Closed
3.0v	Closed	Open	Closed	Open
3.1v	Closed	Closed	Open	Closed
3.2v	Open	Open	Closed	Closed
3.3v	Closed	Open	Closed	Closed
3.4v	Open	Closed	Closed	Closed
3.5v	Closed	Closed	Closed	Closed