


AMPTRON INTERNATIONAL, INC.

PII-3100

Device Type	Mainboard
Processor	Pentium II/Celeron
Processor Speed	233/266/300/333/350/366/400/450MHz
Chip Set	Intel 440BX
Maximum Onboard Memory	1GB (SDRAM supported)
Cache	0/128/256/512KB (located on the CPU)
BIOS	Award
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, SB-link connector, wake on LAN connector

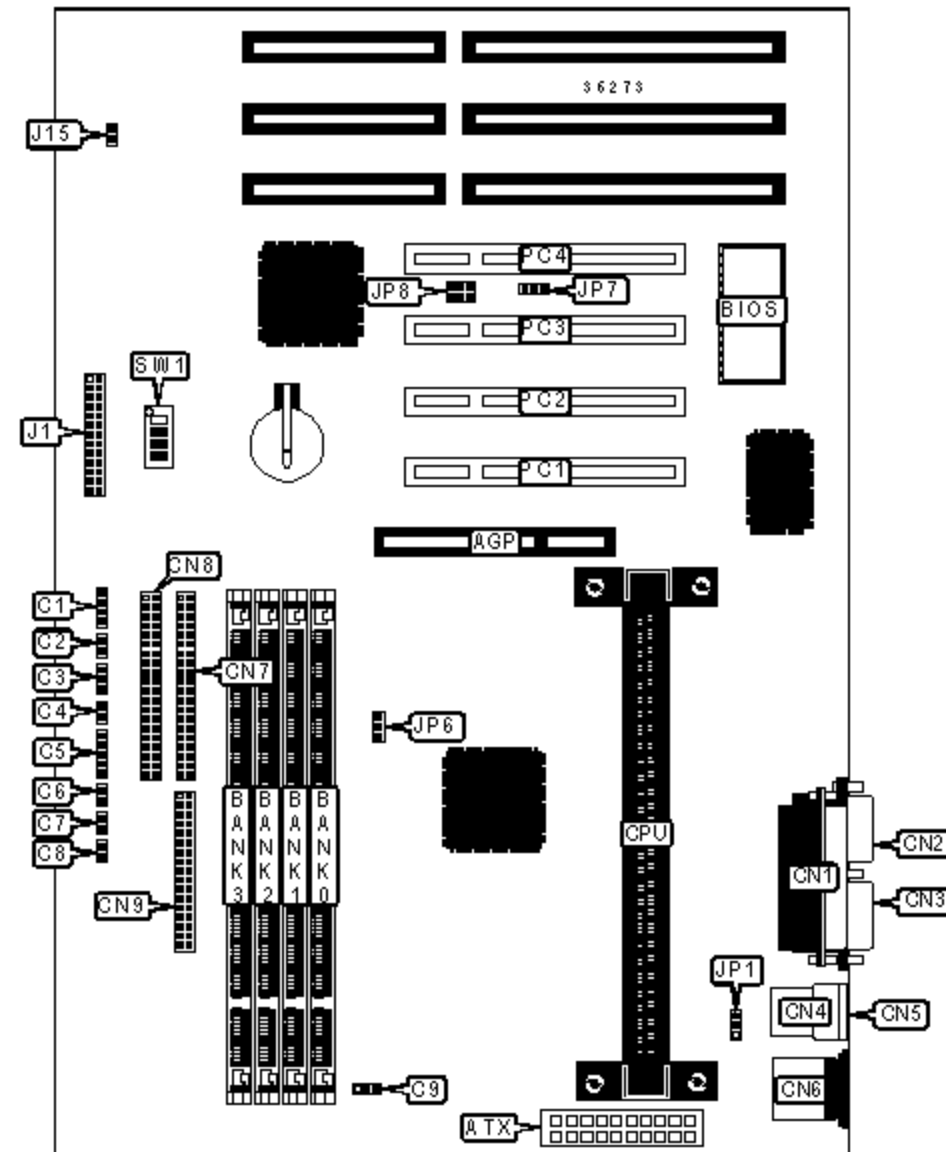

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Serial port 1	CN2
ATX power connector	ATX	Serial port 2	CN3

Speaker	C1	USB connector 1	CN4
Reset switch	C2	USB connector 2	CN5
Power LED	C3	PS/2 mouse port	CN6
IDE interface LED	C4	IDE interface 2	CN7
IR connector	C5	IDE interface 1	CN8
Green PC connector	C6	Floppy drive interface	CN9
Soft off power supply	C7	Wake on LAN connector	JP7
Green PC LED	C8	SB-link connector	JP8
Chassis fan power	C9	32-bit PCI slots	PC1 - PC4
Parallel port	CN1		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	J1	Unidentified
	ATX power supply select soft on/off	J15	Closed
	ATX power supply select hard on/off	J15	Open
	Keyboard power on enabled	JP1	Pins 1 & 2 closed
	Keyboard power on disabled	JP1	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None	None

32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
72MB	(1) 8M x 64	(1) 1M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 16M x 64	None	None	None

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2	Bank 3
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
136MB	(1) 16M x 64	(1) 1M x 64	None	None
144MB	(1) 16M x 64	(1) 2M x 64	None	None
176MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 32M x 64	None	None	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
272MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
280MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64

288MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
448MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
640MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
1024MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
Note: Board accepts SDRAM memory.				

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU. 128KB cache is located on the Celeron 300A & 333 CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JP6	SW1/1	SW1/2	SW1/3	SW1/4
233MHz	66MHz	3.5x	1 & 2	Off	Off	On	On
266MHz	66MHz	4x	1 & 2	On	On	Off	On
300MHz	66MHz	4.5x	1 & 2	Off	On	Off	On
333MHz	66MHz	5x	1 & 2	On	Off	Off	On
366MHz	66MHz	5.5x	1 & 2	Off	Off	Off	On
350MHz	100MHz	3.5x	Open	Off	Off	On	On
400MHz	100MHz	4x	Open	On	On	Off	On
450MHz	100MHz	4.5x	Open	Off	On	Off	On

Note: Pins designated should be in the closed position.