## AST RESEARCH, INC.

## PREMIUM 4/33 III (501292-001)

**Device Type** Mainboard

Processor 80486DX/80486DX2


Processor Speed 33MHz
Chip Set Unidentified
Video Chip Set Cirrus Logic

**Maximum Onboard Memory** 64MB

Maximum Video MemoryUnidentifiedBIOSUnidentifiedDimensionsUnidentified

I/O Options 16-bit ISA slots (4), IDE interface, parallel port, PS/2 mouse port, PS/2 mouse

interface, serial ports (2), VGA port, cache slot, AT power connectors (2)

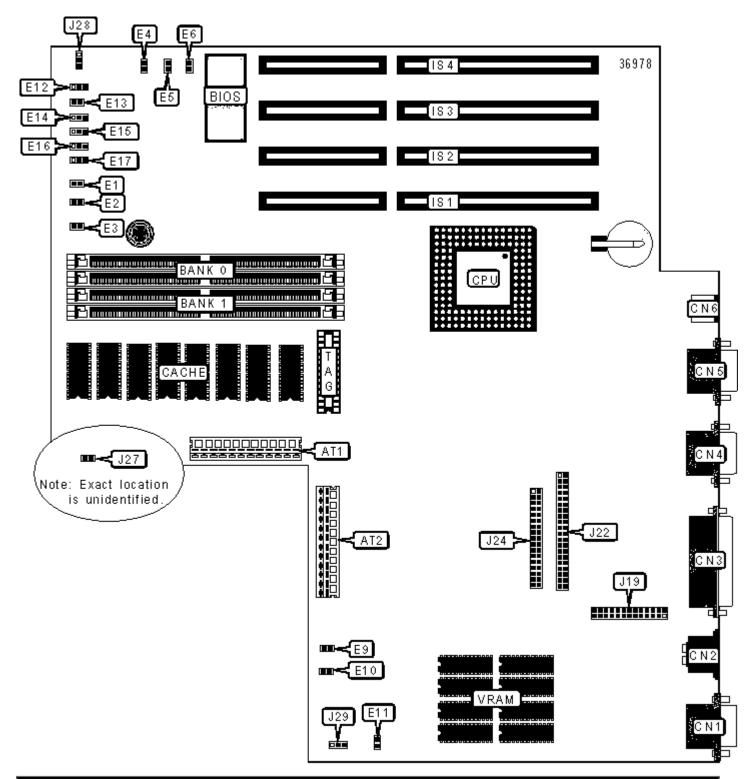

CONNECTIONS				
Purpose Location		Purpose	Location	
AT1 power connector 1	AT1	PS/2 mouse port	CN6	
AT1 power connector 2	AT2	16-bit ISA slots	IS1 - IS4	
VGA port	CN1	IDE interface 1	J22	
AT keyboard port	CN2	Floppy drive interface	J24	

Parallel port	CN3	Speaker	J27
Serial port	CN4	Fan power	J28
Serial port	CN5	Front console LEDs	J29

	USER CONFIGURABLE SETTINGS					
	Function	Label	Position			
<b>»</b>	Color display mode enabled	E4	Closed			
	Monochrome display mode enabled	E4	Open			
<b>»</b>	Integrated video enabled	E5	Closed			
	Integrated video disabled	E5	Open			
<b>»</b>	Password enabled	E6	Closed			
	Password disabled	E6	Open			
<b>»</b>	Parallel port IRQ 7	E12	Pins 1 & 2 closed			
	Parallel port IRQ 5	E12	Pins 2 & 3 closed			

SIMM CONFIGURATION				
Size	Bank 0	Bank 1		
8MB	(2) 1M x 36	None		
16MB	(2) 2M x 36	None		
16MB	(2) 1M x 36	(2) 1M x 36		
24MB	(2) 2M x 36	(2) 1M x 36		
32MB	(2) 4M x 36	None		
32MB	(2) 2M x 36	(2) 2M x 36		
40MB	(2) 4M x 36	(2) 1M x 36		
48MB	(2) 4M x 36	(2) 2M x 36		
64MB	(2) 4M x 36	(2) 4M x 36		

CACHE JUMPER CONFIGURATION				
Size	E1	E2	E3	

<b>»</b>	64KB or None	Open	Open	Open
	256KB	Closed	Closed	Closed

CPU SPEED SELECTION				
Speed	E9	E10		
25MHz	Closed	Closed		
33MHz	Open	Closed		

CPU TYPE SELECTION						
Туре	E11	E13	E14	E15	E16	E17
486SX (PQFP)	Open	Open	1 & 2	1 & 2	1 & 2	1 & 2
486SX (LIF)	Closed	Open	1 & 2	1 & 2	1 & 2	1 & 2
486DX	Closed	Closed	2 & 3	1 & 2	2 & 3	1 & 2
486DX2	Closed	Closed	2 & 3	1 & 2	2 & 3	1 & 2
ODPR	Closed	Closed	2 & 3	1 & 2	2 & 3	1 & 2
ODP	Closed	Closed	1 & 2	1 & 2	2 & 3	1 & 2
487SX	Closed	Closed	1 & 2	1 & 2	2 & 3	1 & 2
Pentium OD	Closed	Closed	2 & 3	2 & 3	2 & 3	Open
Note: Pins designated should be in the closed position.						