




# Quick Connector and Jumper Reference

## CN4: PS/2 mouse, USB, Infrared connector with optional USB kit



## CN5: Front Panel connector set

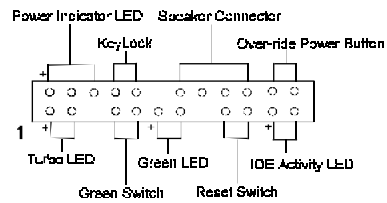

## CN6: FAN78 connector

## CPUFAN/SYSFAN: CPU/System cooling fan connector



## JP1: AT/ATX power supply jumper


1~2 : AT power  
2~3 : ATX power

## JP2: Clear CMOS data jumper

1~2 : Normal(default)  
2~3 : Clear CMOS data

## JP11: 1~2 : SDRAM module runs at CPU CLK

2~3 : SDRAM module runs at AGP CLK

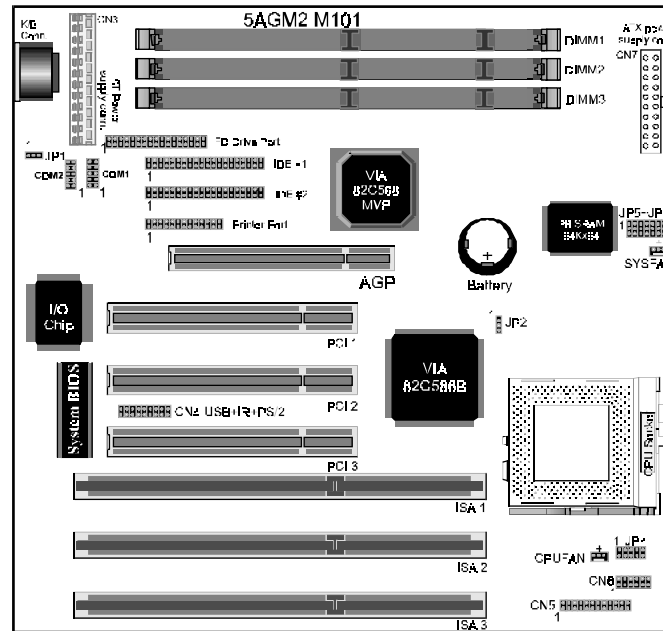

Vcore	JP4	System Freq.	JP5~JP7	Freq. Ratio	JP8~JP10
2.2V		60MHz		x 1.5	
2.8V		66MHz		x 2	
2.9V		68MHz		x 2.5	
3.2V		75MHz		x 3	
3.3V		83MHz		x 3.5	
3.5V		100MHz		x 4	
				x 4.5	
				x 5	
				x 5.5	

CPU-type		CPU Power Voltage			System freq.		Freq. ratio				
		I/O Vcc	Core Vcc	JP4	MHz	JP5~JP7	Speed rate	JP8~JP10			
Intel	P54C-133	3.5			66		x2				
	P54C-166										
	P54C-200										
	Pentium w/MMX @166MHz	3.3	2.8					x2.5			
	Pentium w/MMX @200MHz							x3			
Pentium w/MMX @233MHz				x3.5							
Cyrrix /IBM	6x86-PR166 @133MHz	3.5			66		x2				
	6x86-PR200 @150MHz										
	6x86L-PR166 @133MHz	2.8		75							
	6x86L-PR200 @150MHz			75							
	6x86MX-PR166	3.3						66		x2.5	
	6x86MX-PR200							75			
	6x86MX-PR200							75			
	6x86MX-PR233	2.9						83		x2	
	MII-300							66		x3.5	
								75		x3	
AMD	K5-PR166 @116.7MHz	3.5			66		x2.5				
	K6/166							2.9		x3	
	K6/200	3.2		x3.5							
	K6/233			3.3							
	K6/266	x4.5									
	K6/300	2.2						x4			
	K6-2/266							x4			
	K6-2/300								100		
IDT	C6-200	3.5			66		x3				
	C6-225				75						

