


# Jumper Setting Quick Reference

**JP1**  
1-2 short : Bank0 & Bank1 are installed at the same time and Bank0 is dedicated in Single Side SIMMs.

2-3 short : Bank0 & Bank1 are installed at the same time and Bank1 is dedicated in Double Side SIMMs.

\* Single Side 72-Pin SIMMs are all 1MB, 4MB or 16MB Modules.

\* Double Side 72-Pin SIMMs are all 2MB, 8MB or 32MB Modules.

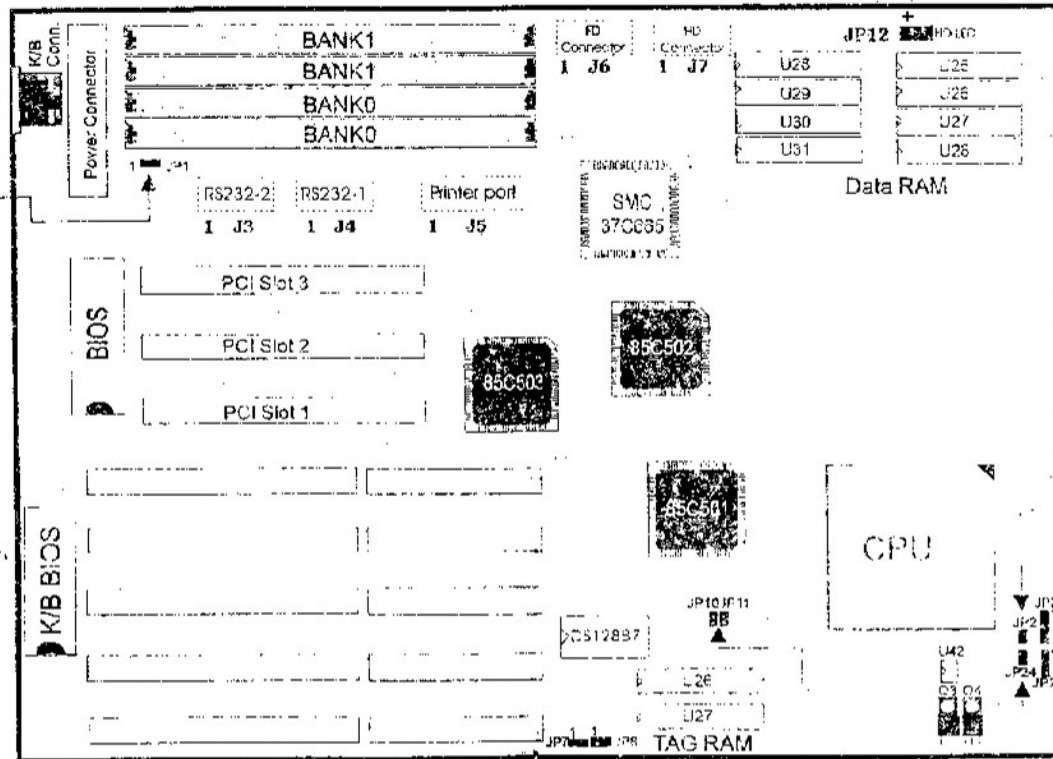

JP2 : Power Saving Green Switch Connector  
Enter the Suspended Mode Directly

JP22 : KeyLock Connector

JP26 : Speaker Connector

JP24 : Reset Connector

JP7,JP8 : Cache Size Selector Jumper

Cache Size	256K	512K	1M
JP7	1-2	2-3	2-3
JP8	1-2	1-2	2-3

JP10,JP11 : System Clock Selector Jumper

CLK	50MHz	60MHz	66MHz
JP10	open	open	short
JP11	open	short	short

005 - 32-5-183-500