


HEWLETT-PACKARD COMPANY

HP VECTRA VE C/XXX SERIES 7

Device Type	Mainboard
Processor	Celeron
Processor Speed	233/266/300/333MHz
Chip Set	Intel 440EX
Maximum Onboard Memory	256MB (SDRAM supported)
Cache	128KB (located on the Celeron CPU)
BIOS	Unidentified
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (3), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), USB connectors (2), ATX power connector, wake on LAN connector

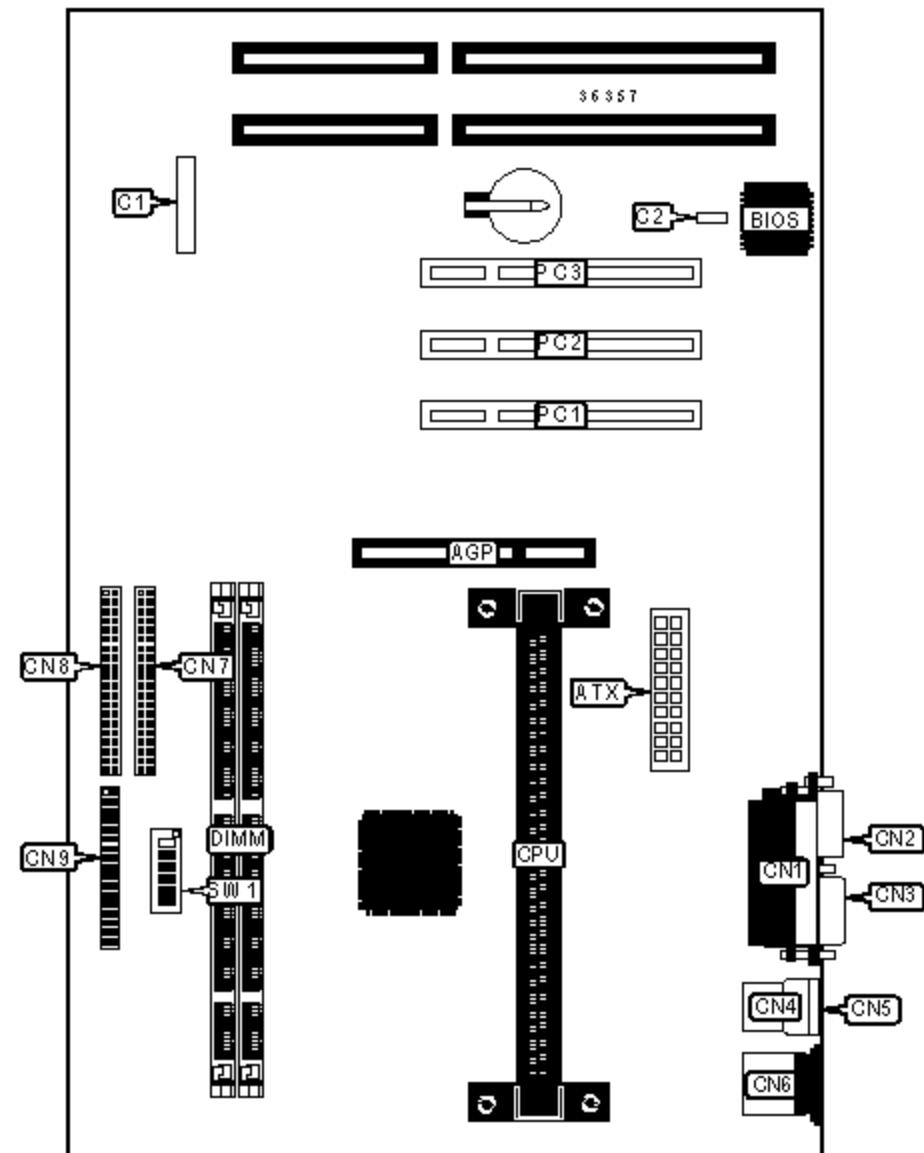

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	USB connector 1	CN4
ATX power connector	ATX	USB connector 2	CN5
Front panel connector	C1	PS/2 mouse port	CN6

Wake on LAN connector	C2	IDE interface 2	CN7
Parallel port	CN1	IDE interface 1	CN8
Serial port 2	CN2	Floppy drive interface	CN9
Serial port 1	CN3	32-bit PCI slots	PC1 - PC5

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	SW1/5	Off
	CMOS memory clear	SW1/5	On
»	Password normal operation	SW1/6	Off
	Password clear	SW1/6	On

DIMM CONFIGURATION

Size	Bank 0	Bank 1
8MB	(1) 1M x 64	None
16MB	(1) 2M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
40MB	(1) 4M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64

96MB	(1) 8M x 64	(1) 4M x 64
128MB	(1) 16M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64
136MB	(1) 16M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64
Note: Board accepts SDRAM memory. The location of the banks is unidentified.		

CACHE CONFIGURATION

Note: 128KB cache is located on the Celeron CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4
233MHz	66MHz	3.5x	On	Off	On	Off
266MHz	66MHz	4x	On	On	Off	On
300MHz	66MHz	4.5x	On	On	Off	Off
333MHz	66MHz	5x	On	Off	Off	On