


DATAEXPERT CORPORATION

MBX8440

Configuration

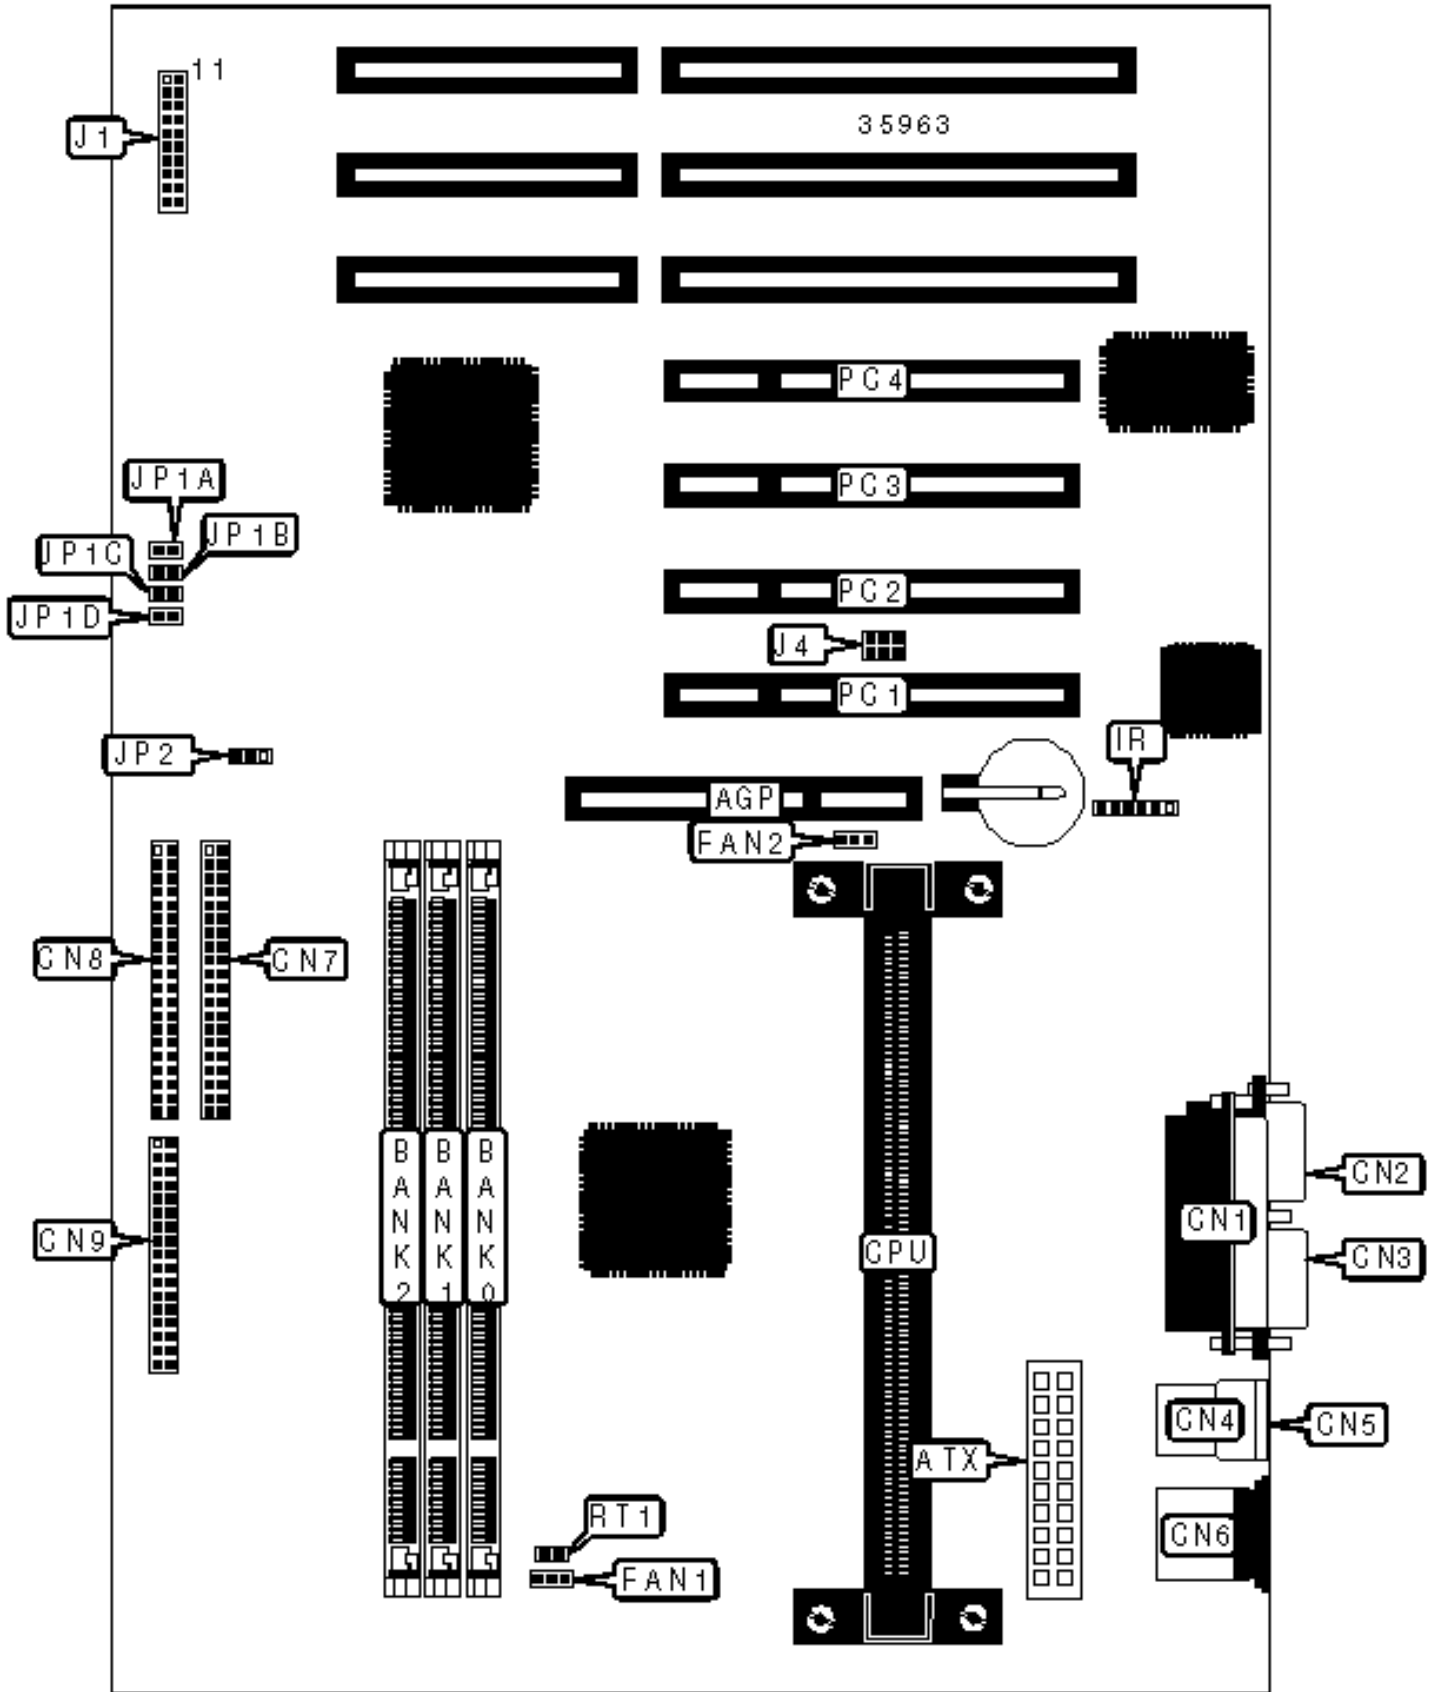

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	CPU fan power	FAN2
ATX power connector	ATX	IR connector	IR
Parallel port	CN1	Power LED & keylock	J1/pins 1 - 5
Serial port 2	CN2	IDE interface LED	J1/pins 6 & 16
Serial port 1	CN3	Green PC LED	J1/pins 7 & 17
USB connector 1	CN4	Green PC connector	J1/pins 8 & 18
USB connector 2	CN5	Soft off power supply	J1/pins 9 & 19
PS/2 mouse port	CN6	Reset switch	J1/pins 10 & 20
IDE interface 2	CN7	Speaker	J1/pins 11 - 14
IDE interface 1	CN8	SB-link connector	J4
Floppy drive interface	CN9	Thermistor connector	RT1
Chassis fan power	FAN1	32-bit PCI slots	PC1 - PC4

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None

40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None

DIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None

136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
Note: Board accepts EDO & SDRAM memory.			

CACHE CONFIGURATION

256KB/512KB cache is located on the Pentium II CPU. 128KB cache is located on the Celeron 300A & 333 C

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JP2	JP1A	JP1B	JP1C	JP1D
233MHz	66MHz	3.5x	2 & 3	Open	Open	Closed	Open

266MHz	66MHz	4x	2 & 3	Closed	Closed	Open	Closed
300MHz	66MHz	4.5x	2 & 3	Open	Closed	Open	Closed
300MHz	100MHz	3x	1 & 2	Closed	Open	Closed	Open
333MHz	66MHz	5x	2 & 3	Closed	Open	Open	Closed
350MHz	100MHz	3.5x	1 & 2	Open	Open	Closed	Open
400MHz	100MHz	4x	1 & 2	Closed	Closed	Open	Closed
450MHz	100MHz	4.5x	1 & 2	Open	Closed	Open	Closed

Note: Pins designated should be in the closed position.