


DIAMOND FLOWER, INC.

P2XBL (REV. AB+)

Configuration

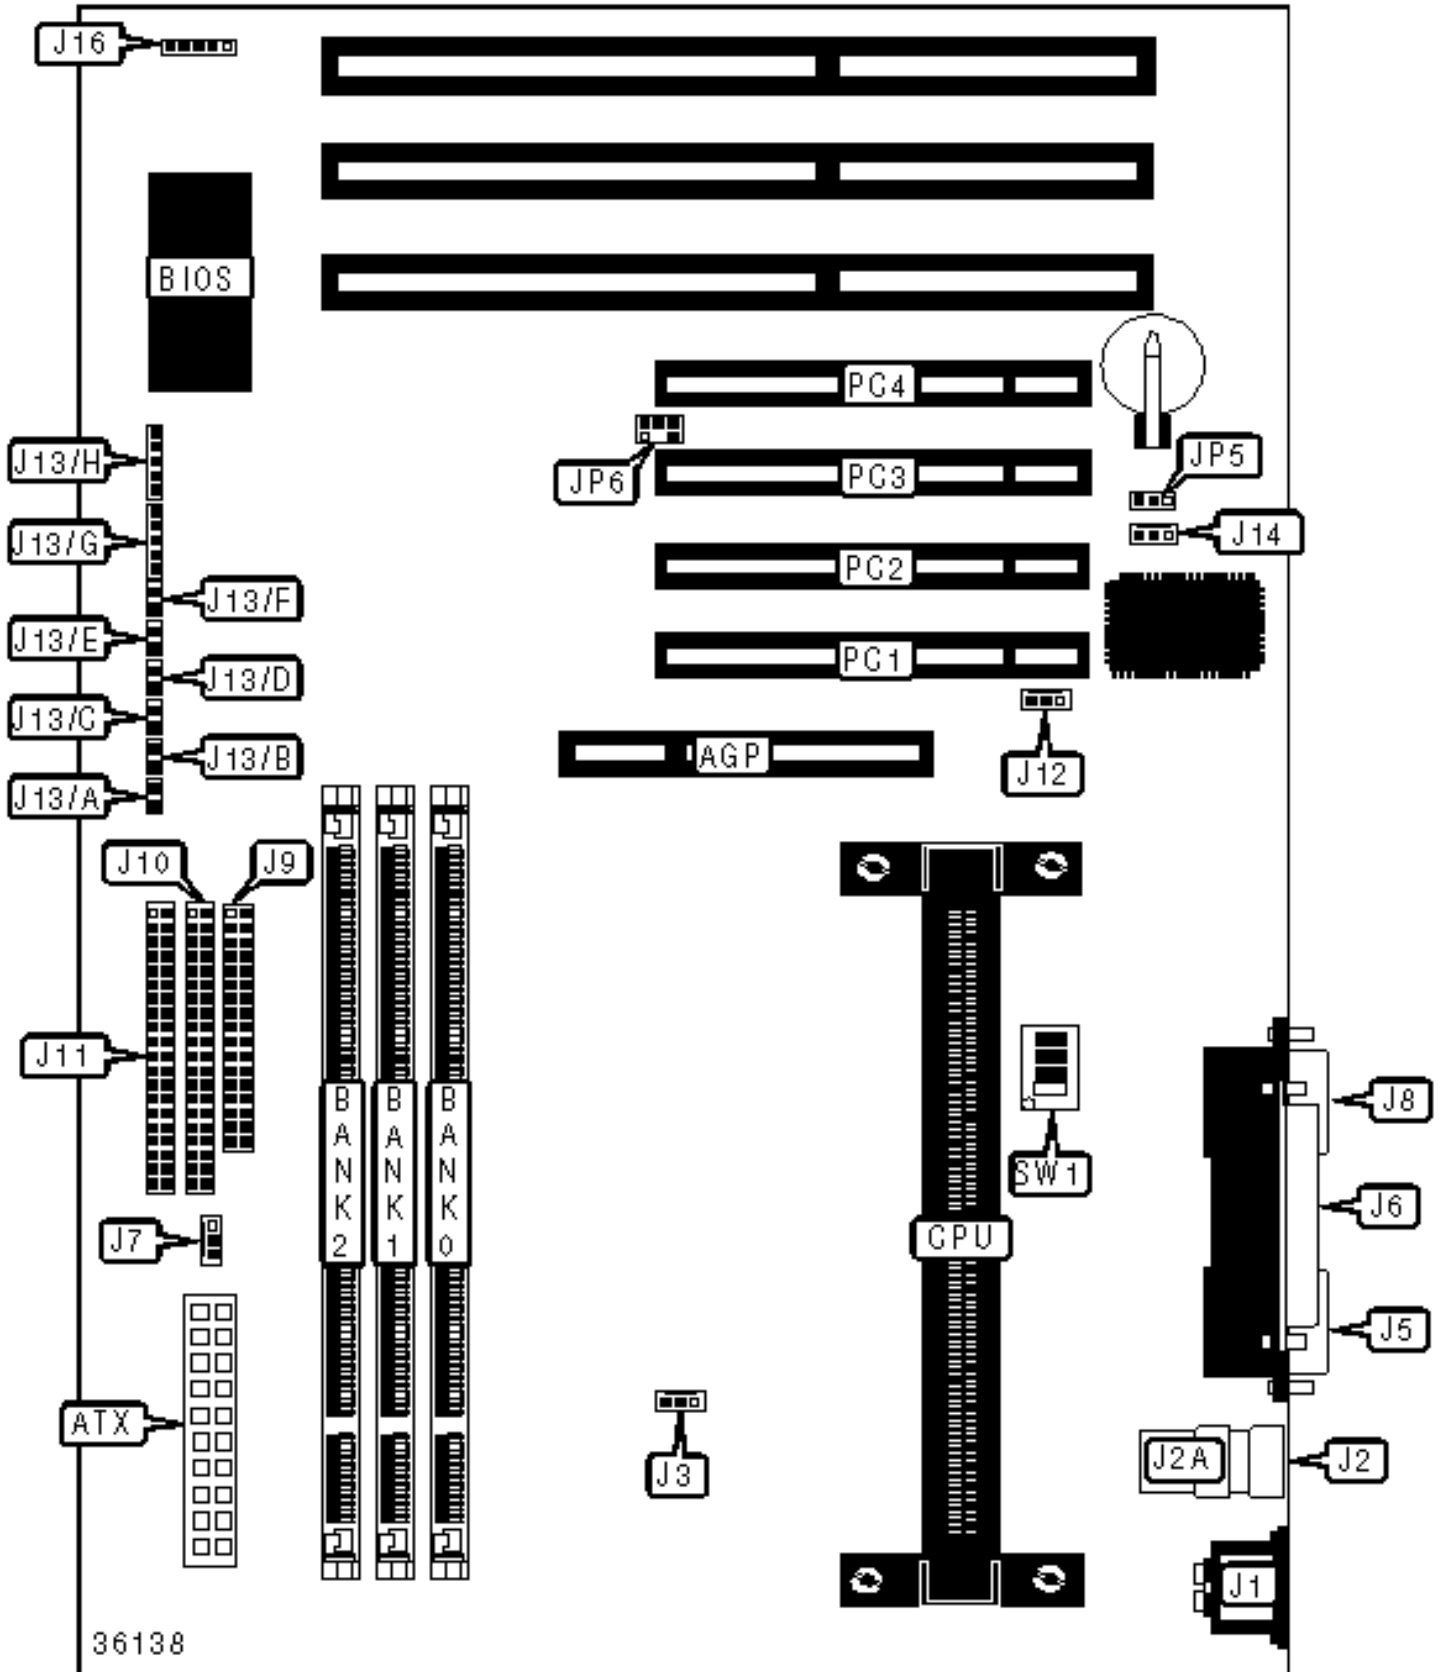

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	AGP fan power	J12
ATX power	ATX	Stand by LED	J13/A
PS/2 mouse port	J1	IDE interface LED	J13/B
USB connector 1	J2	Green PC LED	J13/C
USB connector 2	J2A	ATX power switch	J13/D
Chassis fan power	J3	Green PC switch	J13/E
Serial port 1	J5	Reset switch	J13/F
Parallel port	J6	Speaker	J13/G
CPU fan power	J7	Power LED & keylock	J13/H
Serial port 2	J8	Wake on LAN connector	J14
Floppy drive interface	J9	IR connector	J16
IDE interface 2	J10	SB link connector	JP6
IDE interface 1	J11	32-bit PCI slots	PC1 - PC4

USER CONFIGURABLE SETTINGS

Function	Label	Position
» CMOS memory normal operation	JP5	Pins 1 & 2 closed
CMOS memory clear	JP5	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None

24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 4M x 64	None	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 8M x 64	None	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
72MB	(1) 8M x 64	(1) 1M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
------	--------	--------	--------

104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
164MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
164MB	(1) 16M x 64	(1) 1M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
264MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64
272MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64

288MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

CACHE CONFIGURATION

Note: 256/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4
300MHz	100MHz	3x	On	Off	On	On
333MHz	66MHz	5x	On	Off	Off	On
350MHz	66MHz	3.5x	Off	Off	On	On
400MHz	66MHz	4x	On	On	Off	On
450MHz	66MHz	4.5x	Off	On	Off	On