


EURONE

MS-7070S

Configuration

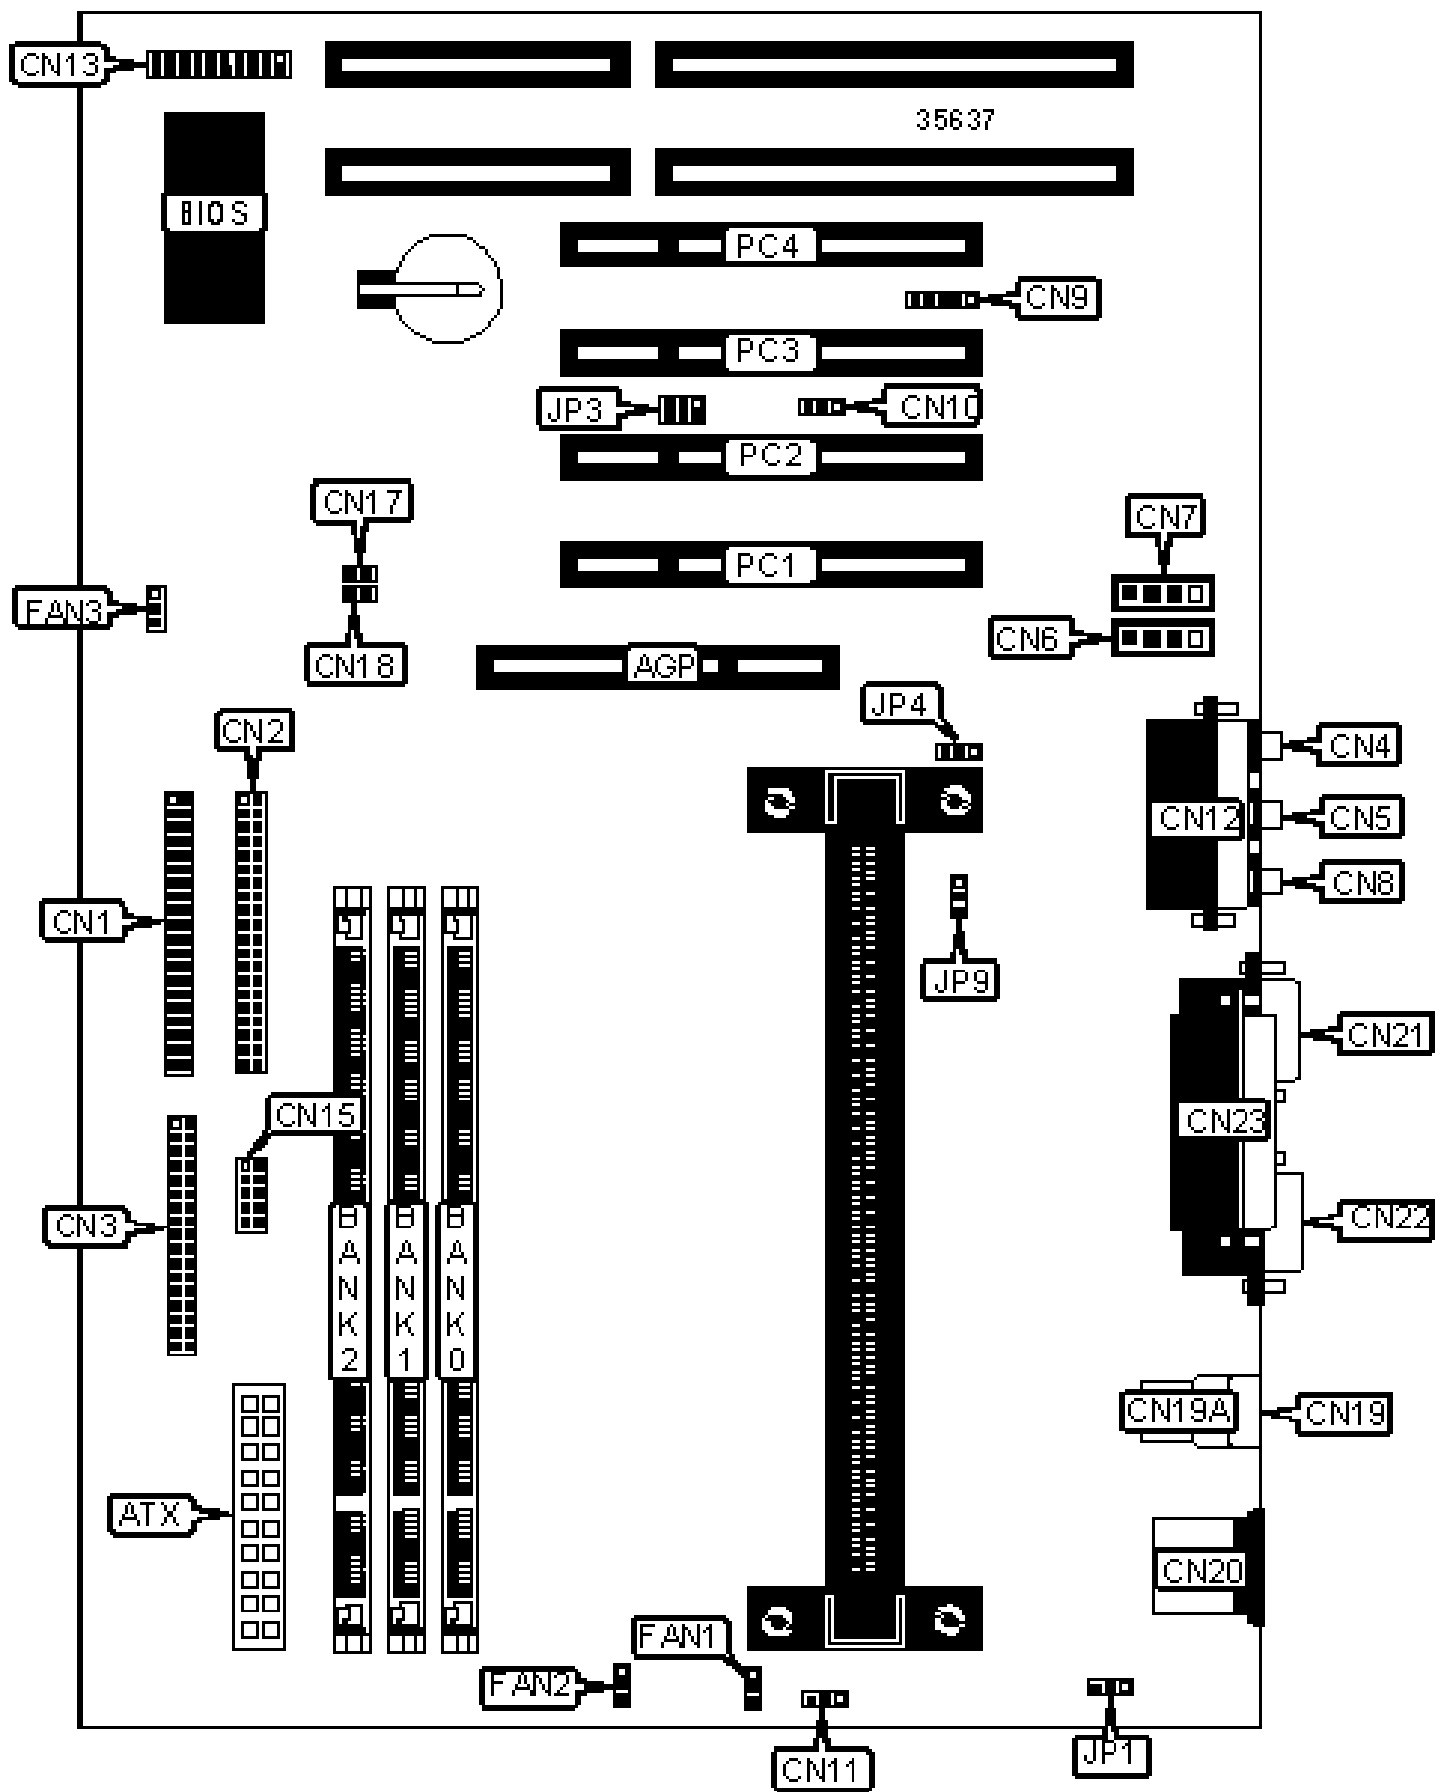

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	IDE interface LED	CN13/pins 11 & 12
ATX power connector	ATX	Power LED & keylock	CN13/pins 13 - 17
IDE interface 1	CN1	Speaker	CN13/pins 19 - 22
IDE interface 2	CN2	Soft off power supply	CN13/pins 23 & 24
Floppy drive interface	CN3	Fan II connector	CN15
Line in	CN4	Volume down connector	CN17
Line out	CN5	Volume up connector	CN18
Audio in – CD-ROM (Sony)	CN6	USB connector 1	CN19A
Audio in – CD-ROM	CN7	USB connector 2	CN19
Microphone in	CN8	PS/2 mouse port	CN20
IR connector	CN9	Serial port 2	CN21
Wake on LAN connector	CN10	Serial port 1	CN22
Chassis intrusion connector	CN11	Parallel port	CN23
Game/MIDI port	CN12	CPU fan power	FAN1
Turbo switch	CN13/pins 1 & 2	CPU fan power	FAN2
Green PC connector	CN13/pins 4 & 5	Chassis fan power	FAN3
Green PC LED	CN13/pins 6 & 7	SB link connector	JP3
Reset switch	CN13/pins 9 & 10	32-bit PCI slots	PC1 - PC4

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Power on by keyboard disabled	JP1	Pins 1 & 2 closed
Power on by keyboard enabled	JP1	Pins 2 & 3 closed
» CMOS memory normal operation	JP4	Pins 1 & 2 closed

	CMOS memory clear	JP4	Pins 2 & 3 closed
--	-------------------	-----	-------------------

DIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 4M x 64	None	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 8M x 64	None	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
256MB	(1) 16M x 64	(1) 16M x 64	None
320MB	(1) 16M x 64	(1) 16M x 64	(1) 8M x 64

384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
-------	--------------	--------------	--------------

CACHE CONFIGURATION

256/512KB cache is located on the Pentium II CPU. The 128KB cache is located on the Celeron 300A & 333 CP

CPU FREQUENCY SELECTION

Frequency		JP9
»	Auto	Pins 2 & 3 closed
	100MHz	Pins 1 & 2 closed