


KAM-TRONIC COMPUTER CO., LTD.

P6KPI

Device Type	Mainboard
Processor	Pentium II
Processor Speed	200/233/266/300MHz
Chip Set	Intel 430FX
Maximum Onboard Memory	1GB (EDO supported)
Cache	256/512KB (located on Pentium II CPU)
BIOS	AMI
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), SCSI interface, Ultra-Wide SCSI interface, parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connector, ATX power connector, RAID slot,

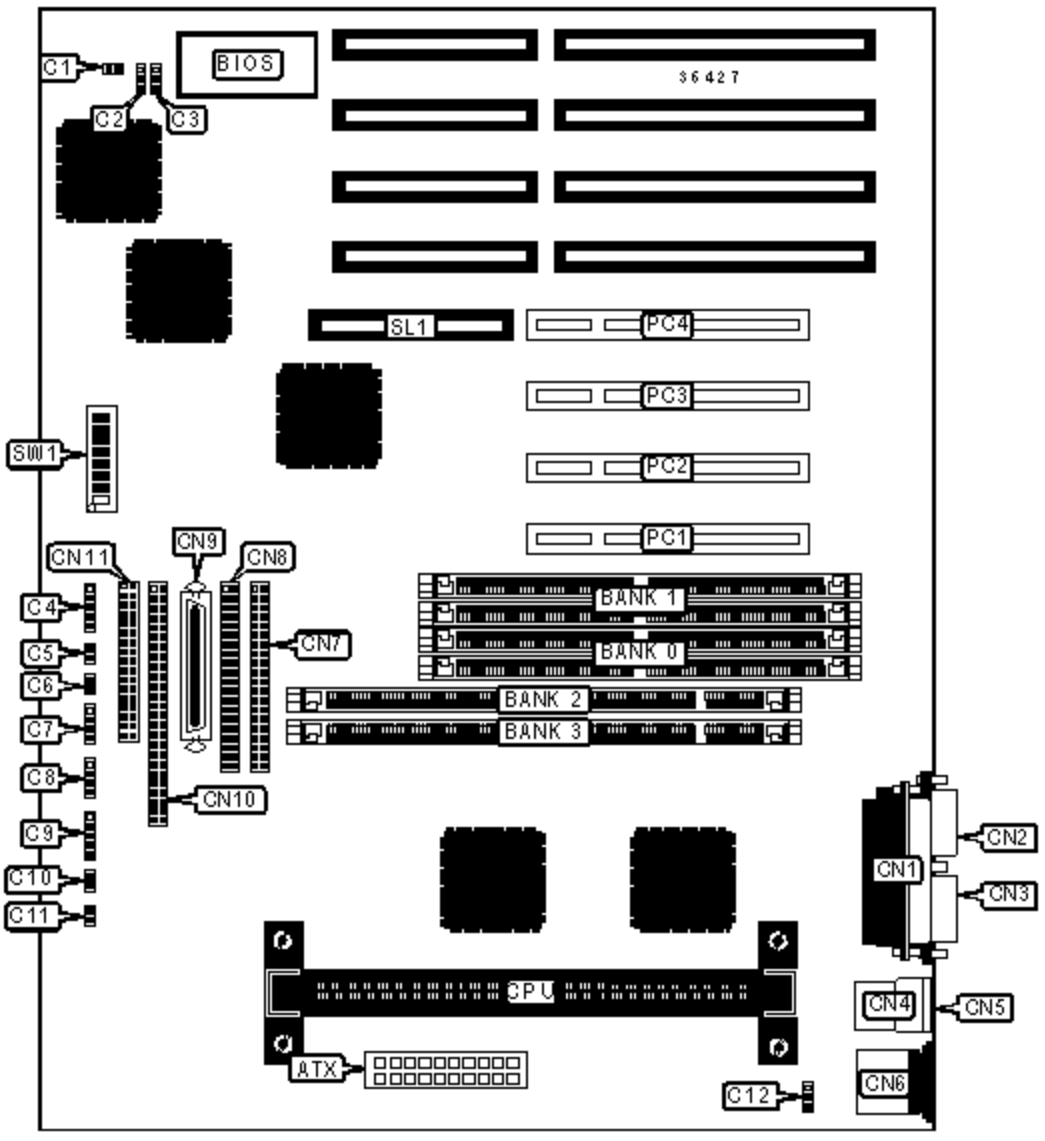

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	Serial port 1	CN1
Chassis fan power	C1	Serial port 2	CN2
Chassis fan power	C2	Parallel port	CN3

Case sensor	C3	USB connector	CN4
IR connector	C4	PS/2 mouse port	CN5
Green PC connector	C5	IDE interface 1	CN6
Reset switch	C6	IDE interface 2	CN7
Speaker	C7	Ultra-Wide SCSI interface	CN8
IDE interface LED	C8	SCSI interface	CN9
Power LED & keylock	C9	Floppy drive interface	CN10
Turbo LED	C10	32-bit PCI slots	PC1 - PC4
Soft off power supply	C11	RAID slot	SL1
CPU fan power	C12		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	SCSI low byte enabled	SW1/8	On
	SCSI high byte enabled	SW1/8	Off

SIMM CONFIGURATION

Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36

64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
128MB	(2) 8M x 36	(2) 8M x 36
128MB	(2) 16M x 36	None
136MB	(2) 16M x 36	(2) 1M x 36
144MB	(2) 16M x 36	(2) 2M x 36
160MB	(2) 16M x 36	(2) 4M x 36
192MB	(2) 16M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36
256MB	(2) 32M x 36	None
264MB	(2) 32M x 36	(2) 1M x 36
272MB	(2) 32M x 36	(2) 2M x 36
288MB	(2) 32M x 36	(2) 4M x 36
320MB	(2) 32M x 36	(2) 8M x 36
384MB	(2) 32M x 36	(2) 16M x 36
512MB	(2) 32M x 36	(2) 32M x 36

Note: Board accepts EDO memory.

DIMM CONFIGURATION

Size	Bank 3	Bank 4
8MB	(1) 1M x 64	None
16MB	(1) 2M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
40MB	(1) 4M x 64	(1) 1M x 64

48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64
128MB	(1) 16M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64
256MB	(1) 32M x 64	None
264MB	(1) 32M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64

Note: Board accepts SDRAM memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3
200MHz	66MHz	3x	On	On	Off

233MHz	66MHz	3.5x	On	On	Off
266MHz	66MHz	4x	On	On	Off
300MHz	66MHz	4.5x	On	On	Off

CPU SPEED SELECTION (CON'T)						
CPU speed	Clock speed	Multiplier	SW1/4	SW1/5	SW1/6	SW1/7
200MHz	66MHz	3x	On	Off	On	On
233MHz	66MHz	3.5x	Off	Off	On	On
266MHz	66MHz	4x	On	On	Off	On
300MHz	66MHz	4.5x	Off	On	Off	On