


IBM CORPORATION
PC 330 SERIES (TYPE 6575)

Configuration

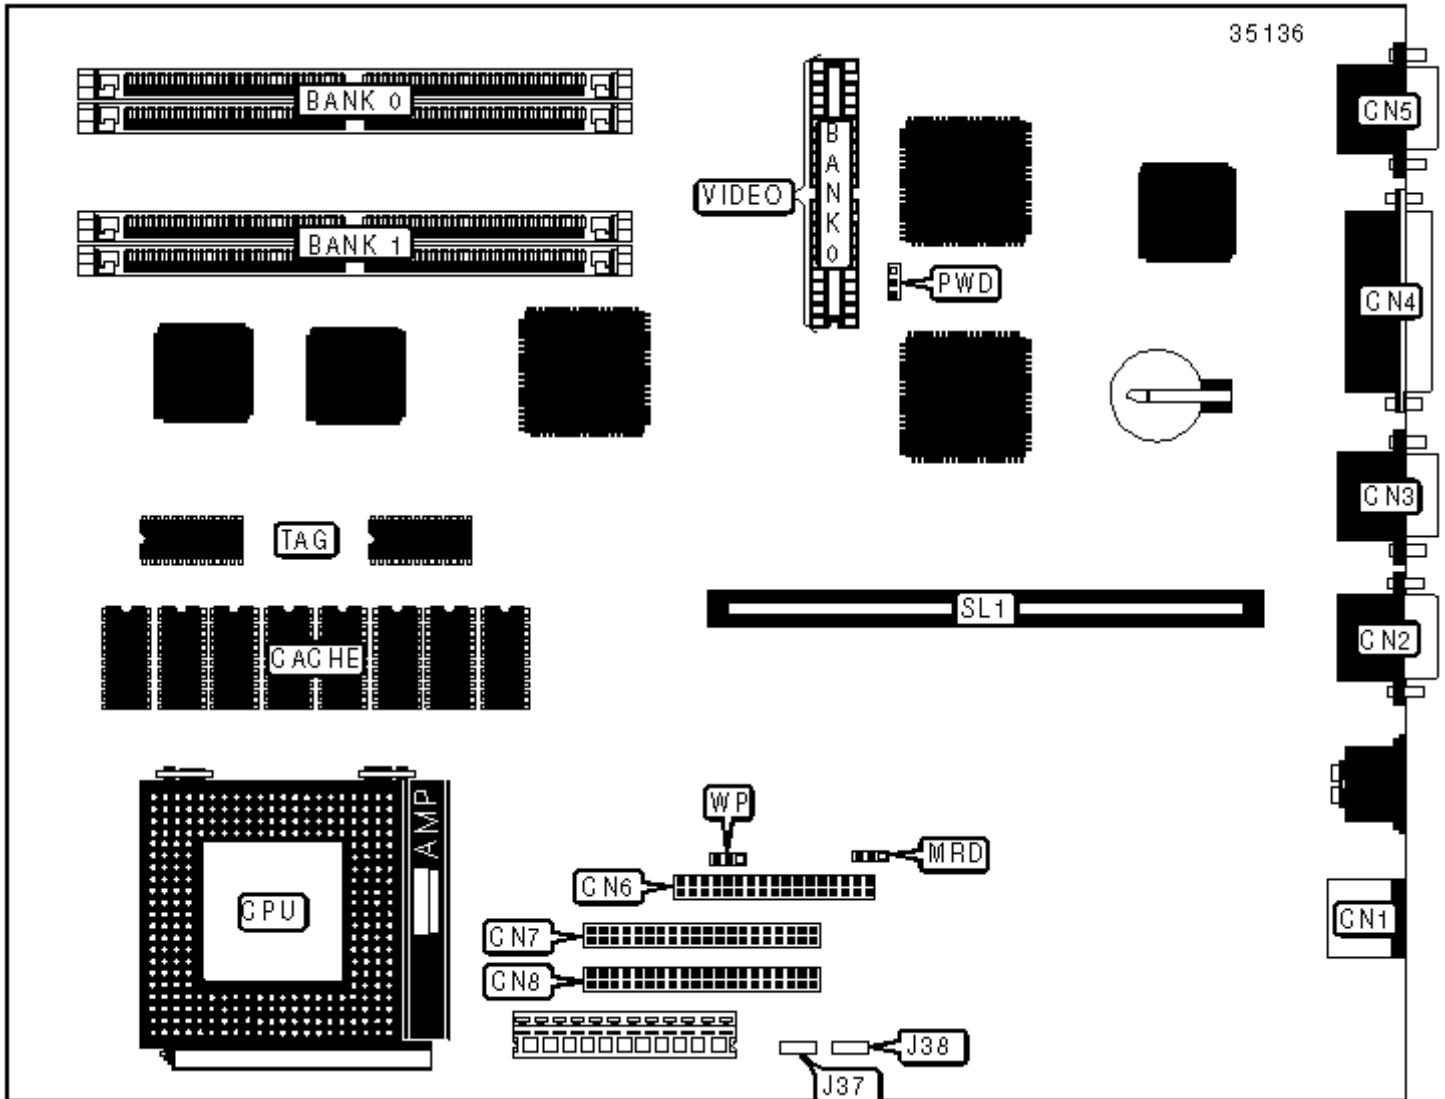

CONNECTIONS

Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	IDE interface	CN7
Serial port	CN2	IDE interface	CN8
Serial port	CN3	On/off switch connector	J37
Parallel port	CN4	On/off switch power supply connector	J38
VGA port	CN5	Riser slot	SL1
Floppy drive interface	CN6		

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Modem answers on ring	MRD	Pins 2 & 3 closed
Modem does not answer on ring	MRD	Pins 1 & 2 closed
Password normal operation	PWD	Pins 1 & 2 closed
Password clear	PWD	Pins 2 & 3 closed
» Floppy drive write protect disabled	WP	Pins 1 & 2 closed
Floppy drive write protect enabled	WP	Pins 2 & 3 closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
24MB	(2) 1M x 36	(2) 2M x 36
32MB	(2) 4M x 36	None

32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36


CACHE CONFIGURATION

Note: 256KB cache is factory installed and is not configurable.

VIDEO MEMORY CONFIGURATION

Size	Bank 0
1MB	(2) 256K x 16

Note: The maximum memory size is unidentified. This configuration is for an upgrade.

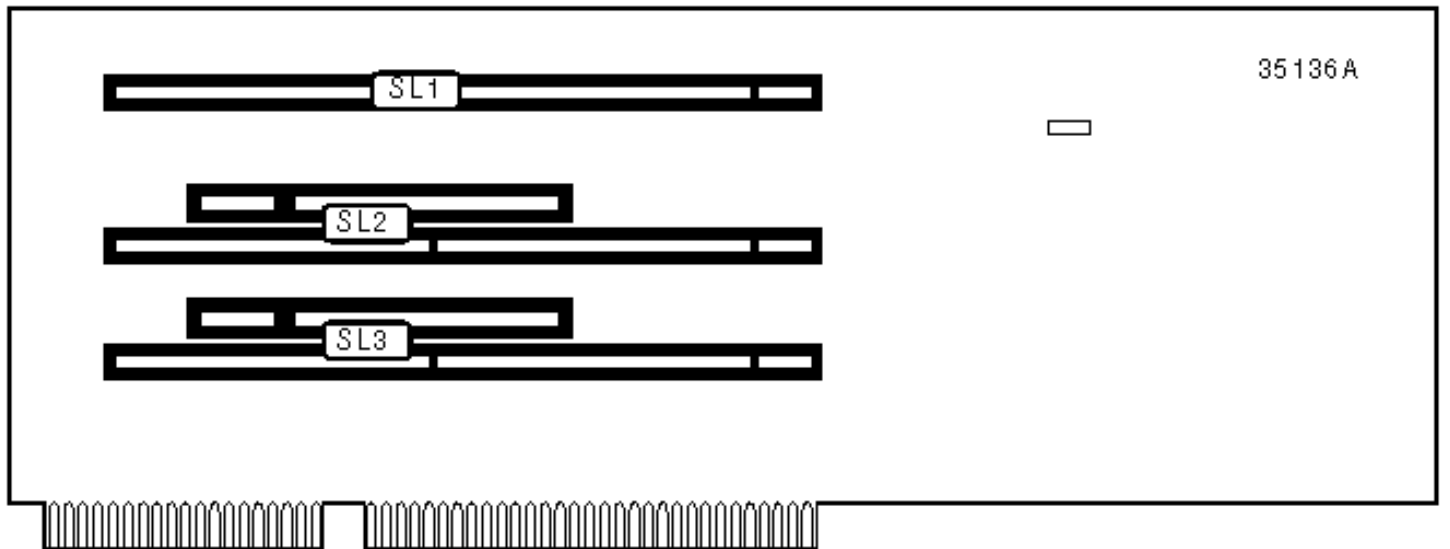

PC 330 (Type 6575) Riser Card

CONNECTIONS

Purpose	Location	Purpose	Location
ISA slot	SL1	Shared PCI/ISA slot	SL3
Shared PCI/ISA slot	SL2		