


EPOX COMPUTER CO., LTD.

EP-BXT

Device Type	Mainboard
Processor	Pentium II
Processor Speed	200/233/266/300/333/350/400/450MHz
Chip Set	Intel 440BX
Video Chip Set	Intel
Maximum Onboard Memory	768MB (EDO & SDRAM & PC100 supported)
Maximum Video Memory	8MB
Audio Chip Set	Yamaha
Cache	512KB (located on Pentium II CPU)
BIOS	Award
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (4), floppy drive interface, game/MIDI port, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, line in, line out, microphone in, audio in – CD-ROMs (3), wake on LAN connector

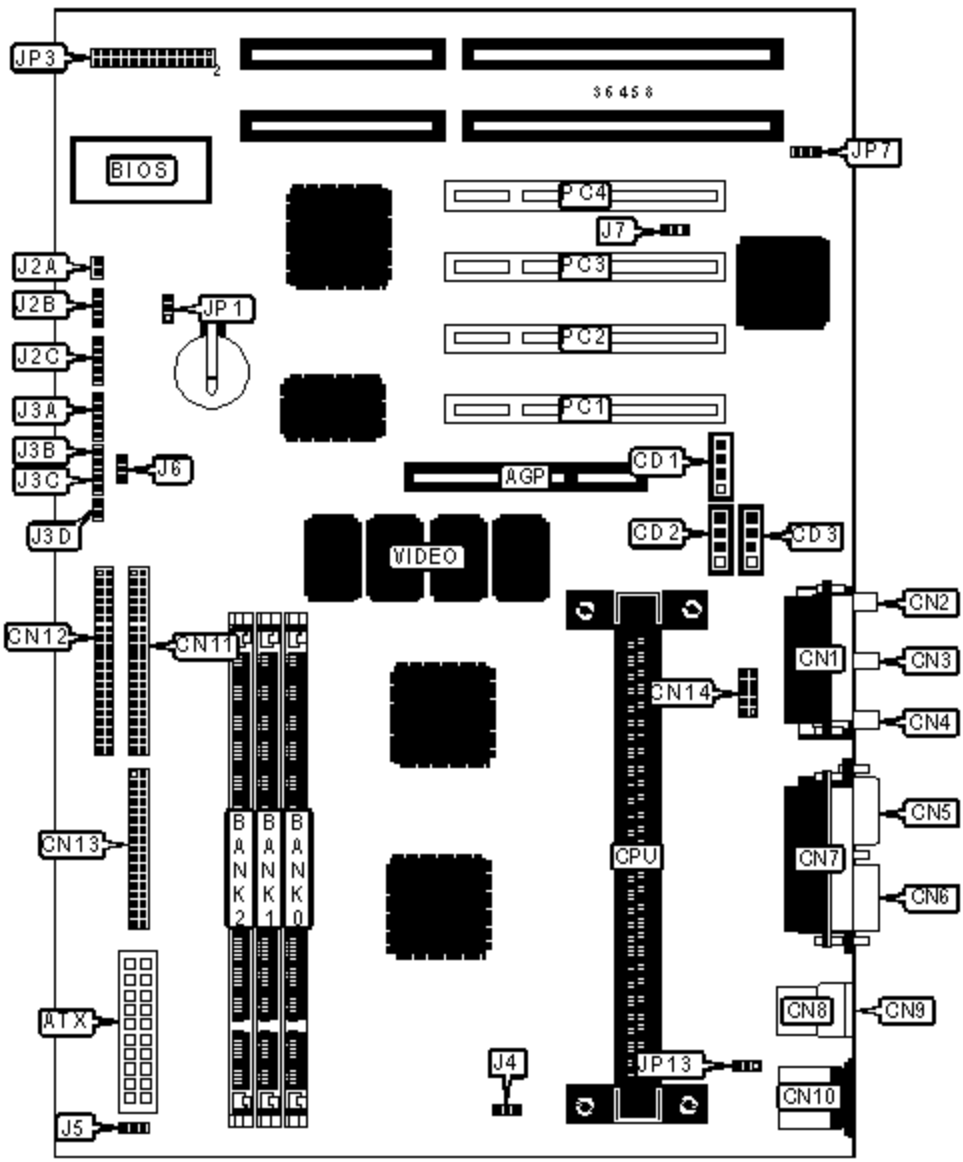

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	IDE interface 2	CN12

ATX power connector	ATX	Floppy drive interface	CN13
Audio in – CD-ROM	CD1	Serial port 2	CN14
Audio in – CD-ROM	CD2	Reset switch	J2A
Audio in – CD-ROM	CD3	Speaker	J2B
Game/MIDI port	CN1	Power LED & keylock	J2C
Microphone in	CN2	IR connector	J3A
Line in	CN3	IDE interface LED	J3B
Line out	CN4	Turbo LED	J3C
VGA port	CN5	Soft off power supply	J3D
Parallel port	CN6	CPU fan power	J4
Serial port 1	CN7	Power fan power	J5
USB connector 1	CN8	Chassis fan power	J6
USB connector 2	CN9	Wake on LAN connector	J7
PS/2 mouse port	CN10	32-bit PCI slots	PC1 – PC4
IDE interface 1	CN11		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	JP1	Pins 1 & 2 closed
	CMOS memory clear	JP1	Pins 2 & 3 closed
»	On board sound enabled	JP7	Pins 1 & 2 closed
	On board sound disabled	JP7	Pins 2 & 3 closed
»	Keyboard power on enabled	JP13	Pins 1 & 2 closed
	Keyboard power on disabled	JP13	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64

96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 32M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None

288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board accepts EDO & SDRAM & PC100 memory.

CACHE CONFIGURATION

Note: 512KB cache is located on the Pentium II CPU.

VIDEO MEMORY CONFIGURATION

Note: Video memory is factory installed and is not configurable.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JP3
200MHz	66MHz	3x	Pins 1 & 2, 15 & 16 closed
233MHz	66MHz	3.5x	Pins 3 & 4, 15 & 16 closed
266MHz	66MHz	4x	Pins 5 & 6, 15 & 16 closed
300MHz	66MHz	4.5x	Pins 7 & 8, 15 & 16 closed
333MHz	66MHz	5x	Pins 9 & 10, 15 & 16 closed
300MHz	100MHz	3x	Pins 1 & 2, 17 & 18 closed
350MHz	100MHz	3.5x	Pins 3 & 4, 17 & 18 closed

400MHz	100MHz	4x	Pins 5 & 6, 17 & 18 closed
450MHz	100MHz	4.5x	Pins 7 & 8, 17 & 18 closed

Note: Pins designated should be in the closed position.