


QDI COMPUTER, INC.

P6I440BX/D

Configuration

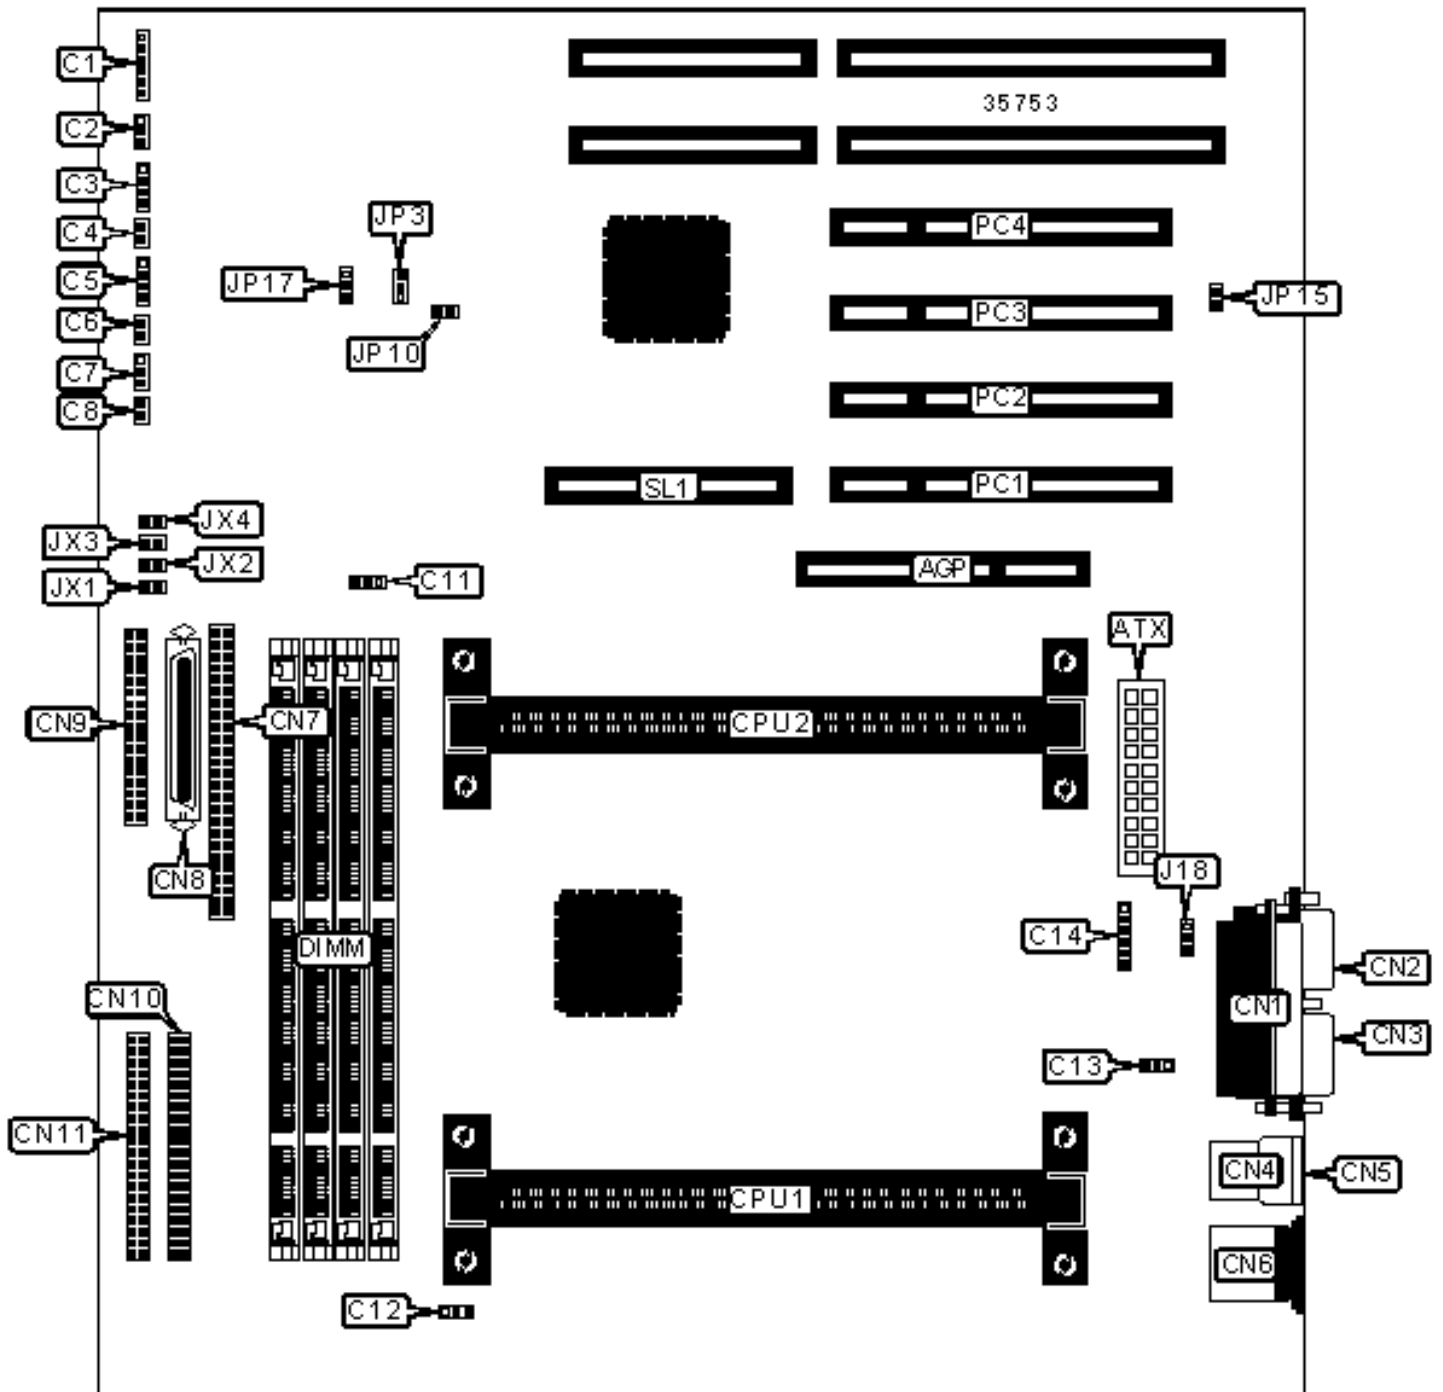

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Parallel port	CN1
ATX power connector	ATX	Serial port	CN2
IR connector	C1	Serial port	CN3
Bak fan power	C2	USB connector 1	CN4
IDE interface LED	C3	USB connector 2	CN5
Reset switch	C4	PS/2 mouse port	CN6
Speaker	C5	SCSI interface	CN7
Power LED & keylock	C6	Ultra Wide SCSI interface	CN8
Green PC LED	C7	Floppy drive interface	CN9
Green PC connector	C8	IDE interface	CN10
CPU fan power	C11	IDE interface	CN11
Chassis fan power	C12	Chassis intrusion connector	J18
Wake on modem connector	C13	32-bit PCI slots	PC1 – PC4
1/2 ATX power connector	C14	RAID slot	SL1

USER CONFIGURABLE SETTINGS

Function	Label	Position
» CMOS memory normal operation	JP3	Pins 2 & 3 closed
CMOS memory clear	JP3	Pins 1 & 2 closed
» On board LAN enabled	JP10	Closed
On board LAN disabled	JP10	Open
» On board SCSI enabled	JP15	Closed
On board SCSI disabled	JP15	Open

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2	Bank 3
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
72MB	(1) 8M x 64	(1) 1M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 16M x 64	None	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64

136MB	(1) 16M x 64	(1) 1M x 64	None	None
144MB	(1) 16M x 64	(1) 2M x 64	None	None
152MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None	None
176MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
224MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
272MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
280MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
304MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
352MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
448MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
640MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
1024MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
Note: Board accepts SDRAM memory.				

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JX1	JX2	JX3	JX4
233MHz	66MHz	3.5x	Open	Open	Closed	Closed
266MHz	66MHz	4x	Closed	Closed	Open	Closed
300MHz	66MHz	4.5x	Open	Closed	Open	Closed
333MHz	66MHz	5x	Closed	Open	Open	Closed
350MHz	100MHz	3.5x	Open	Open	Closed	Closed
400MHz	100MHz	4x	Closed	Closed	Open	Closed
450MHz	100MHz	4.5x	Open	Closed	Open	Closed

SCSI TERMINATION SELECTION

Setting		JP17
»	Auto termination enabled	Pins 2 & 3 closed
	Auto termination disabled	Open