


TEKRAM TECHNOLOGY CO., LTD.

P6B40D-A5

Configuration

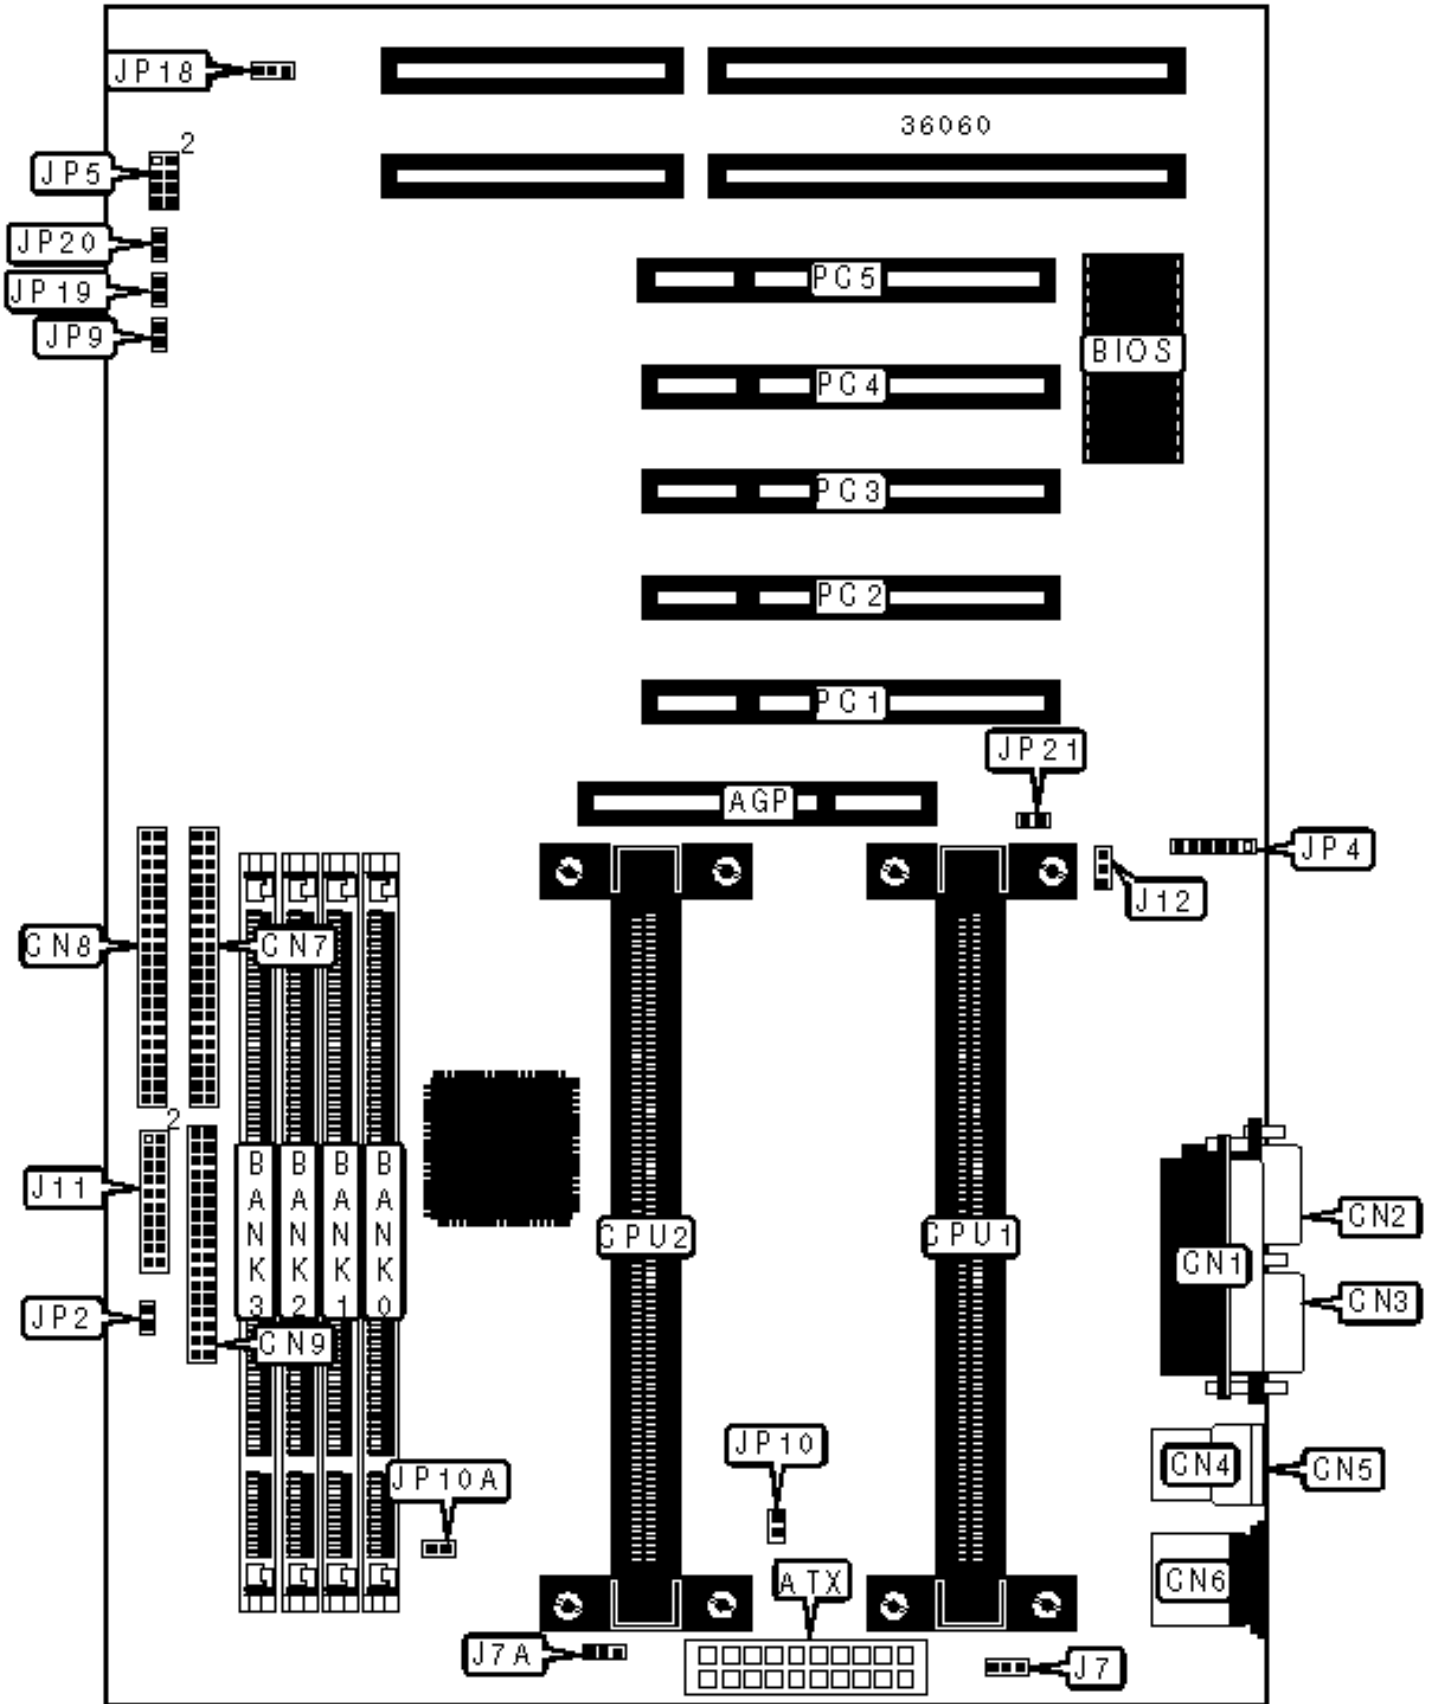

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Turbo LED	J11/pins 3 & 5
ATX power connector	ATX	Green PC connector	J11/pins 7 & 9
Parallel port	CN1	Speaker	J11/pins 14/16/18/20
Serial port 2	CN2	Reset switch	J11/pins 17 & 19
Serial port 1	CN3	Wake on LAN connector	J12
USB connector 1	CN4	IDE interface LED	JP2
USB connector 2	CN5	IR connector	JP4
PS/2 mouse port	CN6	Soft off power supply	JP9
Floppy drive interface	CN7	Temperature sensor	JP10
IDE interface 2	CN8	Temperature sensor	JP10A
IDE interface 1	CN9	Chassis fan power	JP18
Chassis fan power	J7	Chassis intrusion	JP20
Chassis fan power	J7A	32-bit PCI slots	PC1 - PC5
Power LED & keylock	J11/pins 2/4/6/8/10		

USER CONFIGURABLE SETTINGS

Function	Label	Position
Power state function enabled	JP19	Closed
Power state function disabled	JP19	Open

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None

16MB	(1) 1M x 64	(1) 1M x 64	None	None
24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
72MB	(1) 8M x 64	(1) 1M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 16M x 64	None	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None	None

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2	Bank 3
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
136MB	(1) 16M x 64	(1) 1M x 64	None	None
144MB	(1) 16M x 64	(1) 2M x 64	None	None
176MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None	None

192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 32M x 64	None	None	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
272MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
280MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
448MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
640MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
1024MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64
Note: Board accepts EDO & SDRAM memory.				

CACHE CONFIGURATION

256KB/512KB cache is located on the Pentium II CPU. 128KB cache is located on the Celeron 300A & 333 C

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JP5	JP21
233MHz	66MHz	3.5x	1 & 2, 7 & 8	Closed
266MHz	66MHz	4x	1 & 2, 3 & 4, 5 & 6	Closed
300MHz	66MHz	4.5x	1 & 2, 5 & 6	Closed
333MHz	66MHz	5x	1 & 2, 3 & 4	Closed

366MHz	66MHz	5.5x	1 & 2	Closed
350MHz	100MHz	3.5x	1 & 2, 7 & 8	Open
400MHz	100MHz	4x	1 & 2, 3 & 4, 5 & 6	Open
450MHz	100MHz	4.5x	1 & 2, 5 & 6	Open
500MHz	100MHz	5x	1 & 2, 3 & 4	Open
550MHz	100MHz	5.5x	1 & 2	Open

Note: Pins designated should be in the closed position.