


**TEKRAM TECHNOLOGY CO., LTD.**

**P6L40-A4E**

**Configuration**

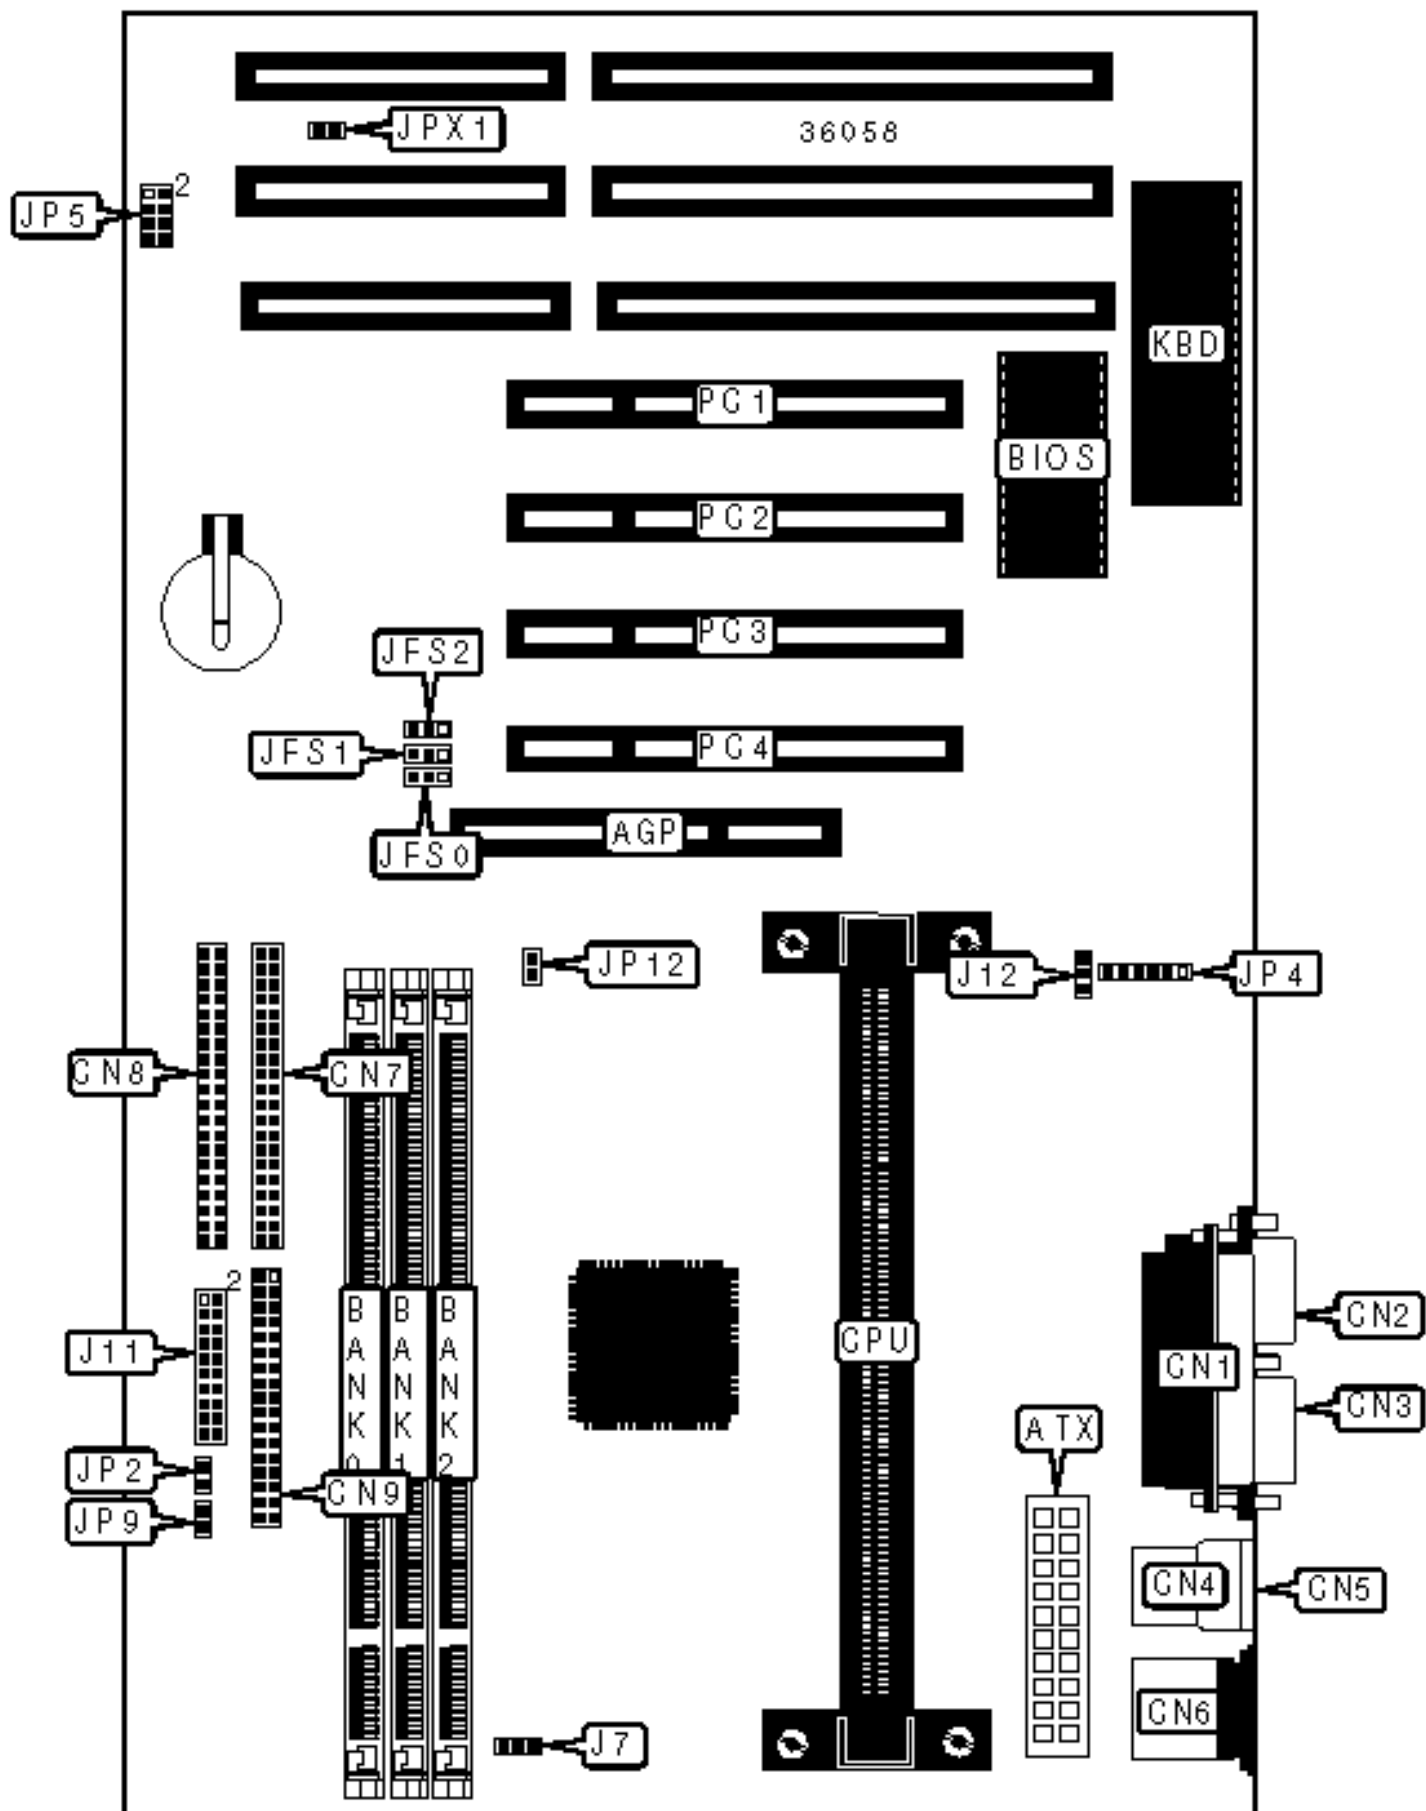

## CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Power LED & keylock	J11/pins 2/4/6/8/10
ATX power connector	ATX	Turbo LED	J11/pins 3 & 5
Parallel port	CN1	Green PC connector	J11/pins 7 & 9
Serial port 2	CN2	Speaker	J11/pins 14/16/18/20
Serial port 1	CN3	Reset switch	J11/pins 17 & 19
USB connector 1	CN4	Wake on LAN connector	J12
USB connector 2	CN5	IDE interface LED	JP2
PS/2 mouse port	CN6	IR connector	JP4
Floppy drive interface	CN7	Soft off power supply	JP9
IDE interface 2	CN8	Temperature sensor connector	JP12
IDE interface 1	CN9	32-bit PCI slots	PC1 - PC4
Chassis fan power	J7		

## USER CONFIGURABLE SETTINGS

Function	Label	Position
Power state function enabled	JPX1	Closed
Power state function disabled	JPX1	Open

## DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None

24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64

### DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64

112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
Note: Board accepts EDO & SDRAM memory.			

**CACHE CONFIGURATION**

Note: 256KB/512KB cache is located on the Pentium II CPU.

### CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JFS0	JFS1	JFS2	JP5
233MHz	66MHz	3.5x	1 & 2	1 & 2	1 & 2	1 & 2, 7 & 8
266MHz	66MHz	4x	1 & 2	1 & 2	1 & 2	1 & 2, 3 & 4, 5 & 6
300MHz	66MHz	4.5x	1 & 2	1 & 2	1 & 2	1 & 2, 5 & 6
333MHz	66MHz	5x	1 & 2	1 & 2	1 & 2	1 & 2, 3 & 4
366MHz	66MHz	5.5x	1 & 2	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.