


Achi-154 Quickly guide

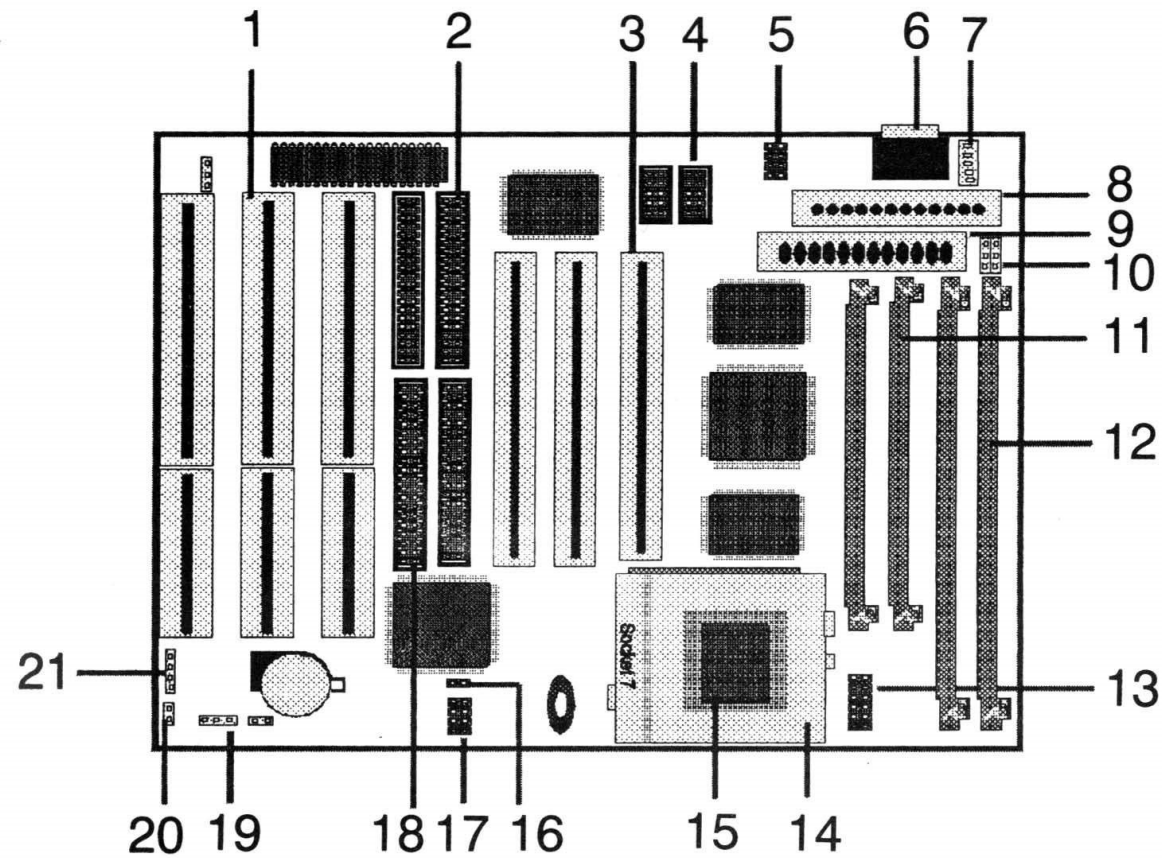

- | | |
|----------------------------------|---------------------------------------|
| 1. 3 x ISA Slots | 12. 2 x DIMM sockets |
| 2. LPT/FDD Ports | 13. SW1: CPU clock Jumper |
| 3. 3 x PCI Slots | 14. ZIF socket 7 |
| 4. COM1 / 2 | 15. 64x64 512K Pipeline SRAM |
| 5. USB connector | 16. JP7 ATX: ON, AT: OFF. |
| 6. AT K/B connector | 17. JP6 CPU Voltage |
| 7. PS/2 Mouse connector | 18. Dual Bus Master IDE ports |
| 8. AT power connector | 19. JP1(RTC)/ 1-2:normal
2-3:clear |
| 9. ATX power connector option | 20. ATX Switch : ON/OFF |
| 10. JP3 / 4: DRAM Voltage Jumper | 21. IrDA connector |
| 11. 2 x SIMM sockets | |

1. CPU Bus Clock Jumper Setting(SW1)

CPU(MHz)	BUS	Mult	1	2	3	4	5	6
Intel 133	66	2.0			Short	Short		Short
Intel 150	60	2.5		Short	Short	Short	Short	
Intel 166	66	2.5		Short	Short	Short		Short
Intel 200	66	3.0		Short		Short		Short
Intel MMX 166	66	2.5		Short	Short	Short		Short
Intel MMX 200	66	3.0		Short		Short		Short
Intel MMX 233	66	3.5				Short		Short
Cyrix 686L-P133+	60	2.0			Short	Short	Short	Short
Cyrix 686L-P166+	66	2.0			Short	Short		Short
Cyrix 686L-P200+	75	2.0			Short		Short	
Cyrix MX 166M	66	2.0			Short	Short		Short
Cyrix MX 200M	66	2.5		Short	Short	Short		Short
Cyrix MX 233M	66	3.0		Short		Short		Short
Cyrix MX 266M	66	3.5				Short		Short
AMD K5-PR133	66	2.0			Short	Short		Short
AMD K5-PR166	66	2.5		Short	Short	Short		Short
AMD K5-PR200	66	3.0		Short		Short		Short
AMD K6-166	66	2.5		Short	Short	Short		Short
AMD K6-200	66	3.0		Short		Short		Short
AMD K6-233	66	3.5				Short		Short

2.CPU Voltage Setting(JP6)

Voltage	1	2	3	4
2.0V	Open	Open	Open	Open
2.1V	Short	Open	Open	Open
2.2V	Open	Short	Open	Open
2.3V	Short	Short	Open	Open
2.4V	Open	Open	Short	Open
2.5V	Short	Open	Short	Open
2.6V	Open	Short	Short	Open
2.7V	Short	Short	Short	Open
2.8V	Open	Open	Open	Short
2.9V	Short	Open	Open	Short
3.0V	Open	Short	Open	Short
3.1V	Short	Short	Open	Short
3.2V	Open	Open	Short	Short
3.3V	Short	Open	Short	Short
3.4V	Open	Short	Short	Short
3.5V	Short	Short	Short	Short

3.DRAM Voltage Setting(JP3/JP4) 3.3V: 2-3 5.0V: 1-2

