


# J-MARK COMPUTER CORPORATION

## J-7XCS

<b>Device Type</b>	Mainboard
<b>Processor</b>	Pentium II
<b>Processor Speed</b>	233/266/300/333MHz
<b>Chip Set</b>	Intel 440LX/EX
<b>Maximum Onboard Memory</b>	768MB (EDO & SDRAM supported)
<b>Audio Chip Set</b>	CMI
<b>Cache</b>	256/512KB (located on Pentium II CPU)
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	245mm x 230mm
<b>I/O Options</b>	32-bit PCI slots (2), floppy drive interface, game/MIDI port, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connectors (2), ATX power connector, AGP slot, audio in – CD-ROMs (2)

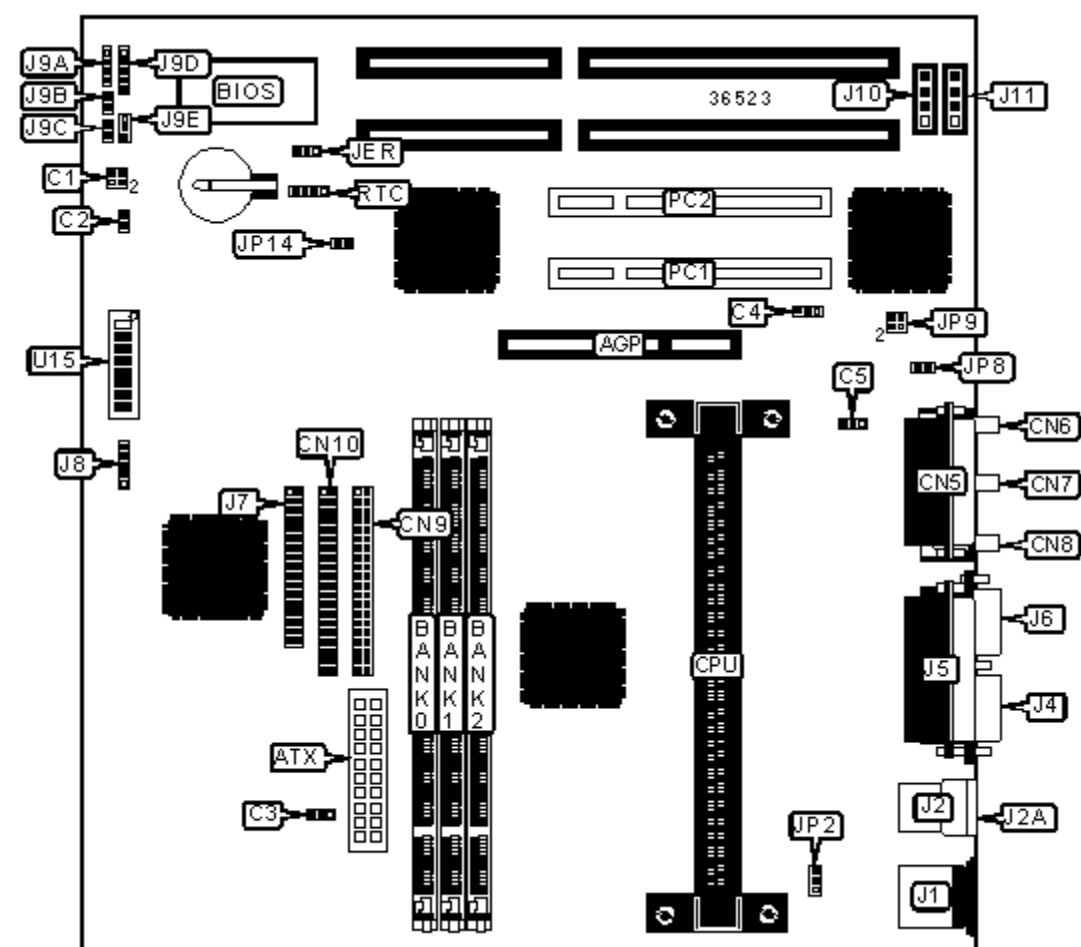

### CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	USB connector 2	J2A
ATX power connector	ATX	Serial port 1	J4
IDE interface LED	C1/pins 1 & 3	Parallel port	J5
	C4/pins 2 & 4		J6

Green PC connector	C1/pins 2 & 4	Serial port 2	J6
Soft off power supply	C2	Floppy drive interface	J7
Chassis fan power	C3	IR connector	J8
Chassis fan power	C4	Speaker	J9A
CPU fan power	C5	Reset switch	J9B
Game/MIDI port	CN5	Turbo LED	J9C
Microphone in	CN6	Power LED & keylock	J9D
Line in	CN7	Turbo switch	J9E
Line out	CN8	Audio in – CD-ROM	J10
IDE interface 2	CN9	Audio in – CD-ROM	J11
IDE interface 1	CN10	Digital audio out	JP9/pins 1 & 2
PS/2 mouse port	J1	Digital audio in	JP9/pins 3 & 4
USB connector 1	J2	32-bit PCI slots	PC1 – PC2

### USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	JER	Unidentified
»	Factory configured - do not alter	JP2	Unidentified
»	Factory configured - do not alter	JP8	Unidentified
»	Factory configured - do not alter	JP14	Unidentified
»	CMOS memory normal operation	RTC	Pins 2 & 3 closed
	CMOS memory clear	RTC	Pins 3 & 4 closed
»	Factory configured - do not alter	U15/8	Off

### DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None

24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None

### DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None

136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 32M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board accepts EDO & SDRAM memory.

**CACHE CONFIGURATION**

Note: 256KB/512KB cache is located on the Pentium II CPU.

**CPU SPEED SELECTION**

CPU speed	Clock speed	Multiplier	U15/1	U15/2	U15/3
233MHz	66MHz	3.5x	On	On	Off
266MHz	66MHz	4x	On	Off	On
300MHz	66MHz	4.5x	On	Off	Off
333MHz	66MHz	5x	On	Off	On

**CPU SPEED SELECTION (CON'T)**

CPU speed	Clock speed	Multiplier	U15/4	U15/5	U15/6	U15/7
233MHz	66MHz	3.5x	Off	Off	Off	Off
266MHz	66MHz	4x	On	Off	Off	Off
300MHz	66MHz	4.5x	On	Off	Off	Off
333MHz	66MHz	5x	Off	Off	Off	Off