




## Maintenance and Service Guide Compaq Presario 5300 Series Computers

- [Home](#)     
 [Product Description](#)     
 [Troubleshooting](#)     
 [Illustrated Parts Catalog](#)  
[Removal & Replacement](#)     
 [Jumper & Switch Information](#)     
 [Specifications](#)

### JUMPER & SWITCH INFORMATION

1	Frequency Jumper
2	CPU Core Voltage Select
3	CMOS Battery
4	CMOS
5	Secondary IDE Drive
5a	Primary IDE Drive
6	Diskette Drive
7	Fan
8	Fan
9	Button Board
10	Front I/O Panel
11	ISA Slot
12	CD Audio
13	PCI Slots
14	Power
15	Processor
16	Processor Multiple
17	Memory DIMM
18	Mouse
19	Keyboard
20	USB
21	VGA Connector
22	Parallel Port
23	Microphone
24	Line In
25	Speaker
26	Serial Port

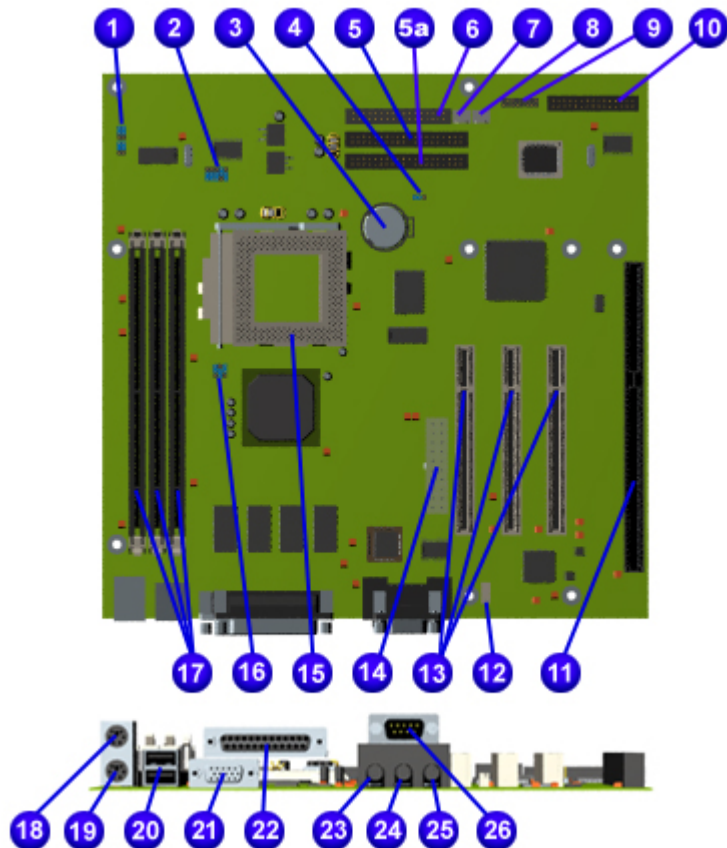

### Jumper Settings for models 5330, 5333, 5340, 5345, 5360, 5363, 5365

BF2	BF1	BF0	AMD
1-2	1-2	1-2	3.5X

1-2	1-2	2-3	2.0X
1-2	2-3	1-2	3.0X
1-2	2-3	2-3	2.5X
2-3	1-2	1-2	5.5X
2-3	1-2	2-3	4.0X
2-3	2-3	1-2	5.0X
2-3	2-3	2-3	4.5X

### JP5

Vid4	Vid3	Vid2	Vid1	Vid0	CPU Vcore
1-2	1-2	2-3	1-2	2-3	1.80V
1-2	1-2	2-3	1-2	1-2	1.85V
1-2	1-2	1-2	2-3	2-3	1.90V
1-2	1-2	1-2	2-3	1-2	1.95V
1-2	1-2	1-2	1-2	2-3	2.00V
1-2	1-2	1-2	1-2	1-2	2.05V
2-3	2-3	2-3	2-3	2-3	NO CPU
2-3	2-3	2-3	2-3	1-2	2.1V
2-3	2-3	2-3	1-2	2-3	2.2V
2-3	2-3	2-3	1-2	1-2	2.3V
2-3	2-3	1-2	2-3	2-3	2.4V
2-3	2-3	1-2	2-3	1-2	2.5V
2-3	2-3	1-2	1-2	2-3	2.6V
2-3	2-3	1-2	1-2	1-2	2.7V
2-3	1-2	2-3	2-3	2-3	2.8V
2-3	1-2	2-3	2-3	1-2	2.9V
2-3	1-2	2-3	1-2	2-3	3.0V
2-3	1-2	2-3	1-2	1-2	3.1V
2-3	1-2	1-2	2-3	2-3	3.2V
2-3	1-2	1-2	2-3	1-2	3.3V
2-3	1-2	1-2	1-2	2-3	3.4V
2-3	1-2	1-2	1-2	1-2	3.5V

### W179H

FREQ3	FREQ2	FREQ1	FREQ0	CPU	SDRAM	PCI
2-3	2-3	2-3	2-3	90	90	CPU/3
2-3	2-3	2-3	1-2	83.3	55.53	CPU/2.5

2-3	2-3	1-2	2-3	95.25	63.5	CPU/3
2-3	2-3	1-2	1-2	66.8	100	CPU/2
2-3	1-2	2-3	2-3	105	105	CPU/3
2-3	1-2	2-3	1-2	112	74.67	CPU/3
2-3	1-2	1-2	2-3	124	82.67	CPU/4
2-3	1-2	1-2	1-2	133.3	88.9	CPU/4
1-2	2-3	2-3	2-3	66.8	66.8	CPU/2
1-2	2-3	2-3	1-2	75	75	CPU/2.5
1-2	2-3	1-2	2-3	83.3	83.3	CPU/2.5
1-2	2-3	1-2	1-2	95.25	95.25	CPU/3
1-2	1-2	2-3	2-3	100.2	100.2	CPU/3
1-2	1-2	2-3	1-2	112	112	CPU/3
1-2	1-2	1-2	2-3	100.0	66.8	CPU/3
1-2	1-2	1-2	1-2	90	60	CPU/3

*1.800.At.COMPAQ*

[privacy and legal statement](#)