


ENPC TECHNOLOGY CORPORATION

ML-21 (VER. A)

Device Type	Mainboard
Processor	Celeron
Processor Speed	300/333MHz
Chip Set	Intel 440LX
Maximum Onboard Memory	384MB (SDRAM supported)
Cache	0/128KB (Located on the Celeron CPU)
BIOS	Award
Dimensions	305mm x 190mm
I/O Options	32-bit PCI slots (4), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB ports (2), ATX power connector, AGP slot, Wake-on-LAN connector

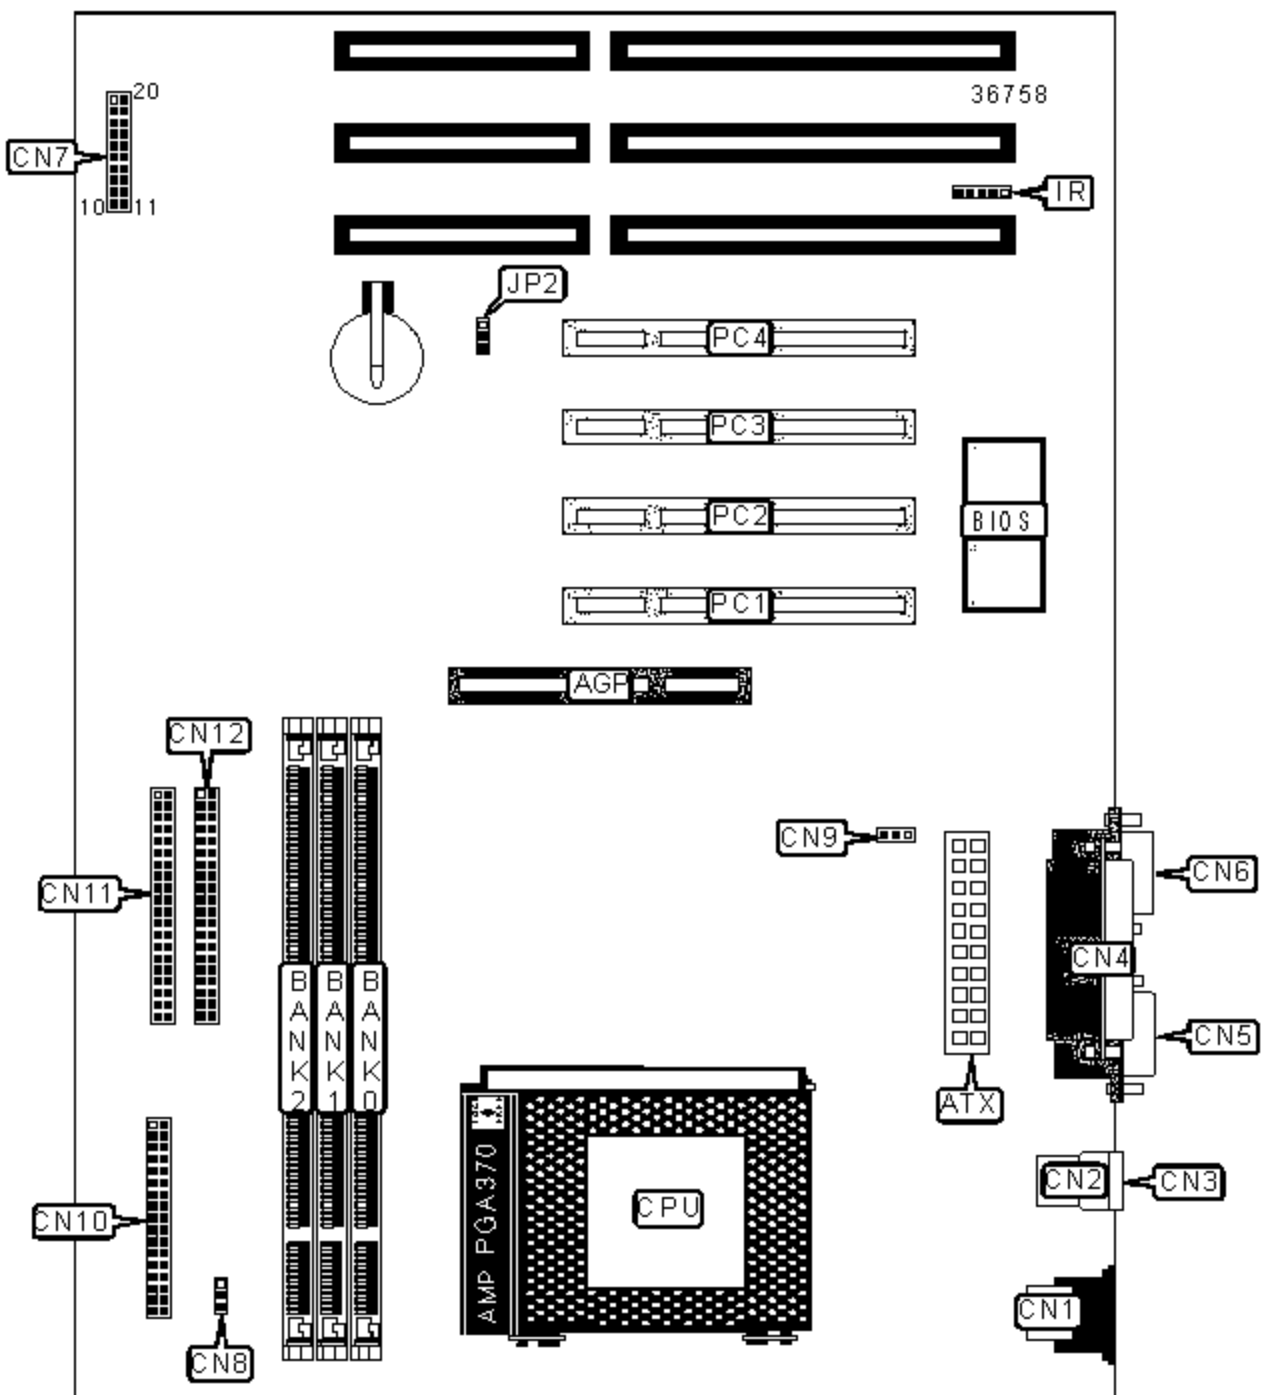

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	IDE interface LED	CN7/Pins 9 & 10
ATX power connector	ATX	Speaker	CN7/Pins 11-14
PS/2 mouse port	CN1	Power LED & keylock	CN7/Pins 15-19
USB port 1	CN2	CPU fan power	CN8
USB port 2	CN3	Wake on LAN connector	CN9
Parallel port	CN4	Floppy drive interface	CN10
Serial port 2	CN5	IDE interface 1	CN11
Serial port 1	CN6	IDE interface 2	CN12
Reset switch	CN7/Pins 1 & 2	IR connector	IR
Power switch	CN7/Pins 5 & 6	32-bit PCI slots	PC1 - PC4
Turbo LED	CN7/Pins 7 & 8		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	JP2	Pins 1 & 2 closed
	CMOS memory clear	JP2	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64

48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

Note: Board supports SDRAM memory.

CACHE CONFIGURATION

Note: 128KB cache is located on the Celeron 300A and greater CPUs.