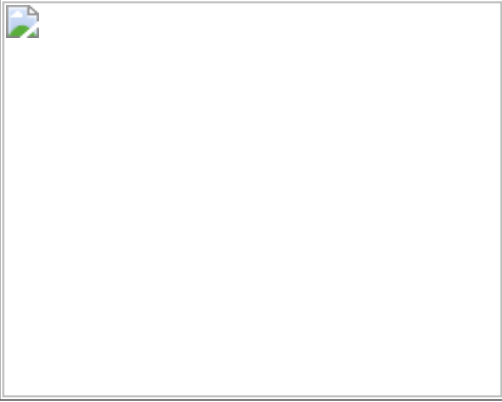


<b>JJ-151A</b>	
	<b>ISA 586/6x86 CPU Card With VGA/LAN (133-550MHz CPU)</b>
<b>Specifications:</b>	
<b>CPU Type:</b>	Intel, AMD, Cyrix, P54C/55C, K5/K6/K6-2/K6-3, M1/M2 MMX
<b>CPU Voltage:</b>	2.2/2.3/2.4/2.8/2.9/3.2/3.3/3.5V
<b>CPU Frequency:</b>	133~550MHz
<b>Power Requirement:</b>	+5V and +12V
<b>DRAM:</b>	Up to 256MB, w/ one 168-pin DIMM sockets
<b>Cache:</b>	L1 Cache depended on CPU L2 Cache: 256KB
<b>BIOS:</b>	Award PnP BIOS, Flash ROM, w/ VGA BIOS
<b>S/IO Setup:</b>	By software configuration
<b>IDE Interface:</b>	One Enhanced IDE, support 2 devices
<b>FDD Interface:</b>	Supports up to two floppy disk drives
<b>Serial Port:</b>	Two 16550 UART, COM2 selectable for RS232/422/485
<b>Parallel Port:</b>	Bi-directional; Supports SPP/EPP/ECP.
<b>Watchdog:</b>	16 level Watchdog Timer
<b>SSD:</b>	32-pin DOC socket supports up to 144MB
<b>CMOS:</b>	Real Time Clock/Calendar
<b>Keyboard:</b>	Mini DIN connector and external connector
<b>Mouse:</b>	Mini DIN connector (selectable w/ Keyboard)
<b>Speaker:</b>	Internal buzzer and external speaker connector
<b>LAN:</b>	RTL 8139, 10 BaseT/100 BaseTx Ethernet
<b>VGA:</b>	C&T; 69000 for CRT & LCD (STN/TFT/EL).
<b>Bus Interface:</b>	ISA Bus
<b>Green Function:</b>	controlled by hardware and software
<b>Dimension:</b>	185mm x 122mm
<b>Ordering Information:</b>	
<b>JJ-151A</b>	
<b>ISA 586/6x86 Card With VGA/LAN</b>	

[Menu](#)