


COMPAQ COMPUTER CORPORATION

PROLIANT 1850R

Device Type	Mainboard
Processor	Pentium II/Pentium III (2)
Processor Speed	400/450/500MHz
Chip Set	Intel 440BX
Video Chip Set	Unidentified
Maximum Onboard Memory	1024MB (SDRAM supported)
Maximum Video Memory	1MB
Cache	256/512KB (located on the Pentium II/III CPU)
BIOS	Unidentified
Dimensions	Unidentified
I/O Options (Mainboard)	Ethernet 10BaseT connector, floppy drive interface, IDE interfaces (2), SCSI interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot, VRM connectors (2), USB ports (2), ATX power connector
I/O Options (Riser board)	32-bit PCI slots (4),

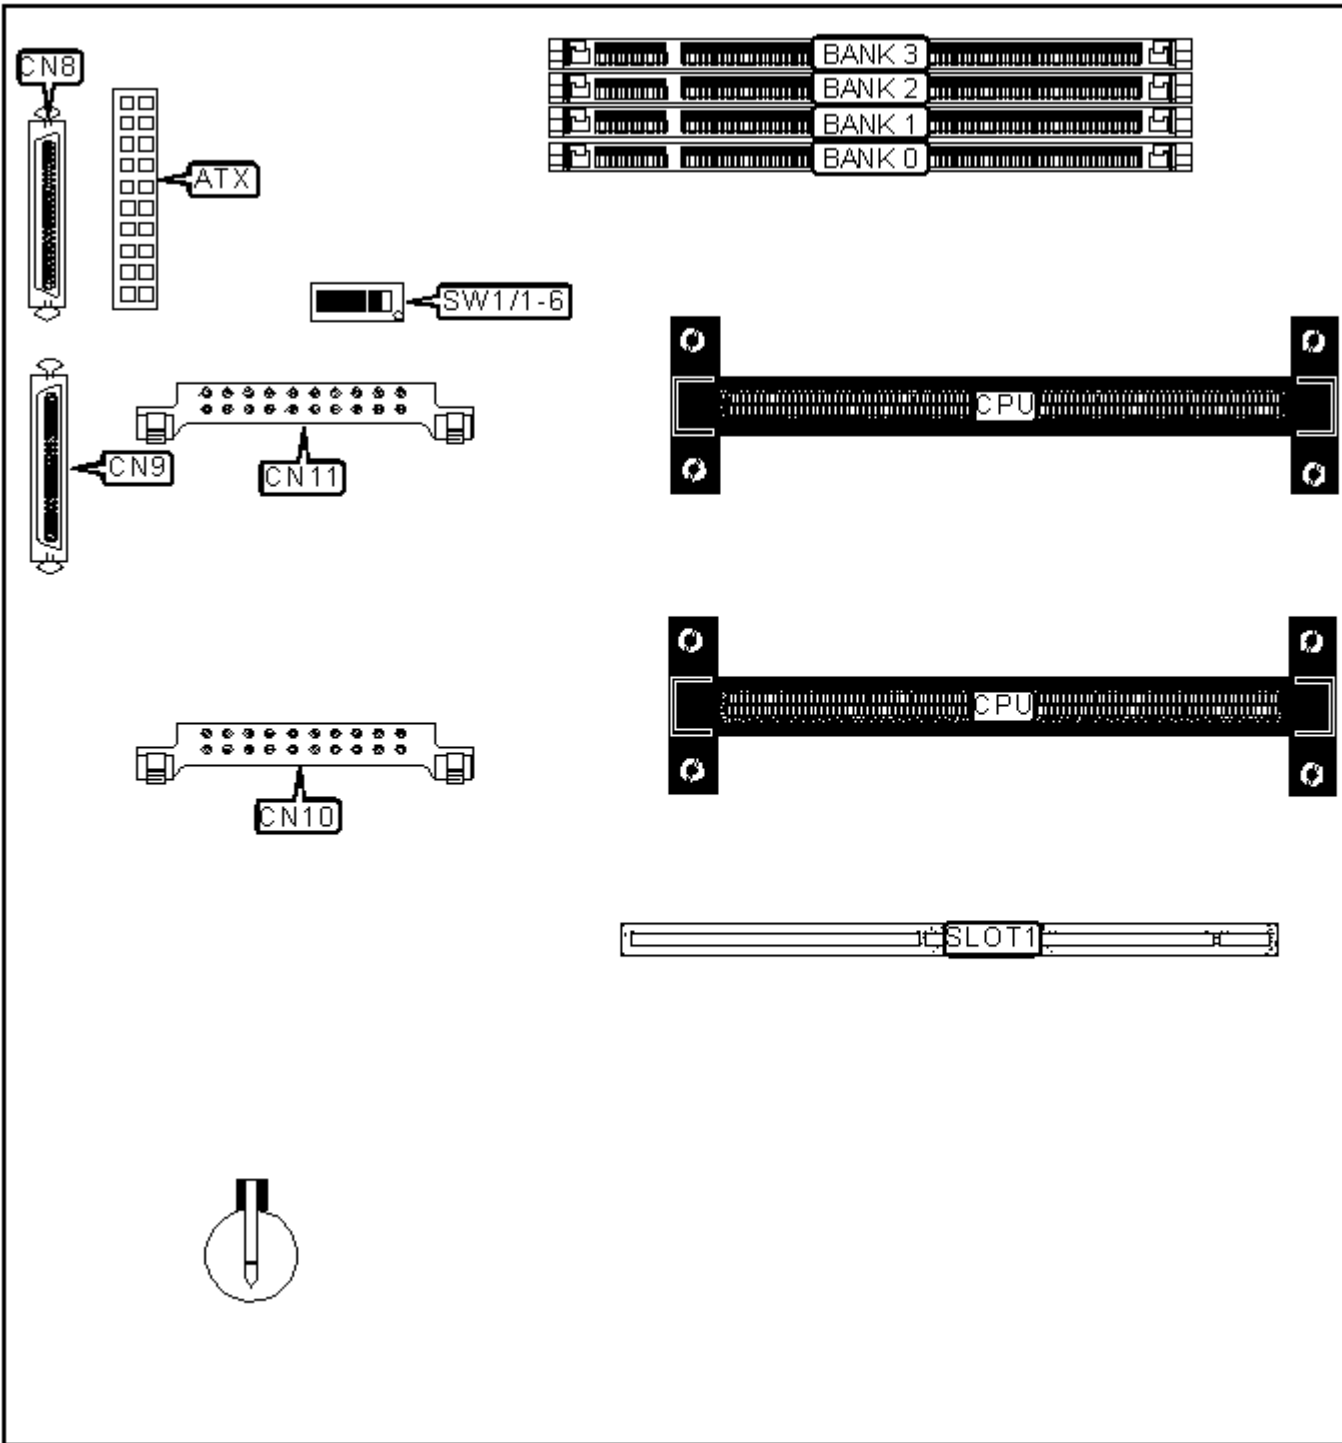

CONNECTIONS

Purpose	Location	Purpose	Location
ATX power connector	ATX	PS/2 mouse port	CN7
Ethernet 10BaseT connector	CN1	SCSI connector	CN8
VGA port	CN2	SCSI connector	CN9
Fast SCSI-2 port	CN3	VRM connector	CN10
Parallel port	CN4	VRM connector	CN11

Serial port 2	CN5	Riser Slot	Slot1
Serial port 1	CN6		

USER CONFIGURABLE SETTINGS

Function		Label	Position
	On board video disabled	SW1/1	On
	On board video enabled	SW1/1	Off
	System configuration locked	SW1/2	On
	System configuration unlocked	SW1/2	Off
»	Rack mount configuration	SW1/3	On
	Tower configuration	SW1/3	Off
»	Boot from diskette determined by configuration	SW1/4	Off
	Boot from diskette allowed	SW1/4	On
»	Password enabled	SW1/5	Off
	Password disabled	SW1/5	On
»	Normal mode	SW1/6	Off
	Maintenance mode	SW1/6	On

DIMM CONFIGURATION


Size	Bank 0	Bank 1	Bank 2	Bank 3
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 16M x 64	None	None	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64

256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 32M x 64	None	None	None
272MB	(1) 16M x 64	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 16M x 64	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 16M x 64	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None	None
528MB	(1) 32M x 64	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
544MB	(1) 32M x 64	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
576MB	(1) 32M x 64	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
640MB	(1) 32M x 64	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
1024MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board supports SDRAM memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II/Pentium III CPU.

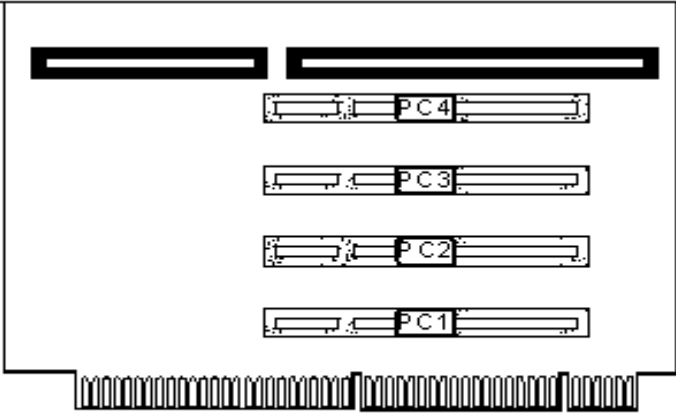

RISER CARD

CONNECTIONS	
Purpose	Location
32-bit PCI slots	PC1-PC4