


**PC WARE INTERNATIONAL, INC.**

MB-761

<b>Device Type</b>	Mainboard
<b>Processor</b>	Pentium II/Celeron
<b>Processor Speed</b>	233/266/300/333/350/366/400/450/500MHz
<b>Chip Set</b>	Intel 440BX
<b>Audio Chip Set</b>	Sound Pro
<b>Maximum Onboard Memory</b>	768MB (EDO & SDRAM & PC100 supported)
<b>Cache</b>	0/128/256/512KB (located on the CPU)
<b>BIOS</b>	AMI
<b>Dimensions</b>	305mm x 244mm
<b>I/O Options</b>	32-bit PCI slots (3), floppy drive interface, game/MIDI port, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB ports (2), ATX power connector, AGP slot, line in, line out, microphone in, audio in – CD-ROMs (2), SB-link connector, Wake-on-LAN connector

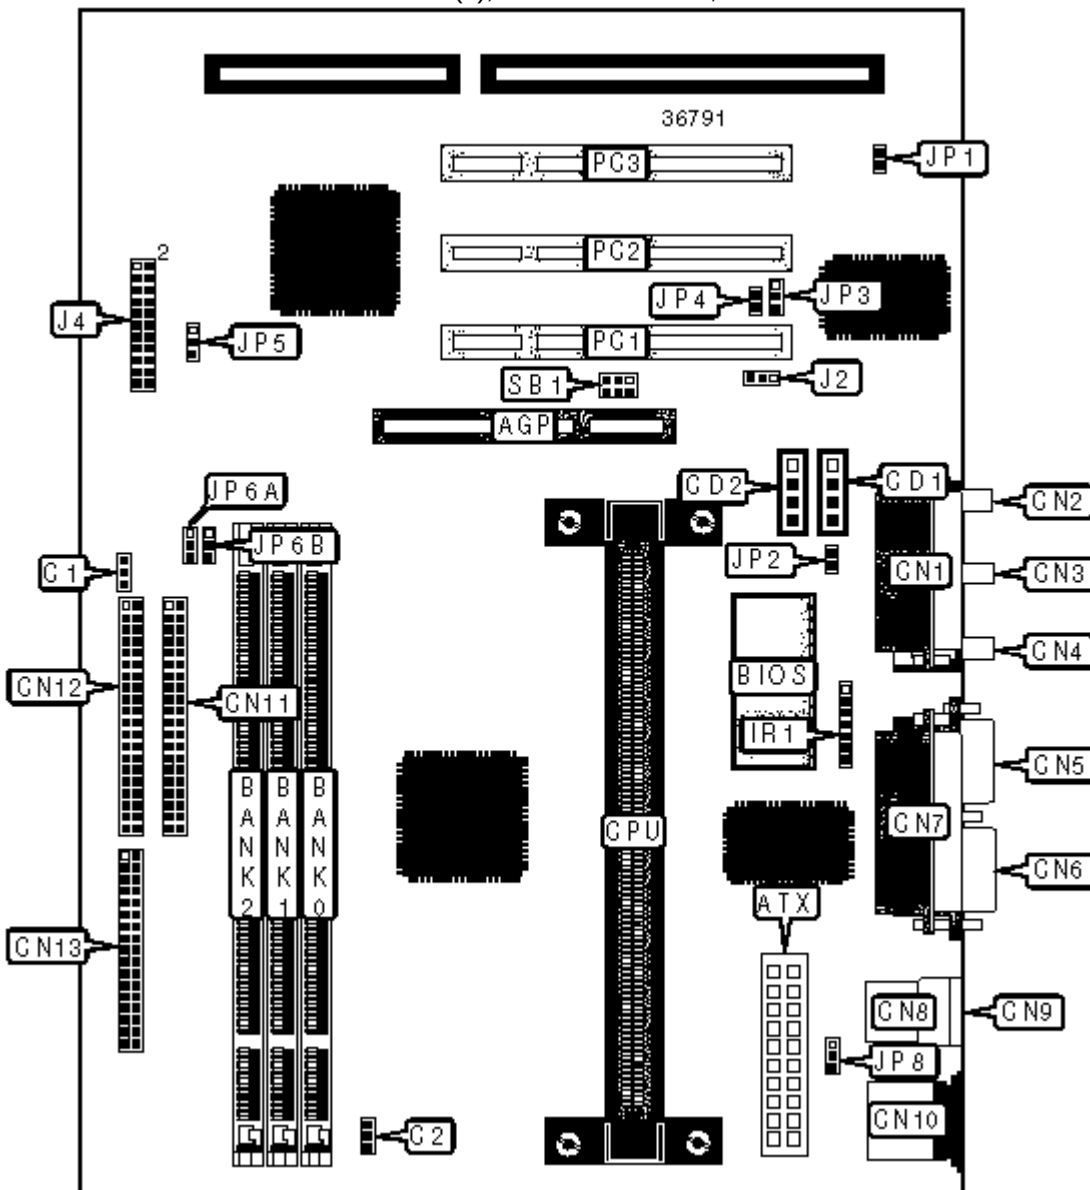

**CONNECTIONS**

Purpose	Location	Purpose	Location
---------	----------	---------	----------

AGP slot	AGP	PS/2 mouse port	CN10
ATX power connector	ATX	IDE interface 2	CN11
Fan power	C1	IDE interface 1	CN12
Fan power	C2	Floppy drive interface	CN13
Audio in – CD-ROM	CD1	IR connector	IR1
Audio in – CD-ROM	CD2	Wake-on-LAN connector	J2
Game/MIDI port	CN1	Speaker	J4/pins 1, 3, 5 & 7
Line out	CN2	Power LED & keylock	J4/pins 2, 4, 6, 8 & 10
Microphone in	CN3	IDE interface LED	J4/pins 15 & 16
Line in	CN4	Reset switch	J4/pins 17 & 18
Serial port 2	CN5	Power switch	J4/pins 21 & 22
Serial port 1	CN6	Digital audio out	JP3
Parallel port	CN7	Digital audio in	JP4
USB port 1	CN8	32-bit PCI slots	PC1 – PC3
USB port 2	CN9	SB-link connector	SB1

### USER CONFIGURABLE SETTINGS

Function		Label	Position
	On board sound enabled	JP1	Open
	On board sound disabled	JP1	Closed
»	Microphone type select standard	JP2	Open
	Microphone type select special	JP2	Closed
»	CMOS memory normal operation	JP5	Pins 2 & 3 closed
	CMOS memory clear	JP5	Pins 1 & 2 closed
»	Keyboard power on disabled	JP8	Pins 2 & 3 closed
	Keyboard power on enabled	JP8	Pins 1 & 2 closed

### DIMM CONFIGURATION

<b>Size</b>	<b>Bank 0</b>	<b>Bank 1</b>	<b>Bank 2</b>
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64

128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64
168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
264MB	(1) 32M x 64	(1) 1M x 64	None
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
272MB	(1) 32M x 64	(1) 2M x 64	None
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
288MB	(1) 32M x 64	(1) 4M x 64	None
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
320MB	(1) 32M x 64	(1) 8M x 64	None

384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 32M x 64	(1) 16M x 64	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board accepts EDO & SDRAM memory.

#### DIMM VOLTAGE CONFIGURATION

Voltage	JP6A	JP6B
3.3v	Pins 1 & 2 closed	Pins 1 & 2 closed
5v	Pins 2 & 3 closed	Pins 2 & 3 closed

#### CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPUs. 128KB cache is located on the Celeron 300A and greater CPUs.