


CONNECTORS, JUMPERS SETTING

5737411417

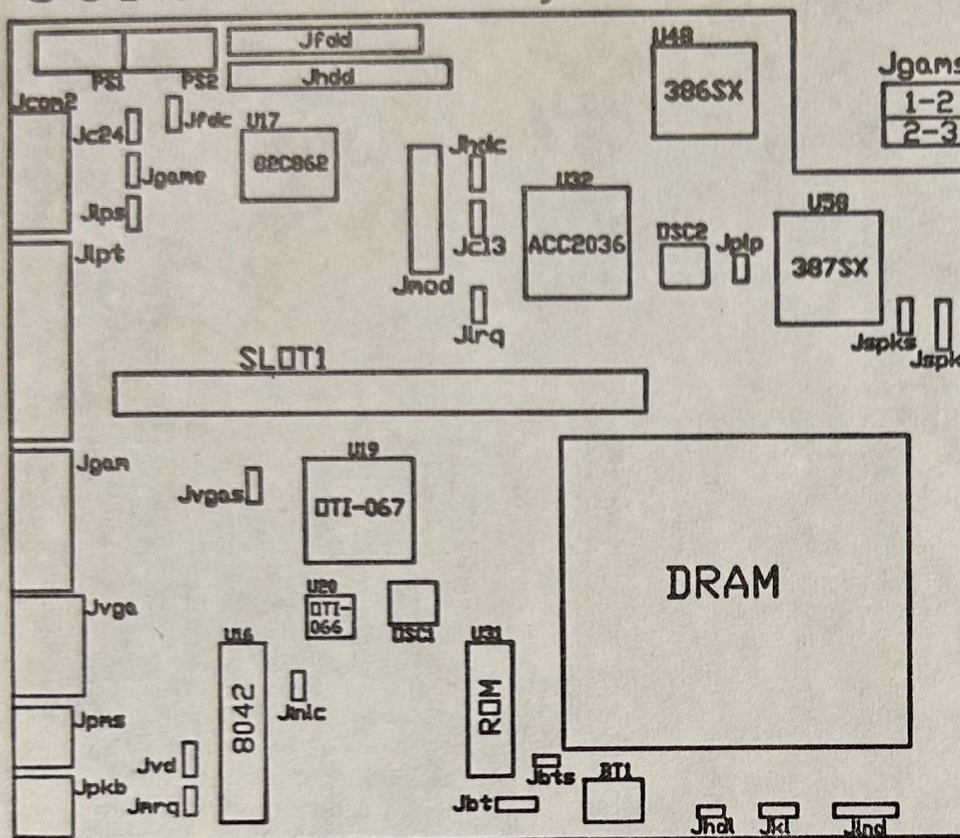

- PS1, PS2: Power supply connector
- Jpkb: PS/2 keyboard port connector
- Jpms: PS/2 mouse port connector
- Jmod: Modem port connector (COM1)
- Jcom2: COM2 port connector
- Jlpt: LPT port connector
- Jbt: External battery connector
- Jind: Front panel indicator connector
- Jfdd: FDD connector
- Jhdd: HDD connector
- Jhdi: Hard disk indicator connector
- Jkli: Keylock connector
- Jvga: VGA port connector
- Jgam: Game port connector
- Jspk: External speaker connector
- Jspks: Internal/external speaker select jumper

1-2	Onboard Buzzer Enabled (Default)
2-3	Using an External Speaker

Jgam: Game port enabled/disabled select jumper

1-2	Onboard Game Port Disabled
2-3	Onboard Game Port Enabled (Default)

Jfdc: FDC primary/secondary select jumper

1-2	Primary FDC, 3F0-3F7 (Default)
2-3	Secondary FDC, 370-377

Jhdc: HDC primary/secondary select jumper

1-2	Primary HDC, 1F0-1F7 (Default)
2-3	Secondary HDC, 170-177

Jc13: COM1/COM3 select jumper

1-2	Select COM1, 3F8-3FF (Default)
2-3	Select COM3, 3E8-3EF

Jc24: COM2/COM4 select jumper

1-2	Select COM2, 2F8-2FF (Default)
2-3	Select COM4, 2E8-2EF

Jlps: LPT port select jumper

1-2	Select LPT1, 378-37F (Default)
2-3	Select LPT2, 278-27F

Jlrq: LPT interrupt select jumper

1-2	Select IRQ5, LPT2
2-3	Select IRQ7, LPT1 (Default)

Jmrq: Mouse port interrupt select jumper

Jumped	Select IRQ12 (Default)
Open	None

Jvgas: VGA enabled/disabled select jumper

1-2	Onboard VGA Enabled (Default)
2-3	Onboard VGA Disabled

Jvdi: Display mode select jumper

1-2	Mono mode
2-3	Color mode (Default)

Jpip: Pipelined/non-pipelined select jumper

Jumped	Select Pipelined 80386SX (Default)
Open	Select Non-pipelined 80386SX

Jinlc: Interlaced/non-interlaced select jumper

Jumped	Select Interlaced monitor (Default)
Open	Select Non-Interlaced Monitor

Jbts: Battery select jumper

Jumped	Onboard Battery Enabled (Default)
Open	Using an External Battery