


# SUPER MICRO

370SLM

<b>Device Type</b>	Mainboard
<b>Processor</b>	Celeron
<b>Processor Speed</b>	333/366/400MHz
<b>Chip Set</b>	Intel 440LX
<b>Maximum Onboard Memory</b>	384MB (EDO & SDRAM supported)
<b>Cache</b>	128KB (located on the Celeron CPU)
<b>BIOS</b>	AMI
<b>Dimensions</b>	244mm x 184mm
<b>I/O Options</b>	32-bit PCI slots (3), 16-bit ISA slot, floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), IR connector, USB ports (2), ATX power connector, Wake-on-LAN connector

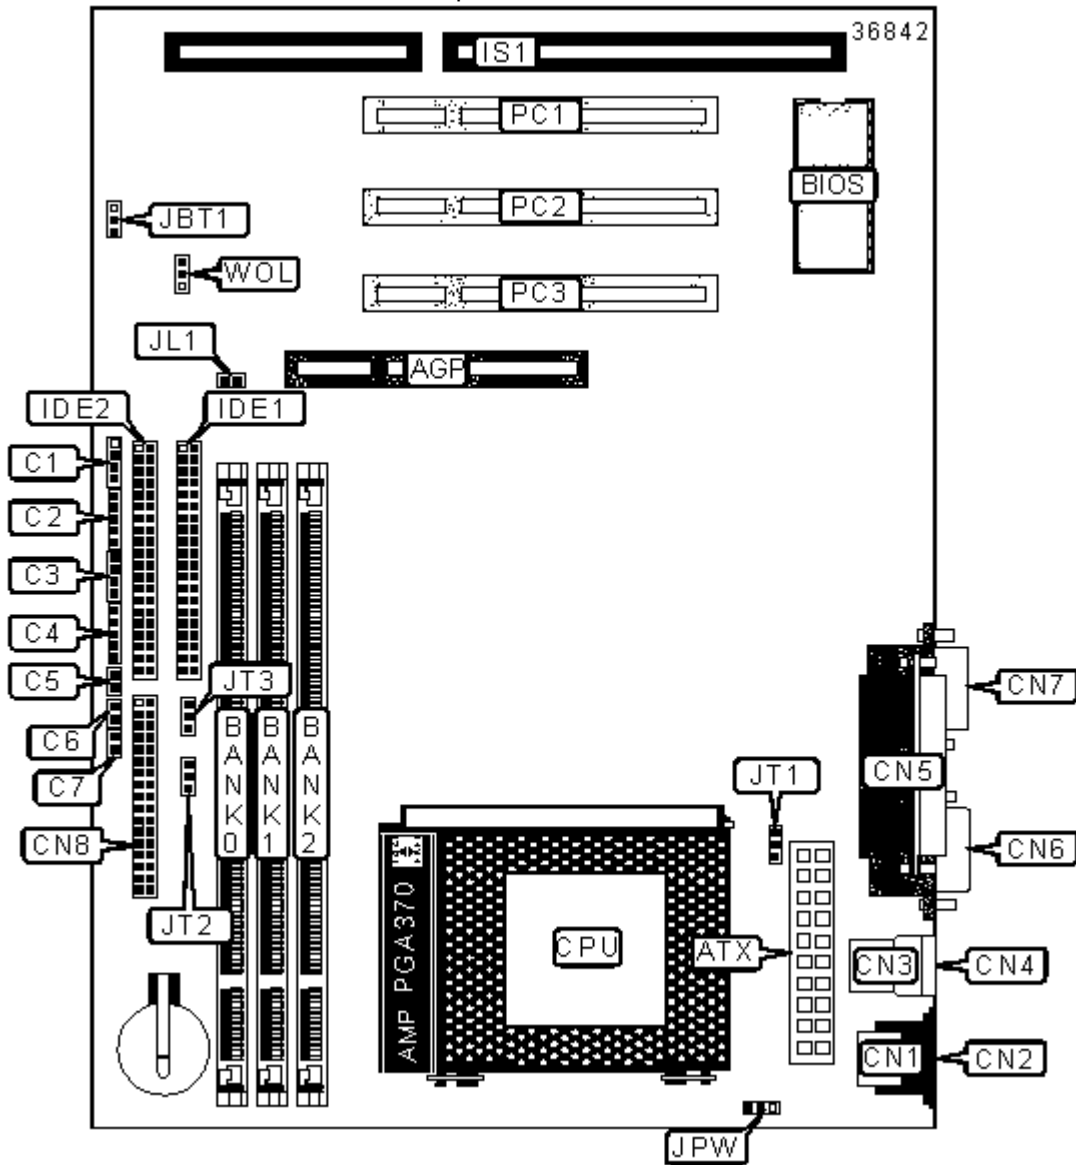

## CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Parallel port	CN5

ATX power connector	ATX	Serial port 1	CN6
IDE interface LED	C1	Serial port 2	CN7
Keylock	C2	Floppy drive interface	CN8
PC speaker	C3	IDE interface 1	IDE1
IR connector	C4	IDE interface 2	IDE2
Power LED	C5	16-bit ISA slot	IS1
Reset switch	C6	Chassis intrusion switch	JL1
Overheat LED	C7	CPU fan power	JT1
PS/2 mouse port	CN1	Chassis fan power	JT2
Keyboard port	CN2	Thermal control fan power	JT3
USB port 1	CN3	32-bit PCI slots	PC1 - PC3
USB port 2	CN4	Wake-on-LAN connector	WOL

#### USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	JBT1	Pins 1 & 2 closed
	CMOS memory clear	JBT1	Pins 2 & 3 closed
»	Keyboard wake-up disabled	JPW	Pins 1 & 2 closed
	Keyboard wake-up enabled	JPW	Pins 2 & 3 closed

#### DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64

48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
Note: Board supports EDO & SDRAM memory.			

### CACHE CONFIGURATION

Note: 128KB cache is located on the Celeron 300A and greater CPUs.