


PACKARD BELL

PB 600 SPECTRIA, PB 600

Device Type	Mainboard
Processor	Pentium
Processor Speed	75/90/100MHz
Chip Set	VLSI
Video Chip Set	Cirrus Logic
Maximum Onboard Memory	136MB
Maximum Video Memory	2MB
Cache	256KB
BIOS	Phoenix
Dimensions	Unidentified
I/O Options	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 keyboard port, PS/2 mouse port, serial port, VESA feature connector, VGA port, riser slot, AT power connector

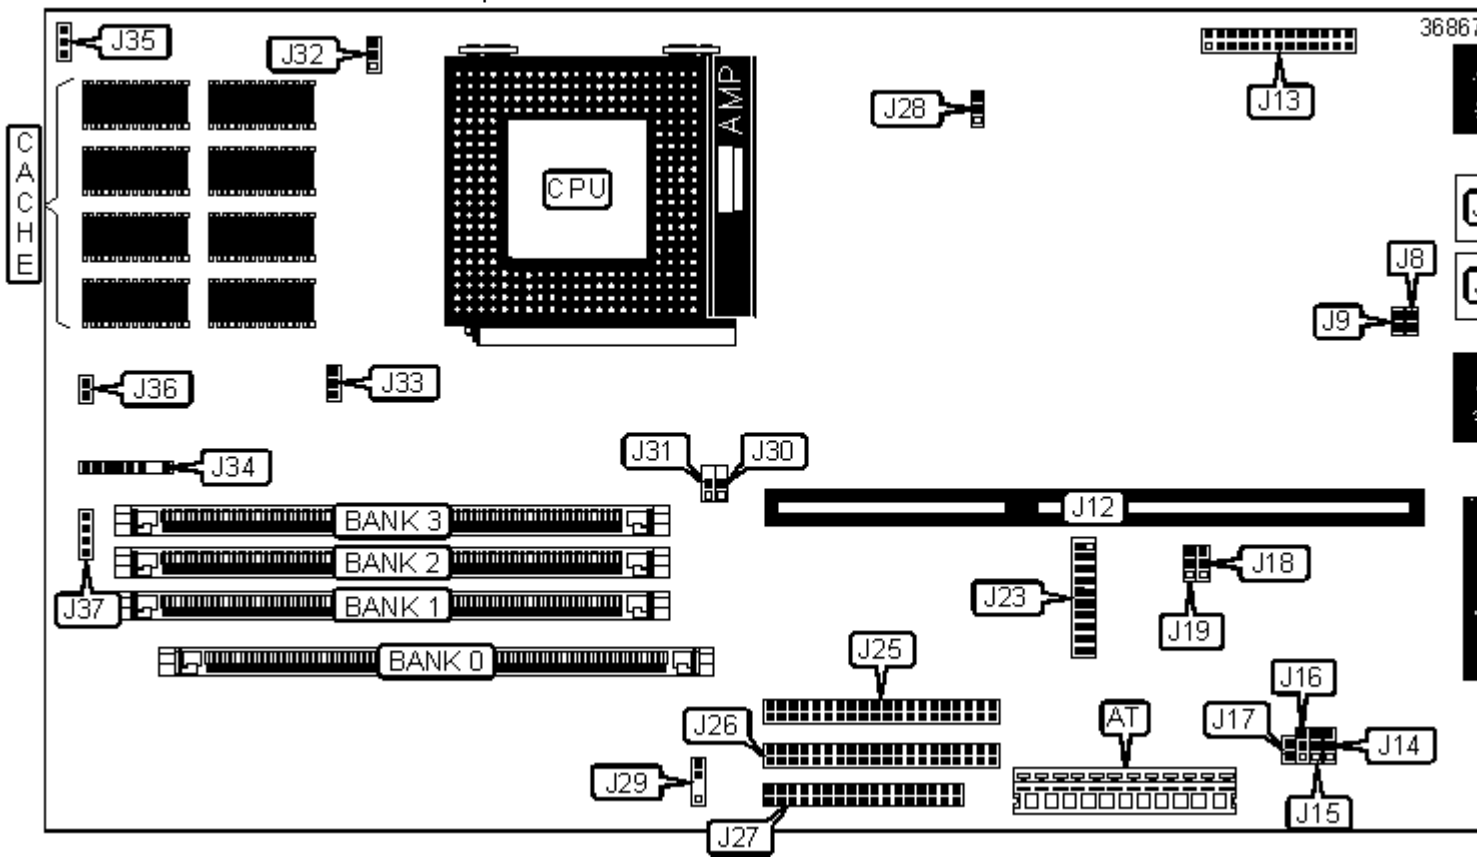

CONNECTIONS			
Purpose	Location	Purpose	Location
AT power connector	AT	Modem header connector	J23
VGA port	J1	IDE interface 1	J25
PS/2 keyboard port	J2	IDE interface 2	J26
PS/2 mouse port	J3	Floppy drive interface	J27
Serial port	J4	Front panel connector	J34

Parallel port	J5	Auxiliary fan power	J35
Riser slot	J12	Keylock connector	J36
VESA feature connector	J13		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	J8	Open
»	Factory configured - do not alter	J9	Unidentified
»	Boot normal operation	J14	Pins 2 & 3 closed
	Boot block selected	J14	Pins 1 & 2 closed
»	On-board I/O enabled	J15	Pins 2 & 3 closed
	On-board I/O disabled	J15	Pins 1 & 2 closed
»	Factory configured - do not alter	J16	Unidentified
»	Standard power supply selected	J17	Closed
	Standby power supply selected	J17	Open
	Standard/VR CPU 3.3V selected	J28	Pins 1 & 2 closed
	VRE CPU 3.6V selected	J28	Pins 2 & 3 closed
»	On-board battery selected	J29	Pins 3 & 4 closed
	External battery selected - jumper becomes connector for battery	J29	Open
»	Factory configured - do not alter	J32	Open
»	Factory configured - do not alter	J33	Unidentified
»	On-board speaker selected	J37	Pins 3 & 4 closed
	External speaker selected - jumper becomes connector for battery	J37	Open

SIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 36	None	None	None
2MB	(1) 512K x 36	None	None	None

2MB	(1) 256K x 36	(1) 256K x 36	None	None
3MB	(1) 512K x 36	(1) 256K x 36	None	None
3MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	None
3MB	(1) 256K x 36	(1) 512K x 36	None	None
4MB	(1) 1M x 36	None	None	None
4MB	(1) 512K x 36	(1) 256K x 36	(1) 256K x 36	None
4MB	(1) 512K x 36	(1) 512K x 36	None	None
4MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
5MB	(1) 1M x 36	(1) 256K x 36	None	None
5MB	(1) 512K x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
5MB	(1) 256K x 36	(1) 512K x 36	(1) 512K x 36	None
5MB	(1) 256K x 36	(1) 1M x 36	None	None
6MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	None
6MB	(1) 1M x 36	(1) 512K x 36	None	None
6MB	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36	None
6MB	(1) 512K x 36	(1) 1M x 36	None	None
7MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
7MB	(1) 256K x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
8MB	(1) 2M x 36	None	None	None
8MB	(1) 1M x 36	(1) 512K x 36	(1) 512K x 36	None
8MB	(1) 1M x 36	(1) 1M x 36	None	None
8MB	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
9MB	(1) 2M x 36	(1) 256K x 36	None	None
9MB	(1) 256K x 36	(1) 1M x 36	(1) 1M x 36	None
9MB	(1) 256K x 36	(1) 2M x 36	None	None
10MB	(1) 2M x 36	(1) 256K x 36	(1) 256K x 36	None
10MB	(1) 2M x 36	(1) 512K x 36	None	None
10MB	(1) 1M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
10MB	(1) 512K x 36	(1) 1M x 36	(1) 1M x 36	None

10MB	(1) 512K x 36	(1) 2M x 36	None	None
11MB	(1) 2M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
12MB	(1) 2M x 36	(1) 512K x 36	(1) 512K x 36	None
12MB	(1) 2M x 36	(1) 1M x 36	None	None
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	None
12MB	(1) 1M x 36	(1) 2M x 36	None	None
13MB	(1) 256K x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
14MB	(1) 2M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
14MB	(1) 512K x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
16MB	(1) 4M x 36	None	None	None
16MB	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36	None
16MB	(1) 2M x 36	(1) 2M x 36	None	None
16MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
17MB	(1) 4M x 36	(1) 256K x 36	None	None
17MB	(1) 256K x 36	(1) 2M x 36	(1) 2M x 36	None
17MB	(1) 256K x 36	(1) 4M x 36	None	None
18MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	None
18MB	(1) 4M x 36	(1) 512K x 36	None	None
18MB	(1) 512K x 36	(1) 2M x 36	(1) 2M x 36	None
18MB	(1) 512K x 36	(1) 4M x 36	None	None
19MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
20MB	(1) 4M x 36	(1) 512K x 36	(1) 512K x 36	None
20MB	(1) 4M x 36	(1) 1M x 36	None	None
20MB	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
20MB	(1) 1M x 36	(1) 2M x 36	(1) 2M x 36	None
20MB	(1) 1M x 36	(1) 4M x 36	None	None
22MB	(1) 4M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
24MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	None
24MB	(1) 4M x 36	(1) 2M x 36	None	None

24MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	None
24MB	(1) 2M x 36	(1) 4M x 36	None	None
25MB	(1) 256K x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
26MB	(1) 512K x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
28MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
28MB	(1) 1M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
32MB	(1) 8M x 36	None	None	None
32MB	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36	None
32MB	(1) 4M x 36	(1) 4M x 36	None	None
32MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
33MB	(1) 8M x 36	(1) 256K x 36	None	None
33MB	(1) 256K x 36	(1) 4M x 36	(1) 4M x 36	None
33MB	(1) 256K x 36	(1) 8M x 36	None	None
34MB	(1) 8M x 36	(1) 256K x 36	(1) 256K x 36	None
34MB	(1) 8M x 36	(1) 512K x 36	None	None
34MB	(1) 512K x 36	(1) 4M x 36	(1) 4M x 36	None
34MB	(1) 512K x 36	(1) 8M x 36	None	None
35MB	(1) 8M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
36MB	(1) 8M x 36	(1) 512K x 36	(1) 512K x 36	None
36MB	(1) 8M x 36	(1) 1M x 36	None	None
36MB	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36	None
36MB	(1) 1M x 36	(1) 8M x 36	None	None
38MB	(1) 8M x 36	(1) 512K x 36	(1) 512K x 36	(1) 512K x 36
40MB	(1) 8M x 36	(1) 1M x 36	(1) 1M x 36	None
40MB	(1) 8M x 36	(1) 2M x 36	None	None
40MB	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
40MB	(1) 2M x 36	(1) 4M x 36	(1) 4M x 36	None
40MB	(1) 2M x 36	(1) 8M x 36	None	None
44MB	(1) 8M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36

48MB	(1) 8M x 36	(1) 2M x 36	(1) 2M x 36	None
48MB	(1) 8M x 36	(1) 4M x 36	None	None
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	None
48MB	(1) 4M x 36	(1) 8M x 36	None	None
49MB	(1) 256K x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
50MB	(1) 512K x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
52MB	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
56MB	(1) 8M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
56MB	(1) 2M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
64MB	(1) 8M x 36	(1) 4M x 36	(1) 4M x 36	None
64MB	(1) 8M x 36	(1) 8M x 36	None	None
64MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
65MB	(1) 256K x 36	(1) 8M x 36	(1) 8M x 36	None
66MB	(1) 512K x 36	(1) 8M x 36	(1) 8M x 36	None
68MB	(1) 1M x 36	(1) 8M x 36	(1) 8M x 36	None
72MB	(1) 2M x 36	(1) 8M x 36	(1) 8M x 36	None
80MB	(1) 8M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
80MB	(1) 4M x 36	(1) 8M x 36	(1) 8M x 36	None
96MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	None
97MB	(1) 256K x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
98MB	(1) 512K x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
100MB	(1) 1M x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
104MB	(1) 2M x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
112MB	(1) 4M x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36
128MB	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36	(1) 8M x 36

CPU CLOCK SPEED SELECTION

Clock Speed	J30	J31
50MHz	Open	Open

60 - 66MHz	Closed	Closed
------------	--------	--------

PARALLEL PORT ECP DRQ/DACK SELECTION			
	Setting	J18	J19
»	Channel 3	Pins 2 & 3 closed	Pins 2 & 3 closed
	Channel 1	Pins 1 & 2 closed	Pins 1 & 2 closed