


BOARDRUNNER

6VABX2 (VER. 1.2)

Device Type	Mainboard
Processor	Pentium II/Celeron
Processor Speed	233/266/300/333/350/400/433/450MHz
Chip Set	VIA
Maximum Onboard Memory	768MB (EDO & SDRAM supported)
Cache	0/128/256/512KB (located on the CPU)
BIOS	Award
Dimensions	305mm x 180mm
I/O Options	16-bit ISA slots (2), 32-bit PCI slots (5), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, PS/2 keyboard port, serial ports (2), IR connector, USB ports (2), ATX power connector, AGP slot, wake-on-LAN connector, SB-Link connector

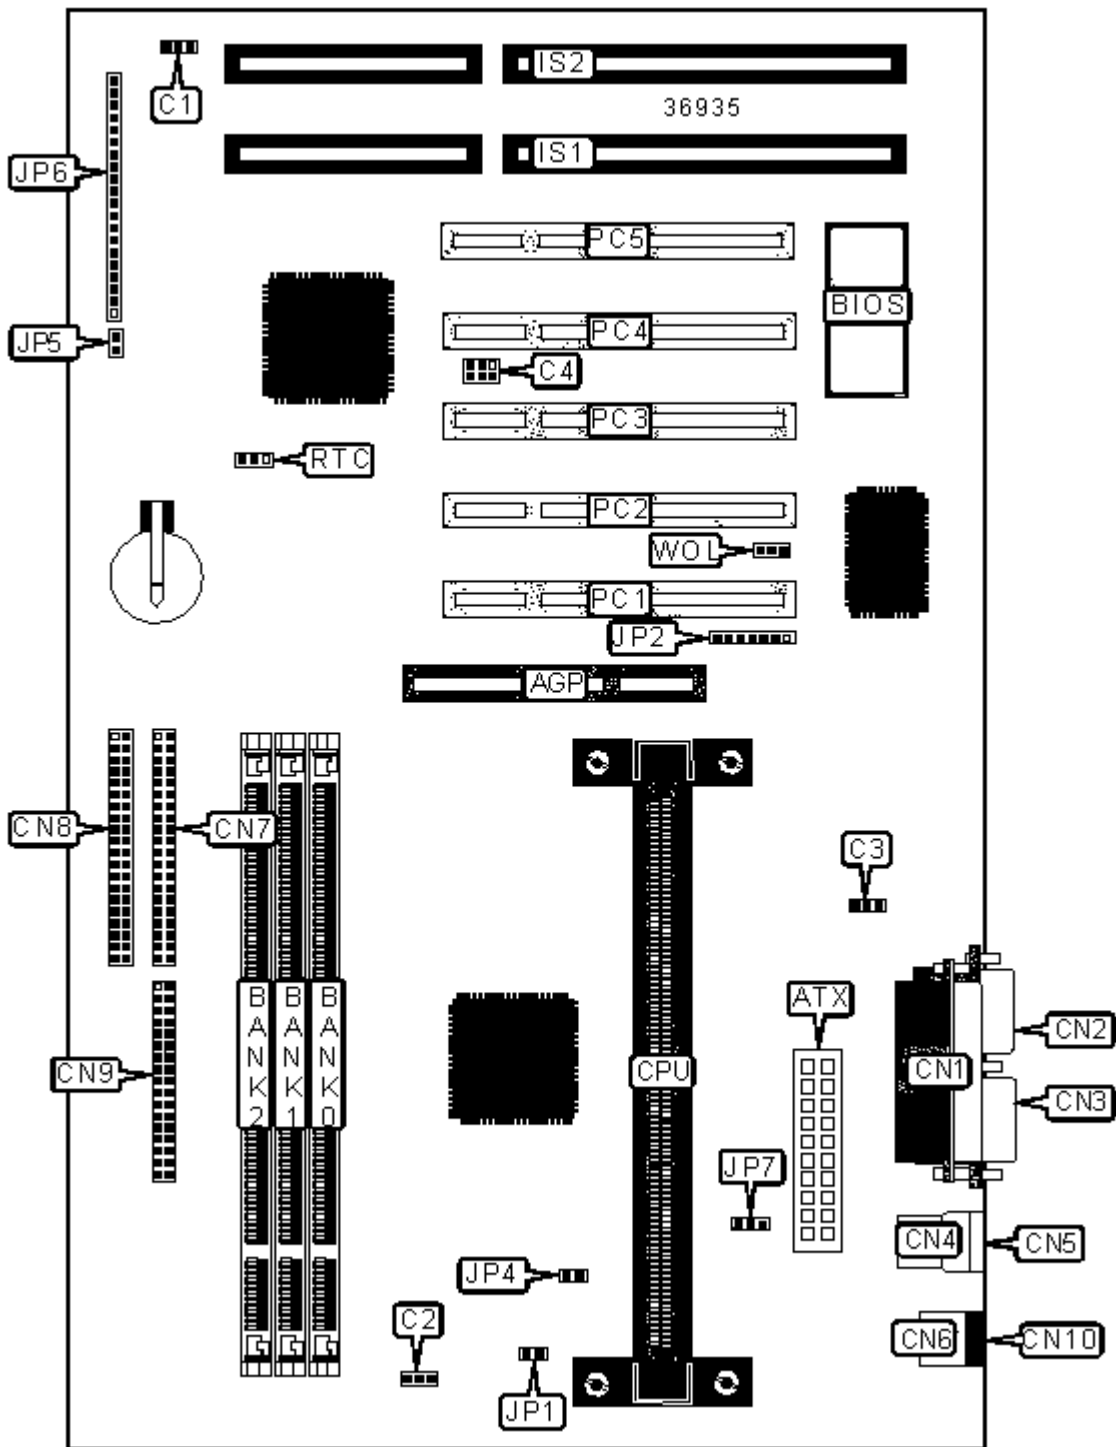

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Floppy drive interface	CN9
ATX power connector	ATX	PS/2 keyboard port	CN10
Chassis fan power	C1	16-bit ISA slots	IS1-IS2
Chassis fan power	C2	IR connector	JP2

Chassis fan power	C3	Soft off power supply	JP5
SB-Link connector	C4	Power LED & keylock	JP6/pins 1 – 5
Parallel port	CN1	Speaker	JP6/pins 7 – 10
Serial port 2	CN2	Reset switch	JP6/pins 12 & 13
Serial port 1	CN3	IDE interface LED	JP6/pins 15 & 16
USB port 1	CN4	Turbo LED	JP6/pins 18 & 19
USB port 2	CN5	Green PC connector	JP6/pins 21 & 22
PS/2 mouse port	CN6	32-bit PCI slots	PC1 – PC5
IDE interface 2	CN7	Wake-on-LAN connector	WOL
IDE interface 1	CN8		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	JP1	Closed
»	Factory configured - do not alter	JP4	Unidentified
»	Factory configured - do not alter	JP7	Unidentified
»	CMOS memory normal operation	RTC	Pins 1 & 2 closed
	CMOS memory clear	RTC	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64

48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board supports EDO & SDRAM memory.

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPUs. 128KB cache is located on the Celeron 300A and

greater CPUs.