


FIRST INTERNATIONAL COMPUTER, INC.

SD11

Device Type	Mainboard
Processor	AM Athlon
Processor Speed	500/550/600/650MHz
Chip Set	AMD/VIA
Maximum Onboard Memory	768MB (SDRAM supported)
Cache	128KB
BIOS	AMI
Dimensions	305mm x 244mm
I/O Options	16-bit ISA slot (1), 32-bit PCI slots (5), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse port, PS/2 keyboard port, serial port, USB ports (2), ATX power connector, AGP slot, USB interface

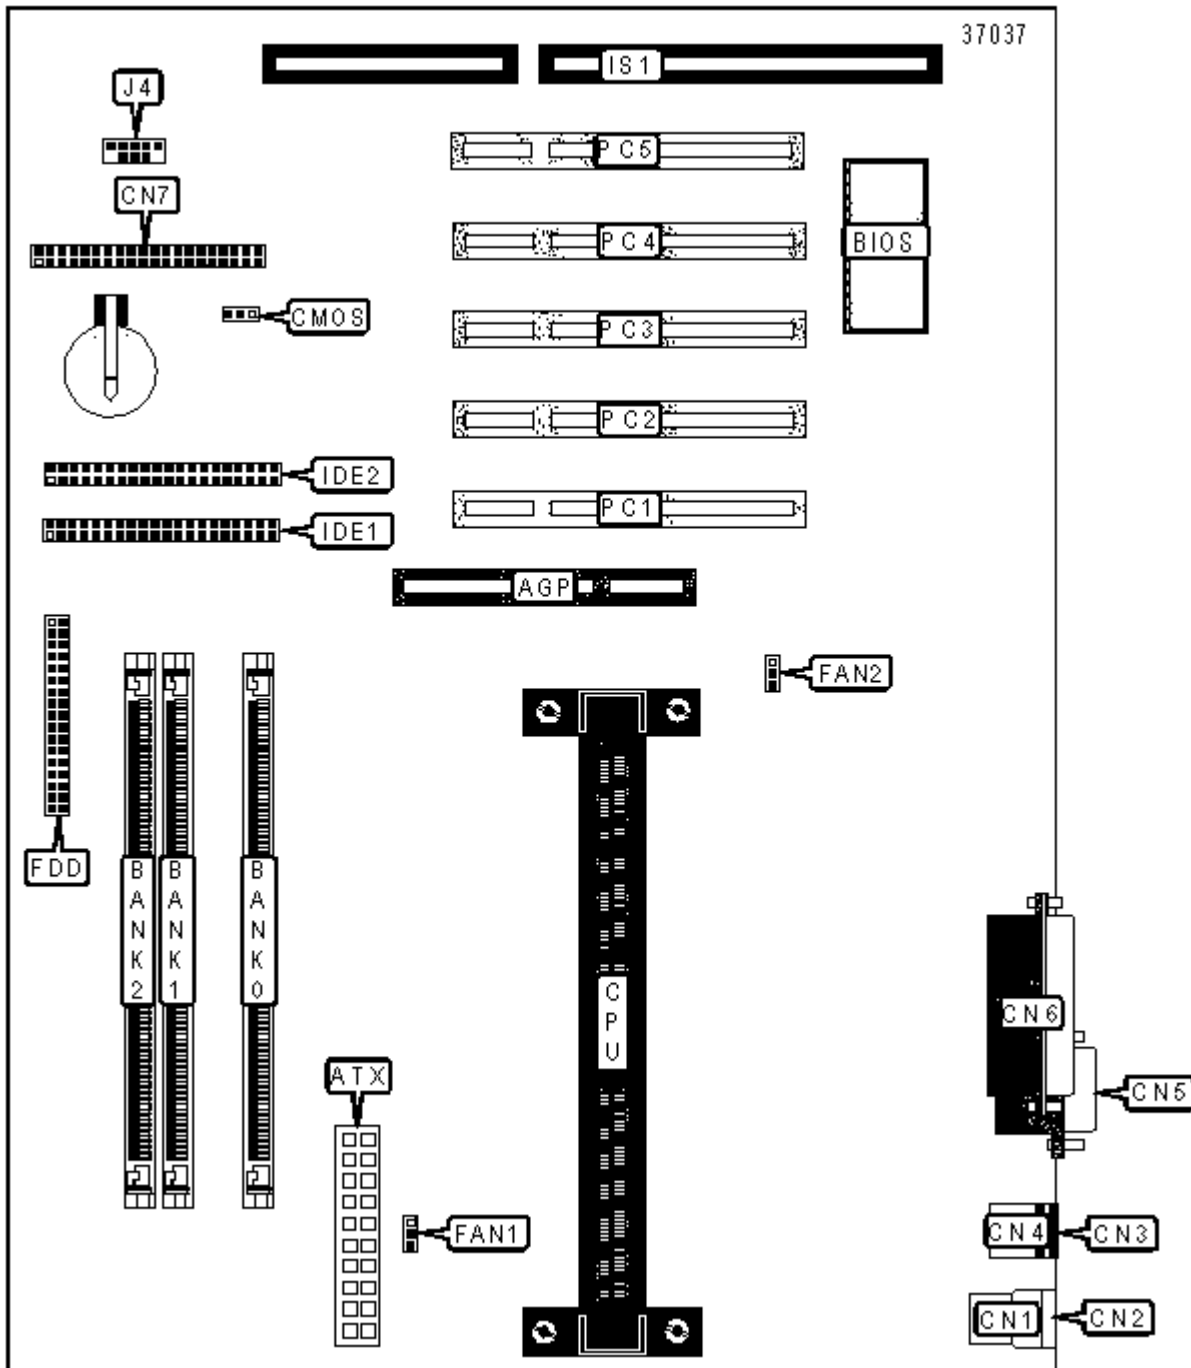

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Power LED (2 pin)	CN7/Pins 11 & 13
ATX power connector	ATX	Speaker	CN7/Pins 8, 10, 12 & 14
USB port 2	CN1	Power switch	CN7/Pins 15 & 16
USB port 1	CN2	Reset switch	CN7/Pins 19 & 20

PS/2 mouse port	CN3	CPU fan power	FAN1
PS/2 keyboard port	CN4	System fan power	FAN2
Serial port	CN5	Floppy drive interface	FDD
Parallel port	CN6	IDE interface 1	IDE1
Green PC connector	CN7/Pins 1 & 2	IDE interface 2	IDE2
Green PC LED	CN7/Pins 3 & 4	USB interface	J4
IDE interface LED	CN7/Pins 5 & 6	16-bit ISA slot	IS1
Power LED (3 pin)	CN7/Pins 7, 9 & 11	32-bit PCI slots	PC1 - PC5

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	CMOS	Pins 1 & 2 closed
	CMOS memory clear	CMOS	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64

80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
384MB	(1) 32M x 64	(1) 8M x 64	(1) 8M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None
512MB	(1) 32M x 64	(1) 16M x 64	(1) 16M x 64
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: Board supports SDRAM memory.