


VISIONTOP TECHNOLOGY

S7-MVP3

Device Type	Mainboard
Processor	CX 6X86/CX 6X86L/CX 6X86MX/AM K5/AM K6/AM K6-2/Pentium/Pentium MMX
Processor Speed	75/90/100/120/133/150/166/180/200/233/250/266/300/333MHz
Chip Set	VIA
Maximum Onboard Memory	384MB (SDRAM supported)
Cache	512/1024KB (located on the CPU)
BIOS	Award
Dimensions	305mm x 200mm
I/O Options	32-bit PCI slots (5), 16-bit ISA slots (2), floppy drive interface, IDE interfaces (2), PS/2 keyboard port, keyboard interface, mouse interface, parallel port, PS/2 mouse port, serial ports (2), IR connectors (2), USB ports (2), Green PC connector, ATX power connector, AGP slot

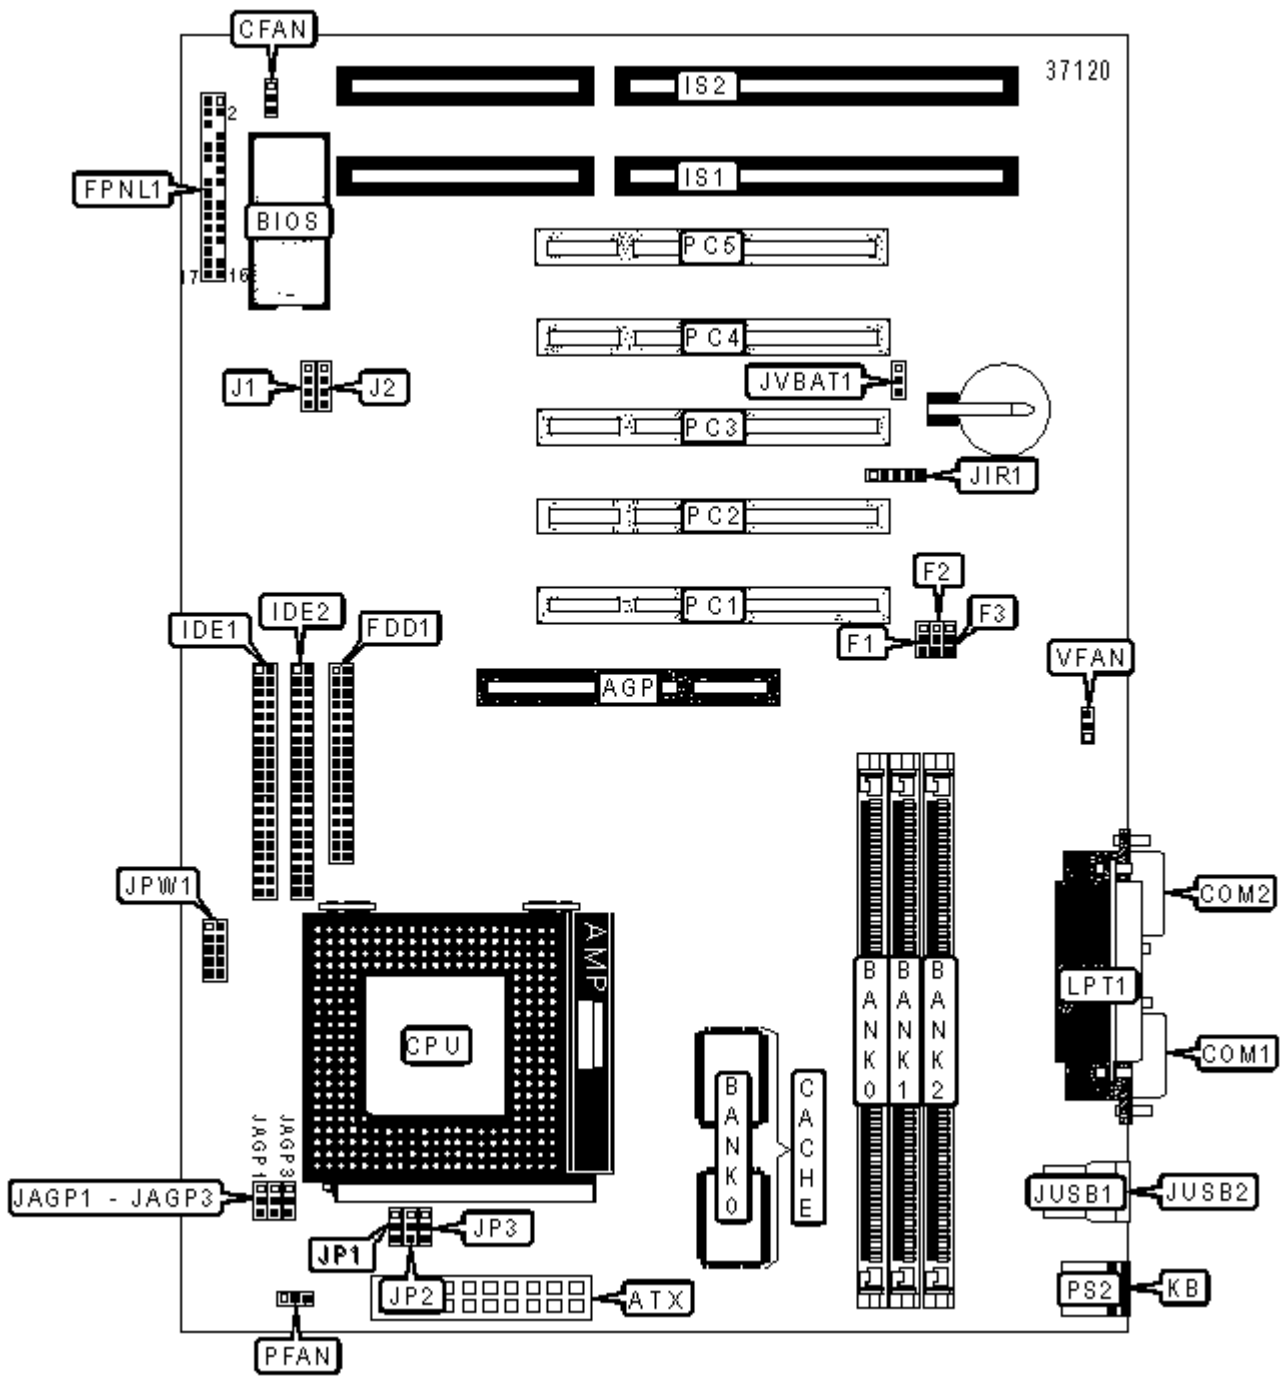

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	IDE interface 1	IDE1
ATX power connector	ATX	IDE interface 2	IDE2
Chassis fan power	CFAN	16-bit ISA slots	IS1 - IS2
Serial port 1	COM1	Keyboard interface	J1
Serial port 2	COM2	Mouse interface	J2
Floppy drive interface	FDD1	IR connector	JIR1

Turbo LED	FPNL1/Pins 1 & 2	USB port 1	JUSB1
Power LED & keylock	FPNL1/Pins 4 - 8	USB port 2	JUSB2
Speaker	FPNL1/Pins 10 - 13	PS/2 keyboard port	KB
Green PC connector	FPNL1/Pins 15 & 16	Parallel port	LPT1
Power switch	FPNL1/Pins 17 & 18	32-bit PCI slots	PC1 - PC5
IRDA connector	FPNL1/Pins 19 - 23	PS/2 mouse port	PS2
IDE interface LED	FPNL1/Pins 24 & 25	CPU fan power	PFAN
Reset switch	FPNL1/Pins 27 & 28	Power fan power	VFAN
Turbo switch	FPNL1/Pins 30 - 32		

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	JVBAT1	Pins 1 & 2 closed
	CMOS memory clear	JVBAT1	Pins 2 & 3 closed

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64

80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None
256MB	(1) 32M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
272MB	(1) 32M x 64	(1) 1M x 64	(1) 1M x 64
288MB	(1) 32M x 64	(1) 2M x 64	(1) 2M x 64
320MB	(1) 32M x 64	(1) 4M x 64	(1) 4M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

Note: Board supports SDRAM memory.

CACHE CONFIGURATION

Size	Bank 0
512KB	(2) 64K x 32
1024KB	(2) 128K x 32

CPU/PCI CLOCK SPEED SELECTION

CPU speed	JAGP1	JAGP2	JAGP3
» 60 - 75MHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
83 - 112MHz	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed

CLOCK SPEED SELECTION

Clock Speed		F1	F2	F3
	60MHz	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
»	66MHz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
	68.5MHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
	75MHz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
	83MHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
	90MHz	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
	100MHz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
	112MHz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed

CPU MULTIPLIER SELECTION

Multiplier		JP1	JP2	JP3
	1.5x	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
	2x	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
	2.5x	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
»	3x	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
	3.5x	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
	4x	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
	4.5x	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
	5x	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
	5.5x	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed

CPU VOLTAGE SELECTION (SINGLE)

Voltage	JPW1
3.3V	Pins 1 & 2, 5 & 6, 7 & 8 closed
3.5V	Pins 1 & 2, 3 & 4, 5 & 6, 7 & 8 closed

CPU VOLTAGE SELECTION (DUAL)

Voltage		JPW1
	2.0V	Pins 3 & 4, 5 & 6, 7 & 8, 9 & 10 closed
	2.1V	Pins 1 & 2 closed
»	2.8V	Pins 7 & 8 closed
	2.9V	Pins 1 & 2, 7 & 8 closed
	3.2V	Pins 5 & 6, 7 & 8 closed
	3.4V	Pins 3 & 4, 5 & 6, 7 & 8 closed