


# DELTA PRODUCTS CORPORATION

M370-ZX-A

<b>Device Type</b>	Mainboard
<b>Processor</b>	Celeron
<b>Processor Speed</b>	300/333/366/400/433MHz
<b>Chip Set</b>	Intel 440ZX
<b>Maximum Onboard Memory</b>	256MB (SDRAM supported)
<b>Cache</b>	128KB (located on the Celeron CPU)
<b>BIOS</b>	Award
<b>Dimensions</b>	305mm x 178mm
<b>I/O Options</b>	16-bit ISA slots (2), 32-bit PCI slots (3), floppy drive interface, IDE interfaces (2), parallel interface, PS/2 mouse interface, AT keyboard port, serial interfaces (2), USB interfaces (2), ATX power connector, AT power connector, AGP slot

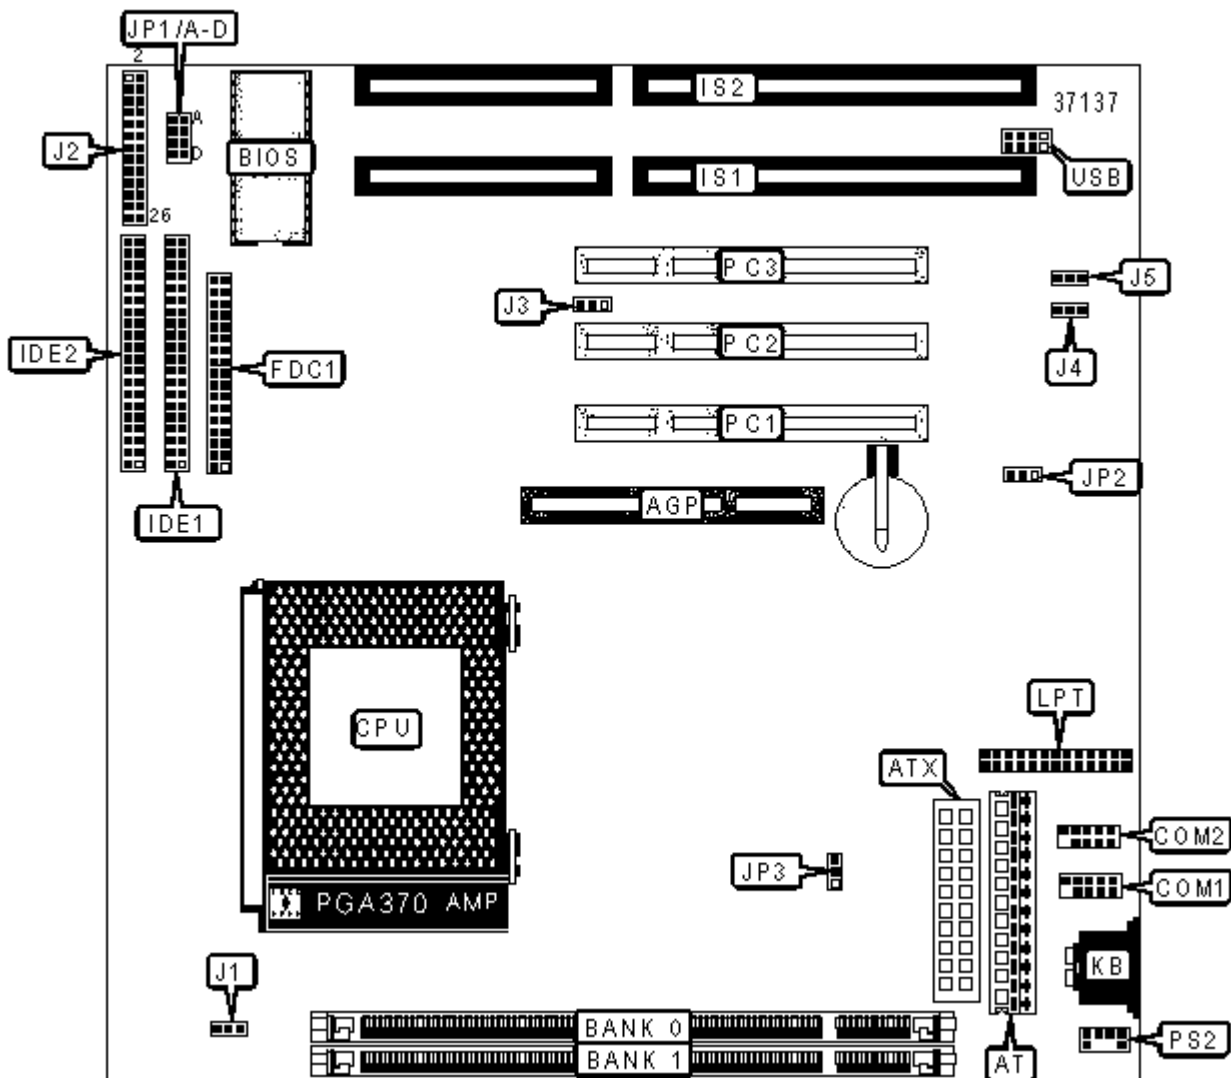

CONNECTIONS			
Purpose	Location	Purpose	Location
AGP slot	AGP	IDE interface LED	J2/Pins 7 & 8

AT power connector	AT	Green PC connector	J2/Pins 13 & 14
ATX power connector	ATX	Power LED & keylock	J2/Pins 18, 20, 22, 24 & 26
Serial port 1	COM1	Speaker	J2/Pins 19, 21, 23 & 25
Serial port 2	COM2	SB-Link connector	J3
Floppy drive interface	FDC1	Wake-on-LAN connector	J4
IDE interface 1	IDE1	Chassis fan power	J5
IDE interface 2	IDE2	AT keyboard port	KB
16-bit ISA slots	IS1 - IS2	Parallel port	LPT
CPU fan power	J1	32-bit PCI slots	PC1 - PC5
Power switch	J2/Pins 1 & 2	PS/2 mouse interface	PS2
Reset switch	J2/Pins 5 & 6	USB interface	USB

#### USER CONFIGURABLE SETTINGS

Function		Label	Position
»	CMOS memory normal operation	JP2	Pins 1 & 2 closed
	CMOS memory clear	JP2	Pins 2 & 3 closed

#### DIMM CONFIGURATION

Size	Bank 0	Bank 1
8MB	(1) 1M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64
16MB	(1) 2M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64
32MB	(1) 4M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64

64MB	(1) 8M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64
128MB	(1) 16M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64

Note: Board supports SDRAM memory.

### CACHE CONFIGURATION

Note: 128KB cache is located on the Celeron 300A and greater version A CPUs.

### CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JP1/A	JP1/B	JP1/C	JP1/D	JP2
300MHz	66MHz	4.5x	Open	Closed	Open	Closed	1 & 2
333MHz	66MHz	5x	Closed	Closed	Open	Open	1 & 2
366MHz	66MHz	5.5x	Closed	Open	Open	Open	1 & 2
400MHz	66MHz	6x	Open	Closed	Closed	Closed	1 & 2
433MHz	66MHz	6.5x	Open	Open	Closed	Closed	1 & 2

Note: Pins designated should be in the closed position.