


DELTA PRODUCTS CORPORATION

MP2-EX-MX

Device Type	Mainboard
Processor	Celeron
Processor Speed	233/266/300/333MHz
Chip Set	Intel 440EX
Maximum Onboard Memory	256MB (SDRAM supported)
Cache	0/128KB (located on the Celeron CPU)
BIOS	Award
Dimensions	244mm x 200mm
I/O Options	16-bit ISA slots (2), 32-bit PCI slots (2), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, PS/2 keyboard port, serial ports (2), USB ports (2), ATX power connector, AGP slot, Wake-on-LAN connector, SB-Link connector

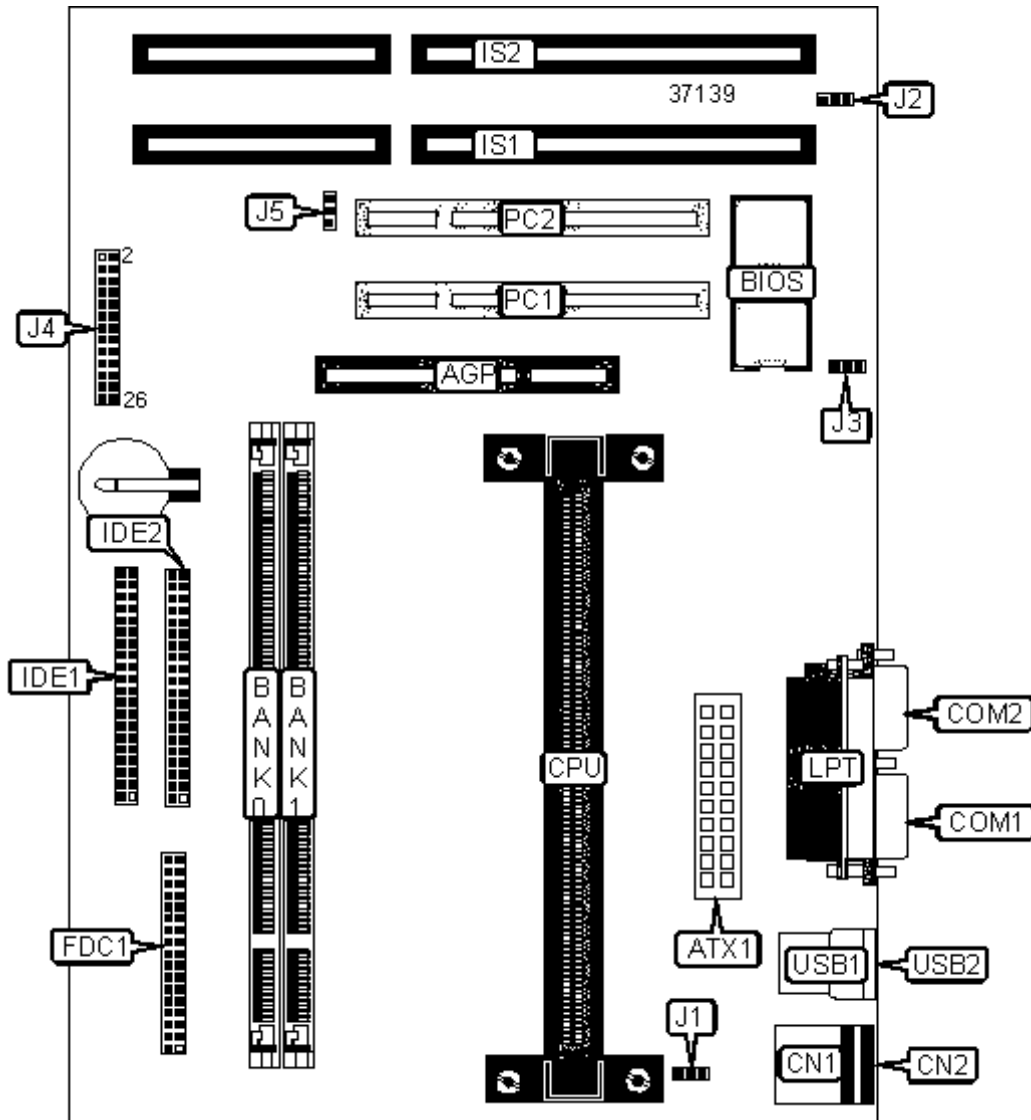

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Wake-on-LAN connector	J3

ATX power connector	ATX1	Power switch	J4/Pins 1 & 2
PS/2 mouse port	CN1	Reset switch	J4/Pins 5 & 6
PS/2 keyboard port	CN2	IDE interface LED	J4/Pins 7 & 8
Serial port 1	COM1	Green PC connector	J4/Pins 13 & 14
Serial port 2	COM2	Power LED & keylock	J4/Pins 18,20,22,24 & 26
Floppy drive interface	FDC1	Speaker	J4/Pins 19, 21, 23 & 25
IDE interface 1	IDE1	SB-Link connector	J5
IDE interface 2	IDE2	Parallel port	LPT
16-bit ISA slots	IS1 - IS2	32-bit PCI slots	PC1 - PC2
CPU fan power	J1	USB port 1	USB1
Chassis fan power	J2	USB port 2	USB2

DIMM CONFIGURATION

Size	Bank 0	Bank 1
8MB	(1) 1M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64
16MB	(1) 2M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64
32MB	(1) 4M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64
64MB	(1) 8M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64

128MB	(1) 16M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64
Note: Board supports SDRAM memory.		

CACHE CONFIGURATION

Note: 128KB cache is located on the Celeron 300A and greater version A CPUs.