


TOTEM TECHNOLOGY CO., LTD.

TM-P2ZXAT

Configuration

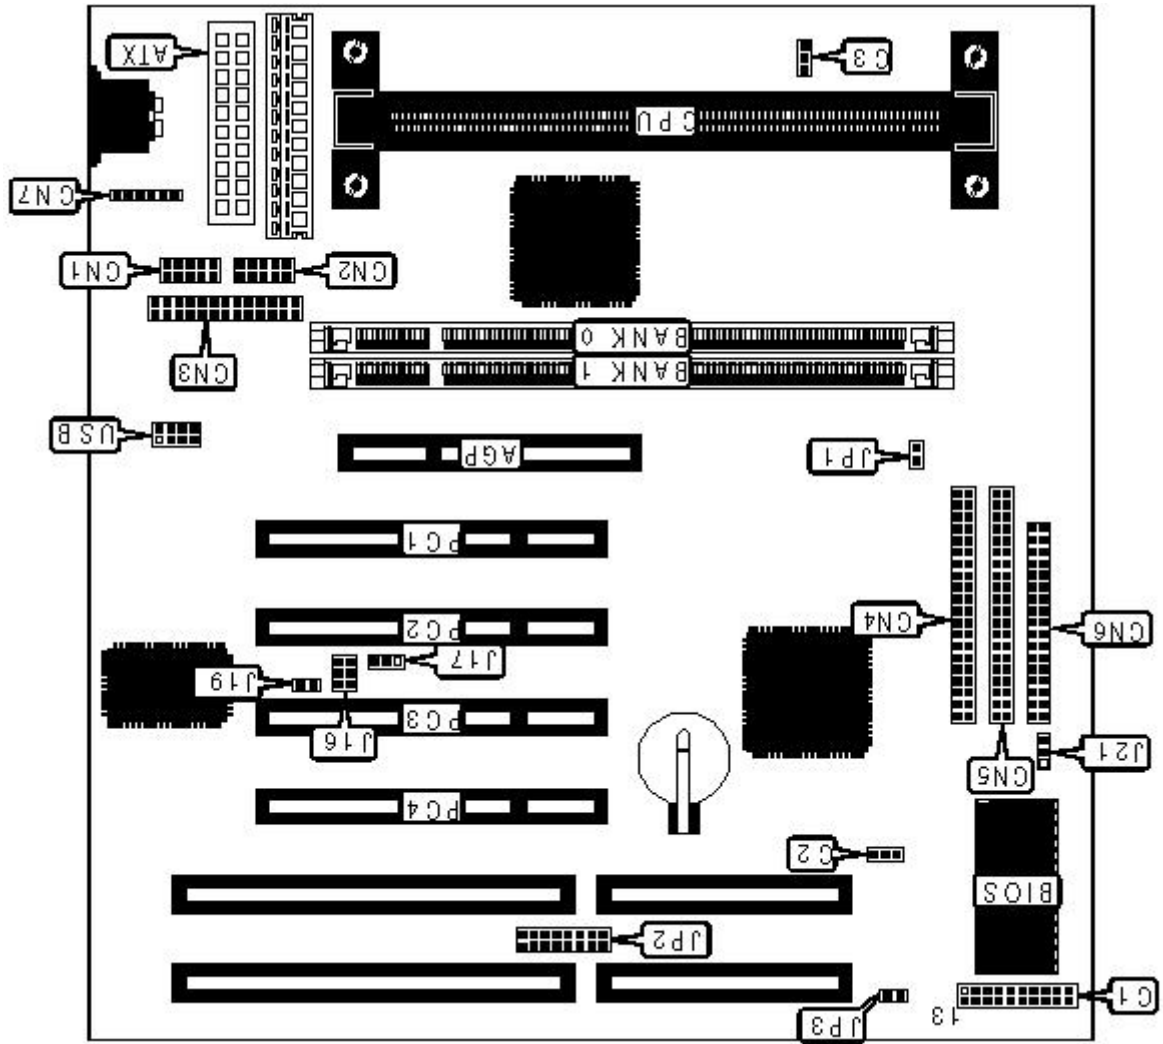

## CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	IR connector	C1/pins 13 – 16
ATX power connector	ATX	Speaker	C1/pins 17 – 20
Serial port 2	CN1	IDE interface LED	C1/pins 21 & 22
Serial port 1	CN2	Soft off power supply	C1/pins 23 & 24
Parallel port	CN3	Chassis fan power	C2
IDE interface 1	CN4	CPU fan power	C3
IDE interface 2	CN5	SB-link connector	J16
Floppy drive interface	CN6	Wake on LAN connector	J17
PS/2 mouse interface	CN7	Debug connector	JP2
IR connector	C1/pins 1 – 5	32-bit PCI slots	PC1 – PC4
Power LED & keylock	C1/pins 6 - 10	USB connector	USB
Reset switch	C1/pins 11 & 12		

## USER CONFIGURABLE SETTINGS

Function	Label	Position
» Factory configured - do not alter	J19	Unidentified
» CMOS memory normal operation	J21	Pins 1 & 2 closed
CMOS memory clear	J21	Pins 2 & 3 closed
Debug display type select on board	JP3	Closed
Debug display type select external	JP3	Open

## DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None

16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
48MB	(1) 4M x 64	(1) 2M x 64	None
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None
72MB	(1) 8M x 64	(1) 1M x 64	None
80MB	(1) 8M x 64	(1) 2M x 64	None
96MB	(1) 8M x 64	(1) 4M x 64	None

128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
144MB	(1) 16M x 64	(1) 2M x 64	None
160MB	(1) 16M x 64	(1) 4M x 64	None
192MB	(1) 16M x 64	(1) 8M x 64	None
256MB	(1) 32M x 64	None	None

Note: Board accepts EDO & SDRAM memory.			

<b>CACHE CONFIGURATION</b>
Note: 256KB/512KB cache is located on the Pentium II CPU.

<b>CPU SPEED SELECTION</b>			
CPU speed	Clock speed	Multiplier	JP1
233MHz	66MHz	3.5x	Closed
266MHz	66MHz	4x	Closed
300MHz	66MHz	4.5x	Closed
333MHz	66MHz	5x	Closed
350MHz	100MHz	3.5x	Open
400MHz	100MHz	4x	Open
450MHz	100MHz	4.5x	Open
500MHz	100MHz	5x	Open